

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-2S17D8-263

CW-B8675

CATALOG LISTING
V7-2S17D8-263
PAGE 1 OF 1

ISSUE
M
6

REPLACES
PR-18505

CHECK

CHECK

29 AUG 90

DAW



CHECK

27 AUG 90

WLS

REVISIONS

A	CO-69205	BAB	7 JAN 91
B	CO-76417	JAL	22 NOV 93
C	CO-77116	DCS	4 APR 94
D	CO82776	JAF	5 APR 96
E	CO-93311	TSM	23 OCT 98

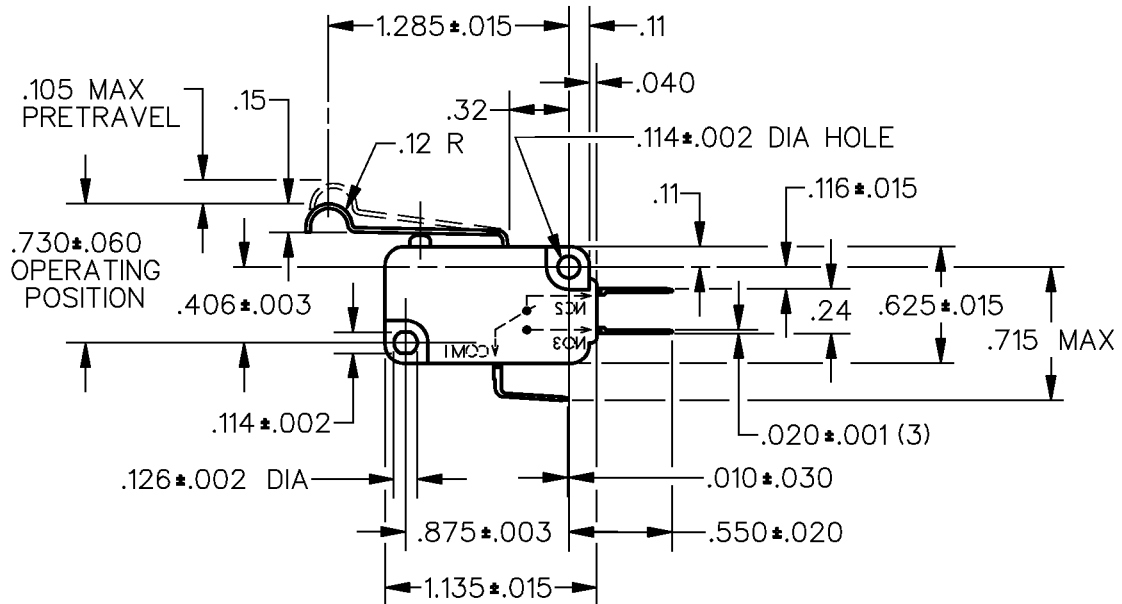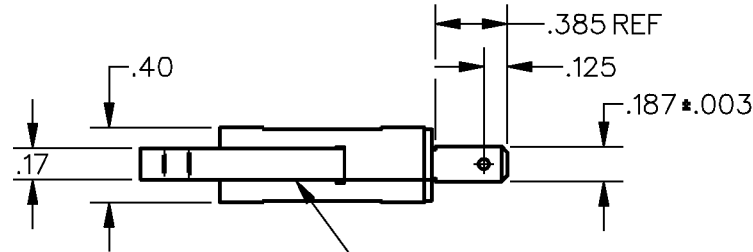


NOTES

- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----50 GRAMS MAX
RELEASE FORCE -----3 GRAMS MIN
DIFFERENTIAL TRAVEL-----.030 MAX
OVERTRAVEL -----.075 MIN
RELEASE TRAVEL -----.015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

0.1A 125 VAC L142



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT

FORMTEK

DRAWN