

MICRO SWITCH
a Honeywell Division



FED. MFG. CODE 91929

SWITCH — BASIC

CATALOG LISTING

V7-4S27D8

CW-C4155

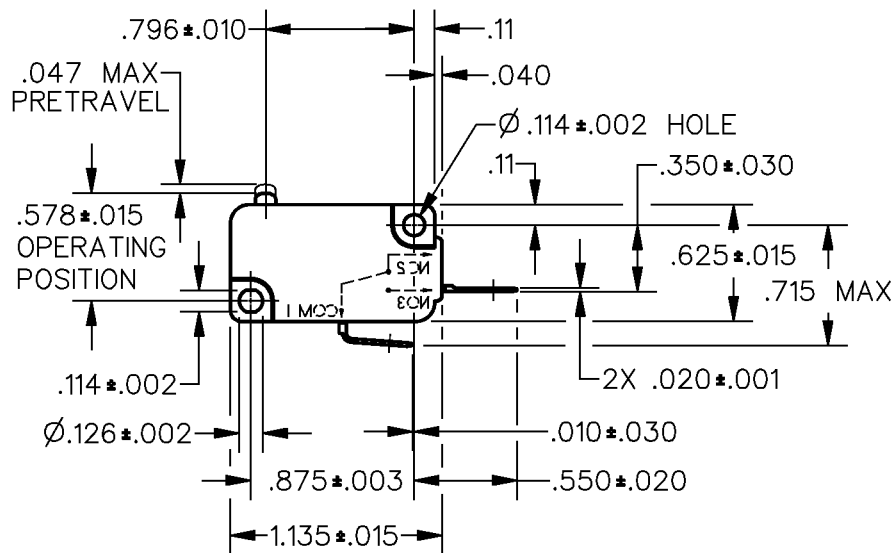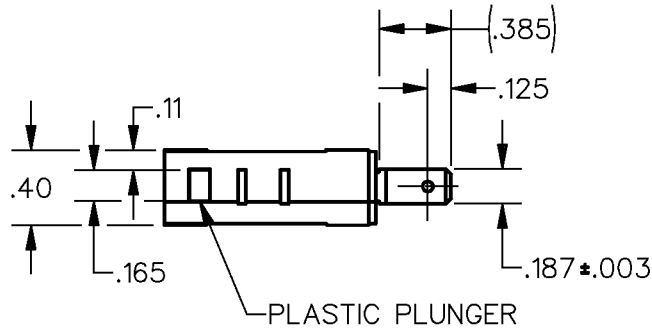


NOTES

- 1 — IN INSPECTION, DO NOT BURN OUT — GOLD CONTACTS
- 2 — IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS		ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 25 GRAMS MAX		CONTACT ARRANGEMENT	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
DIFFERENTIAL TRAVEL — — — .002-.010		S P N O		
OVERTRAVEL — — — — .050 MIN		L142 0.1A 125 VAC	ONE PLACE (.0)	± .030
FREE POSITION — — — — .625 MAX			TWO PLACE (.00)	± .015
RELEASE TRAVEL — — — — .010 MIN			THREE PLACE (.000)	± .005
			ANGLES	±
			WEIGHT	



REPLACES X100135-V7

RELEASE NO. PR-22070

CHECK

CATALOG LISTING V7-4S27D8 PAGE 1 OF 1

ISSUE

2

CHECK

REVISIONS

CO-93311

TSM

26 OCT 98

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

FORMTEK

DRAWN

DCS

24 FEB 96