

MICRO SWITCH
a Honeywell Division



FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

V7-5S18E9-000-1

CW-C5101

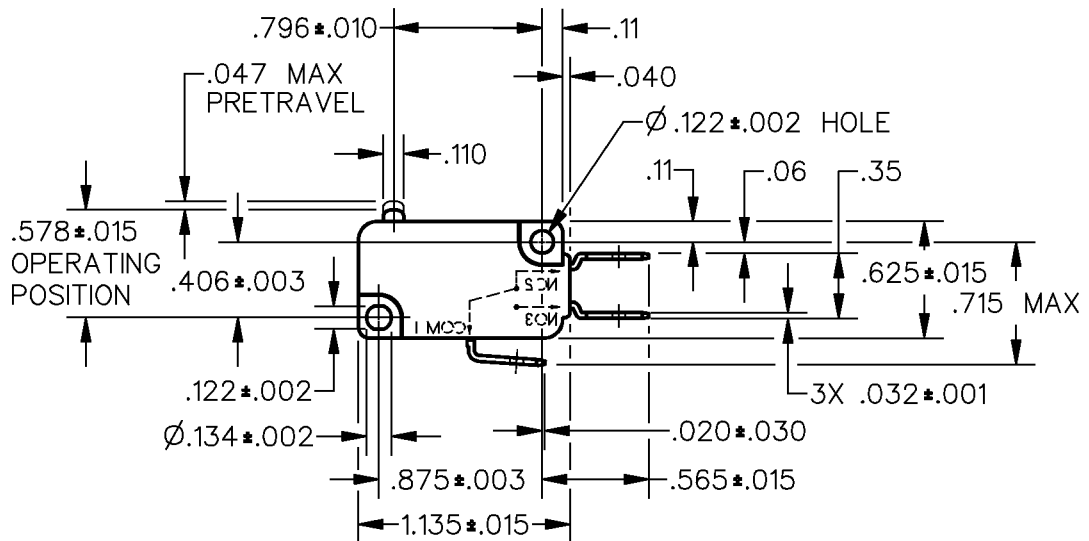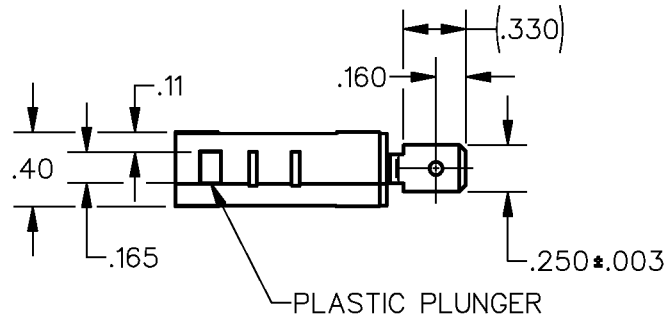

NOTES


1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS

2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 15 GRAMS MAX
 DIFFERENTIAL TRAVEL — — — .006 MAX
 OVERTRAVEL — — — — — .050 MIN
 FREE POSITION — — — — — .625 MAX
 RELEASE TRAVEL — — — — — .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
 S P D T

L142

0.1A 125 VAC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ± .030

TWO PLACE (.00) ± .015

THREE PLACE (.000) ± .005

ANGLES ±

WEIGHT

DDM/CAD

DRAWN

DCS 29 MAY 97 CHECK