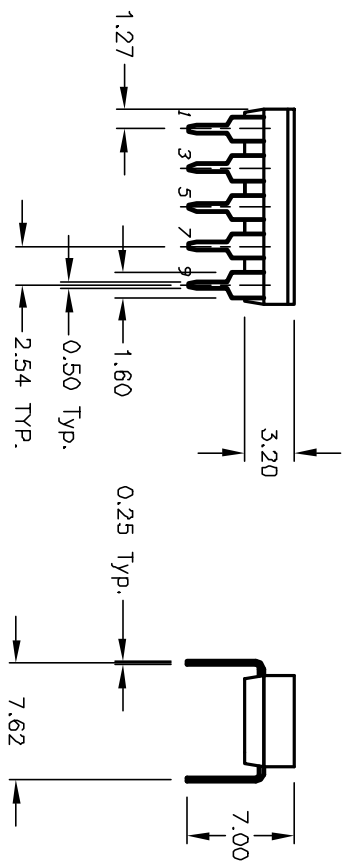

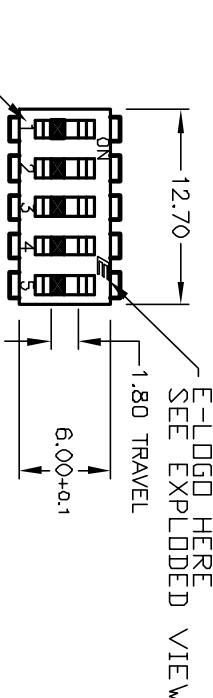


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (Switch)  
100mA @50VDC. (Carry)
5. CONTACT MATERIAL:  
CONTACTS: (MOVABLE) Copper w/Gold Plate  
TERMINALS: BRASS w/Tin Plate
6. INSULATION RESISTANCE:  
100 Mega-ohms min. @500VDC
7. CONTACT RESISTANCE:  
50 MILLI-ohms typical @2-4VDC @100mA
8. OPERATING TEMP.:  
-40°C to +80°C
9. PACKAGE: IN DISPENSING TUBES  
WITH ALL POLES IN THE "OFF" POSITION.

RECOMMENDED P.C.B. LAYOUT

|                                                                                                              |         |                         |         |       |                    |     |     |
|--------------------------------------------------------------------------------------------------------------|---------|-------------------------|---------|-------|--------------------|-----|-----|
| REVISED E-LOGD                                                                                               |         |                         |         | TITLE |                    |     |     |
| B                                                                                                            | 12226   | RELEASED FOR PRODUCTION | 7/5/02  | CJB   | KAJ05 SH GT (GOLD) |     |     |
| A                                                                                                            | 12226   | DESCRIPTION             | 6/14/02 | CJB   |                    |     |     |
| REV.                                                                                                         | ECN No. | DATE                    | CHKD    | SCALE | DATE               | DR  | REV |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |         |                         |         | 2:1   | 6/14/02            | CJB | B   |