




Pos. 1 Designate
Pin #1 Location

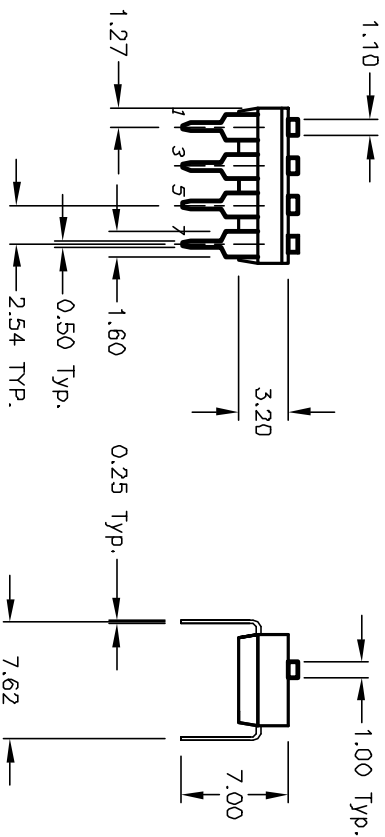

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (Switch)
100mA @50VDC. (Carry)
5. CONTACT MATERIAL:
CONTACTS: (MOVABLE) Copper w/Gold Plate
TERMINALS: BRASS w/Gold Plate
6. INSULATION RESISTANCE:
100 Mega-ohms min. @500VDC
7. CONTACT RESISTANCE:
50 MILLI-ohms typical @2-4VDC @100mA
8. OPERATING TEMP.:
-40°C to +80°C
9. PACKAGE: IN DISPENSING TUBES
WITH ALL POLES IN THE "OFF" POSITION.

RECOMMENDED P.C.B. LAYOUT

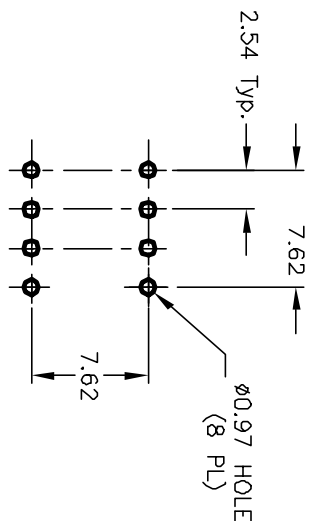

TITLE			
KAJ04 LH GT (GOLD) LOW PROFILE W/STRAIGHT PINS			
SCALE			
2:1			
DATE			
6/14/02			
DR			
CJB			
DWG			
W822124			
REV			
A			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
DESCRIPTION			
DATE			
CHKD			
RELEASED FOR PRODUCTION			
6/14/02			
CJB			
12293			
ECN No.			
REV.			
A			

E-SWITCH®