



Pos. 1 Designate
Pin #1 Location

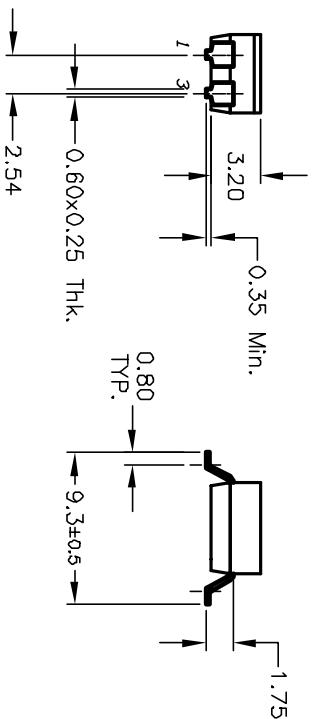

CIRCUIT 2 POSITION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (Switch)
100mA @50VDC. (Carry)


▲ 5. CONTACT MATERIAL:

CONTACTS: (MOVABLE) Copper w/Gold Plate

TERMINALS: BRASS w/Gold Plate

6. INSULATION RESISTANCE:
100 Mega-ohms min. @500VDC
7. CONTACT RESISTANCE:
50 MILLI-ohms typical @2-4VDC @100mA
8. OPERATING TEMP.:
-40°C to +80°C
9. PACKAGE: IN DISPENSING TUBES
WITH ALL POLES IN THE "OFF" POSITION.

RECOMMENDED P.C.B. LAYOUT



TITLE			
KAJ02 SG GT (GOLD) LOW PROFILE W/O TAPE			
SCALE			
2:1			
DATE			
7/1/02			
DR			
CJB			
DWG			
W825222			
REV			
A			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

RELEASED FOR PRODUCTION

7/1/02

CJB

CHKD