



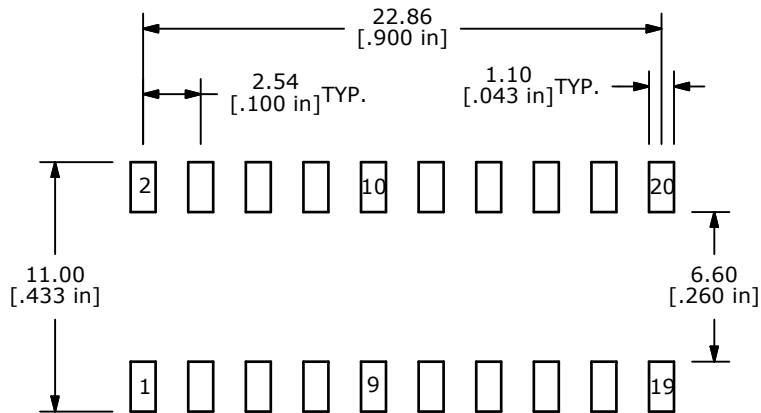





P.C.B. LAYOUT

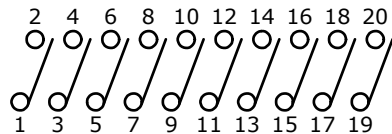

10 POSITION CIRCUIT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = $\pm .4$
X.XX = $\pm .25$
3. TERM. NOS. FOR REFERENCE ONLY
- ▲ 4. CONTACT RATING: 25mA @ 24VDC (SWITCH)
100mA @ 50VDC (CARRY)
5. CONTACT MATERIAL: CONTACTS: (MOVABLE) COPPER w/ GOLD PLATE
TERMINALS: BRASS w/ GOLD PLATE
6. INSULATION RESISTANCE: 100M OHMS MIN. @ 500VDC
7. CONTACT RESISTANCE: 50m OHMS TYP.
8. OPERATING TEMP: -40°C TO + 85°C
- ▲ 9. PACKAGE: TAPE and REEL, 1000 PCS / REEL
10. 2002/95/EC (ROHS) COMPLIANT
11. ▲ DENOTES CRITICAL PARAMETERS

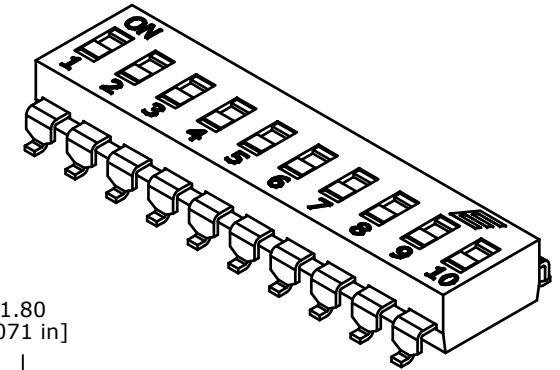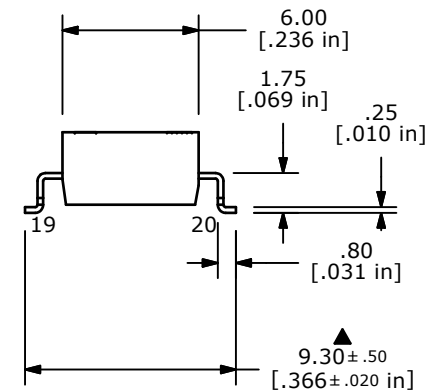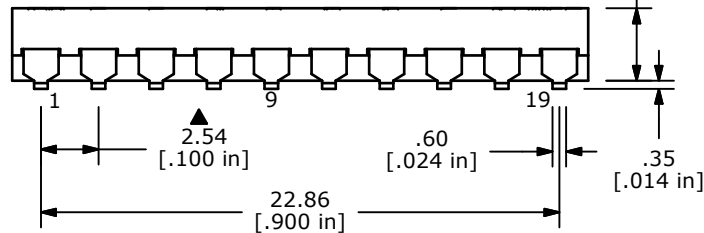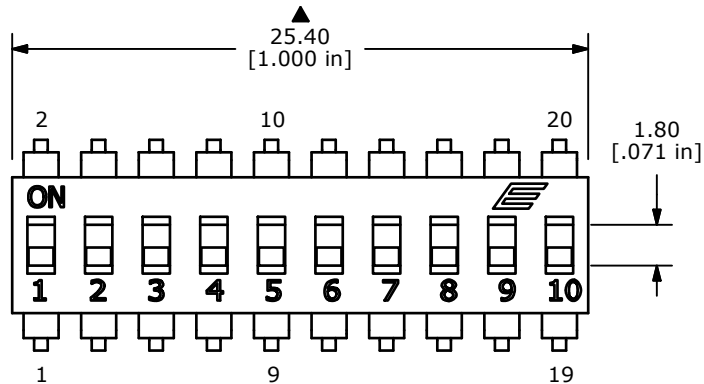

TITLE KAJ10SGGR

SCALE 3:1

DATE 5/9/2011

DR BGL

DWG W825232

REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

A	19929	RELEASE FOR PRODUCTION	5/9/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY