



Pos. 1	Designate
Pin #1	Location

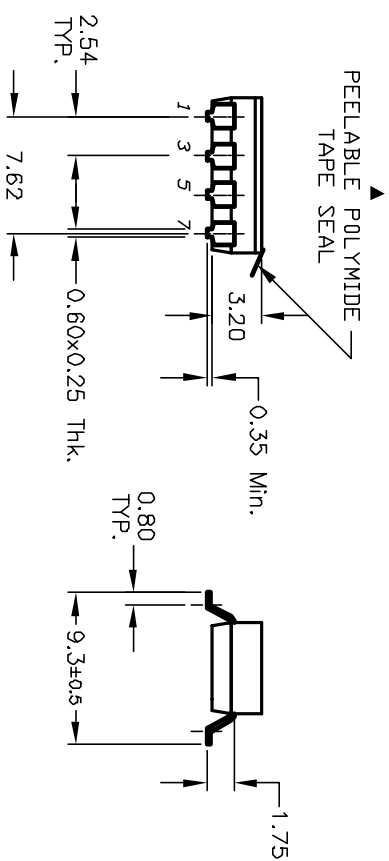

CIRCUIT 4 POSITION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @ 24VDC.
5. CONTACT MATERIAL:
CONTACTS: BRASS w/Gold Plate
TERMINALS: BRASS w/GOLD Plate
6. PACKAGED: DISPENSING TUBES
WITH ALL POLES IN THE "OFF" POSITION.
7. TAPE SEAL FOR FLUX WASH.
8. ▲ DESIGNATE MAJOR:

RECOMMENDED P.C.B. LAYOUT

RECOMMENDED P.C.B. LAYOUT				
A	12277	RELEASED FOR PRODUCTION	7/1/02	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

E-SWITCH®				
TITLE				
KAJ04 TG GT LOW PROFILE W/TAPE SEAL				
SCALE	DATE	DR	JWG	REV
2:1	7/1/02	CJB	W825324	A