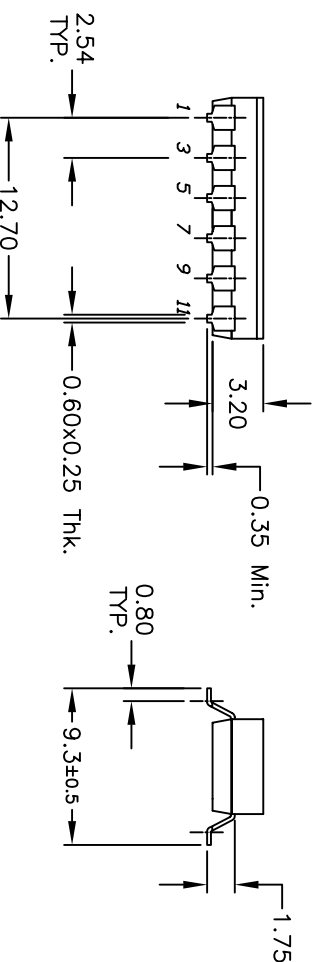

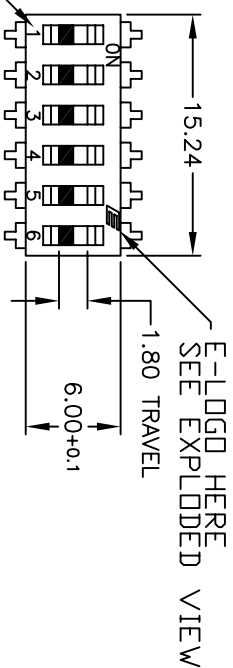



CIRCUIT 6 POSITION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (Switch)
100mA @50VDC. (Carry)

5. CONTACT MATERIAL:

- CONTACTS: (MOVABLE) Copper w/Gold Plate
- TERMINALS: BRASS w/Gold Plate
- INSULATION RESISTANCE:
100 Mega-OHMS min. @500VDC
- CONTACT RESISTANCE:
50 mILLI-OHMS typical @2-4VDC @100mA
- OPERATING TEMP.;
-40°C to +80°C
- PACKAGE: TAPE AND REEL (1,000 PER REEL)
WITH ALL POLES IN THE "OFF" POSITION.
- ▲ DENOTES CRITICAL PARAMETER
- 2002/95/EC (ROHS) COMPLIANT

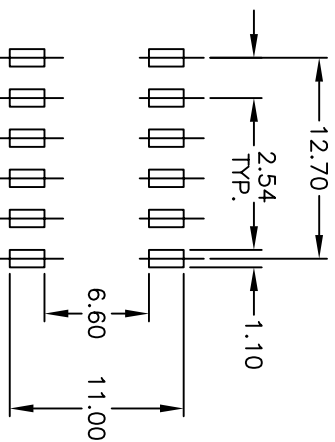

RECOMMENDED P.C.B. LAYOUT



			TITLE			
A	15732	RELEASED FOR PRODUCTION	2/8/06	PH	KAJ06 SG GR	
REV.	ECN No.	DESCRIPTION	DATE	CHKD		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED						
SCALE		DATE	DR	DWG	REV	
2:1		2/8/08	PH	W825385	A	