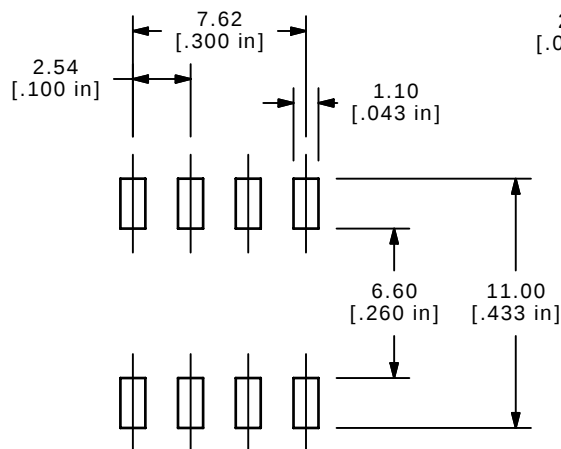





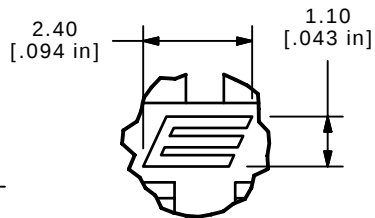

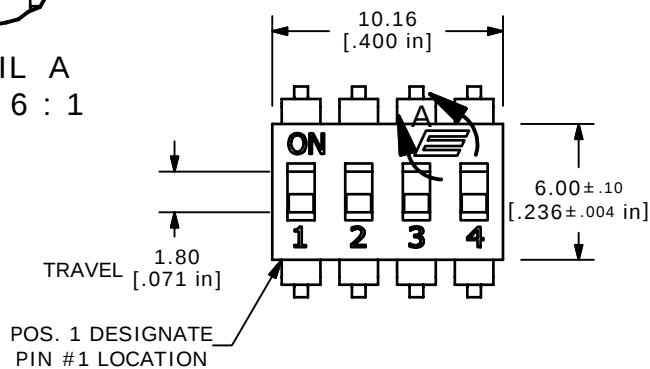
P.C. MOUNTING



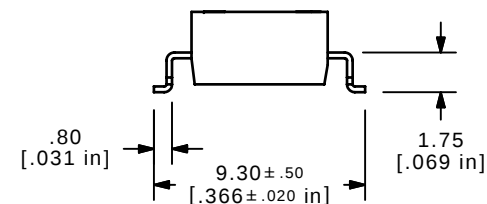
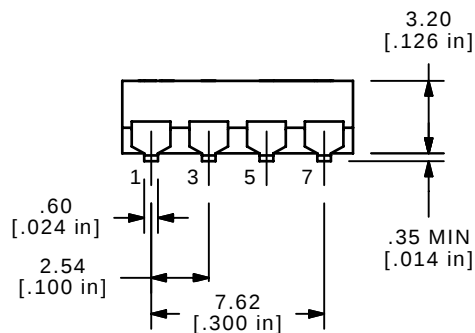
CIRCUIT - 4 POSITION

## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE:  $X.X = \pm 0.4$   
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (Switch)  
100mA @50VDC. (Carry)
- ▲5. CONTACT MATERIAL:  
CONTACTS: (MOVABLE) COPPER W/GOLD PLATE  
TERMINALS: BRASS W/GOLD PLATE
6. INSULATION RESISTANCE; 100 MEGA-OHMS MIN. @500VDC
7. CONTACT RESISTANCE; 50 MILLI-OHMS TYPICAL @2-4VDC @100mA INITIAL
8. OPERATING TEMP: -30°C TO +85°C
9. STORAGE TEMP: -40°C TO +85°C
10. MECHANICAL LIFE: 2000 CYCLES
- ▲11. PACKAGE: TUBE  
WITH ALL POLES IN THE "OFF" POSITION.
12. ▲ DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMPLIANT

DETAIL A  
SCALE 6 : 1

ISOMETRIC

**E-SWITCH®**

TITLE KAJ04SGGT

|     |        |                     |        |    |
|-----|--------|---------------------|--------|----|
| B   | 16816  | REVISED AND REDRAWN | 1/2/07 | TN |
| REV | PCR NO | DESCRIPTION         | DATE   | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 3:1

DATE 1/2/2007

DR TN

DWG W825414

REV B