
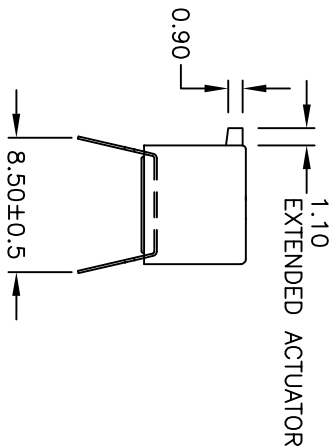
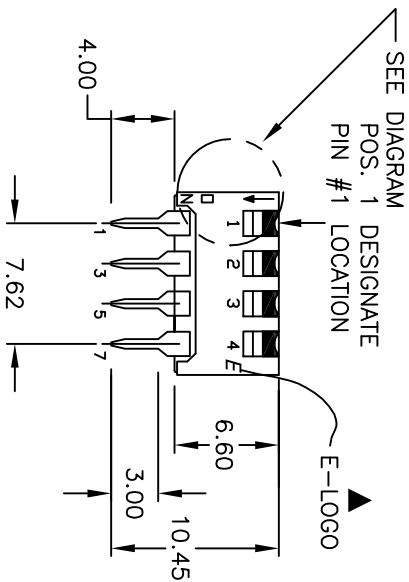
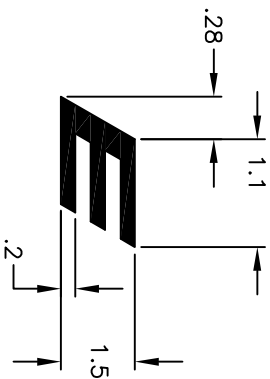
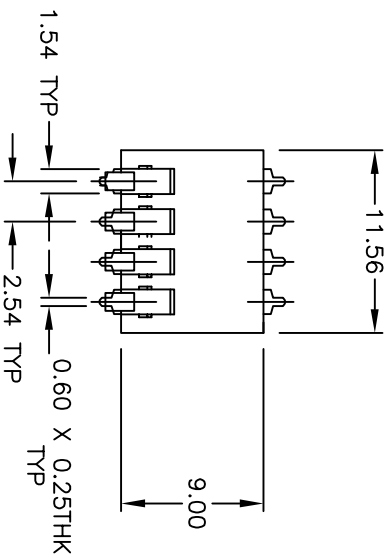



CIRCUIT 4 POSITION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (Switch)
100mA @50VDC. (Carry)
5. CONTACT MATERIAL:
CONTACTS: (MOVABLE) Copper w/Gold Plate
TERMINALS: BRASS w/Gold Plate
6. INSULATION RESISTANCE:
100 Mega-OHMS min. @500VDC
7. CONTACT RESISTANCE:
50 MILLI-OHMS typical @2-4VDC @100mA
8. OPERATING TEMP.:
-40°C to +80°C
9. PACKAGE: IN DISPENSING TUBES
WITH ALL POLES IN THE "OFF" POSITION.

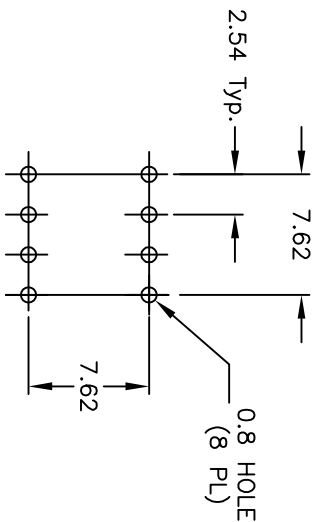

DIAGRAM

SEE NOTE 9

RECOMMENDED P.C.B. LAYOUT

E-SWITCH®					TITLE				
KAR04 LA GT (GOLD)									
B	17827	CHANGED DIM. 11.90 TO 11.56	10/31/07	BF					
A	12233	RELEASED FOR PRODUCTION	7/30/02	CJB					
REV.	ECN No.	DESCRIPTION	DATE	CHKD					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE				
					2:1				
					DATE				
					10/31/07				
					DR				
					BF				
					DWG				
					W827024				
					REV				
					B				