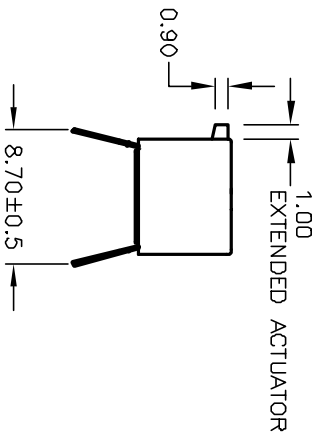
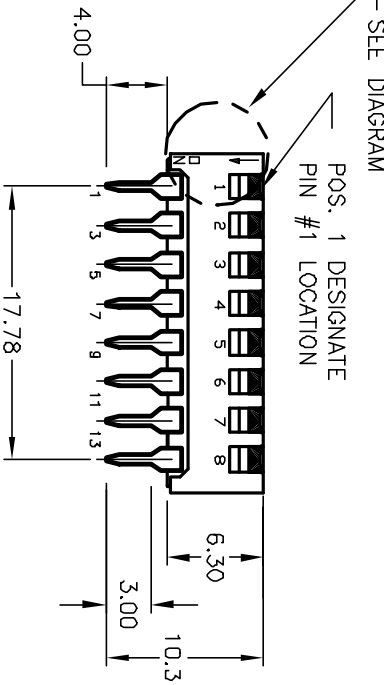
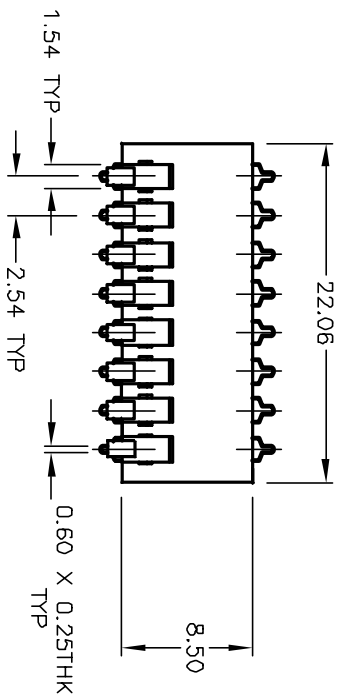


CIRCUIT 8 POSITION

NOTES:

1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. CONTACT RATINGS: 25mA @24VDC. (Switch)
100mA @50VDC (Carry)
 5. CONTACT MATERIAL:
CONTACTS: BRASS w/Gold Plate
TERMINALS: BRASS w/Gold Plate
 6. INSULATION RESISTANCE:
100 Mega-Ohms min. @500VDC
 7. CONTACT RESISTANCE:
50 milli-Ohms typical @ 2-4VDC @100mA
 8. OPERATING TEMP.: -40°C to +85°C
 9. PACKAGED: IN DISPENSING TUBES
- WITH ALL POLES IN THE "OFF" POSITION.





DIAGRAM
SEE NOTE 9

RECOMMENDED P.C.B. LAYOUT

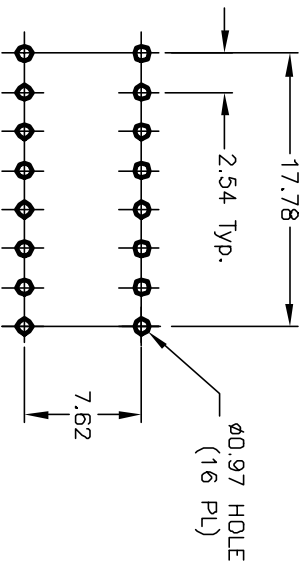

TITLE			
A	12233	RELEASED FOR PRODUCTION	6/12/02
REV.	ECN No.	DESCRIPTION	DATE
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE			
2:1			
DATE			
6/12/02			
DR			
CJB			
DWG			
W827027			
REV			
A			

E-SWITCH®

KAR08 LA GT