

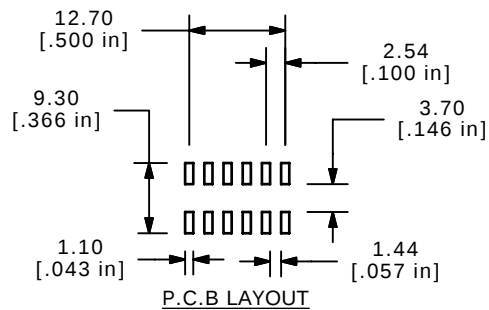

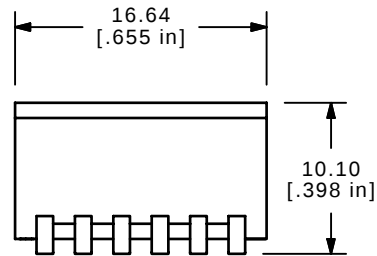


CIRCUIT - 6 POSITION

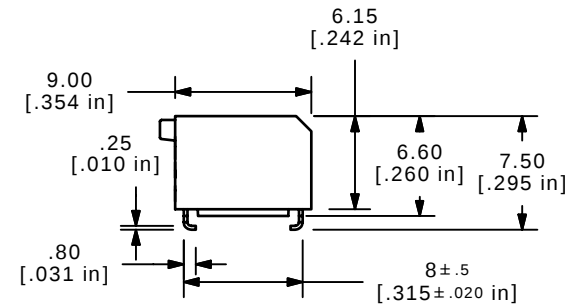

P.C.B LAYOUT

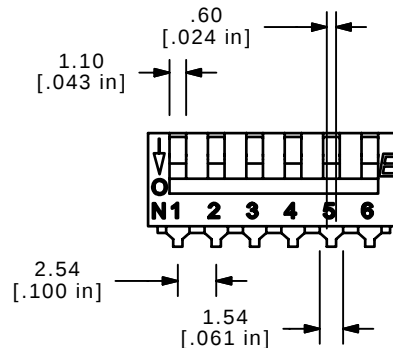

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (Switch)
100mA @50VDC. (Carry)
- ▲5. CONTACT MATERIAL:
CONTACTS: (MOVABLE) COPPER W/GOLD PLATE
TERMINALS: BRASS w/GOLD PLATE
6. INSULATION RESISTANCE; 1000 MEGA-OHMS MIN. @500VDC
7. CONTACT RESISTANCE; 50 MILLI-OHMS @2-4VDC @100mA INITIAL
8. OPERATING TEMP: -30°C TO +85°C
9. STORAGE TEMP: -40°C TO +85°C
10. MECHANICAL LIFE: 2000 CYCLES
11. PACKAGE: TAPE AND REEL
WITH ALL POLES IN THE "OFF" POSITION.
12. ▲DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMPLIANT


E-SWITCH®

TITLE KAR06LJGR


A	16257	RELEASED FOR PRODUCTION	7/27/06	BO
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



SCALE	DATE	DR	DWG	REV
2:1	7/27/2006	BO	W828417	A

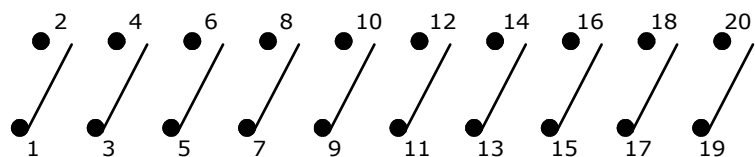



CIRCUIT - 10 POSITION

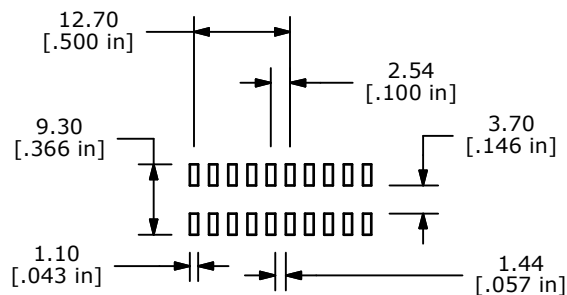

P.C.B LAYOUT

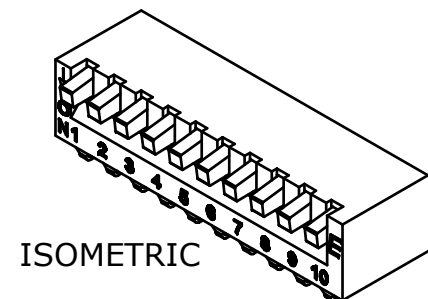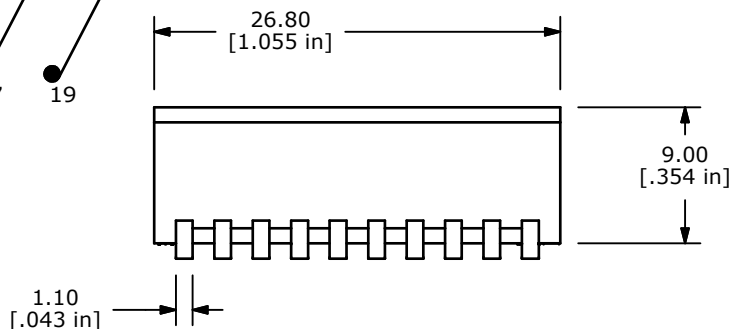

ISOMETRIC

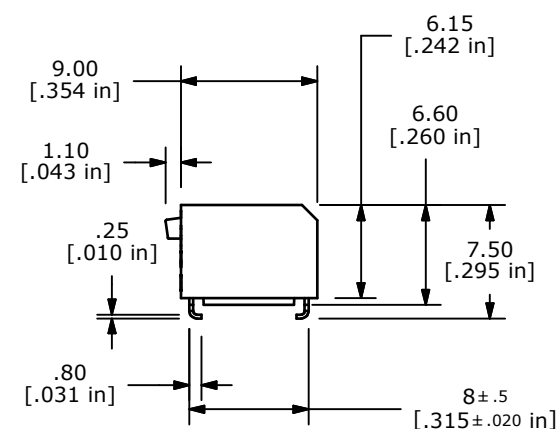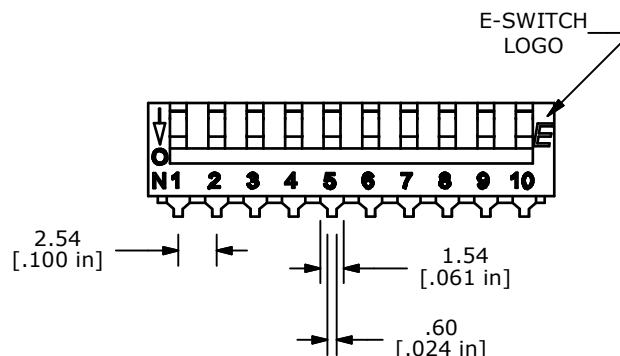

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (Switch)
100mA @50VDC. (Carry)
- ▲5. CONTACT MATERIAL:
CONTACTS: (MOVABLE) COPPER W/GOLD PLATE
TERMINALS: BRASS w/GOLD PLATE
6. INSULATION RESISTANCE; 100 MEGA-OHMS MIN. @500VDC
7. CONTACT RESISTANCE; 50 MILLI-OHMS @2-4VDC @100mA INITIAL
8. OPERATING TEMP: -30°C TO +85°C
9. STORAGE TEMP: -40°C TO +85°C
10. OPERATING LIFE: 500 CYCLES, EACH CIRCUIT
11. PACKAGE: TAPE AND REEL
WITH ALL POLES IN THE "OFF" POSITION.
12. ▲ DENOTES CRITICAL PARAMETER.
13. 2002/95/EC (ROHS) COMPLIANT



TITLE KAR10LJGR

A	18278	RELEASED FOR PRODUCTION	10/23/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
2:1	10/23/2008	BLR	W828429	A