

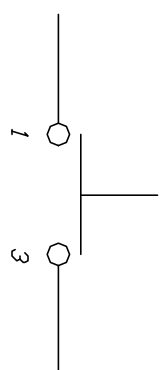
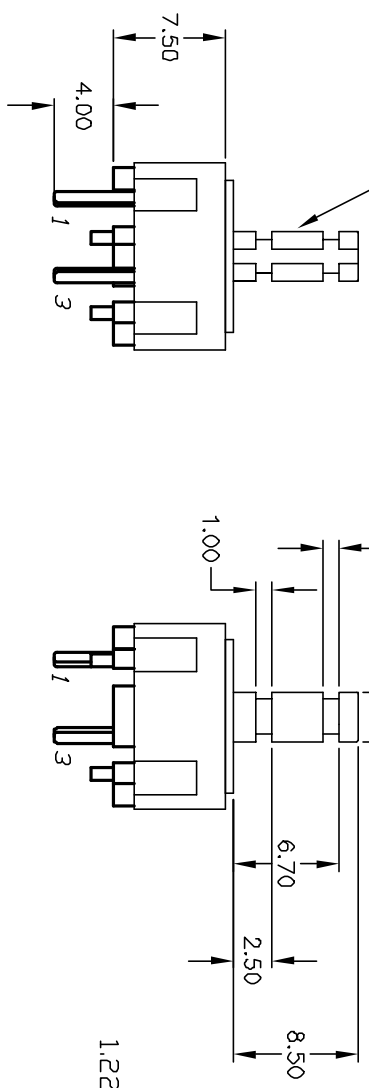


320.03 CAP BLK
(B040303)

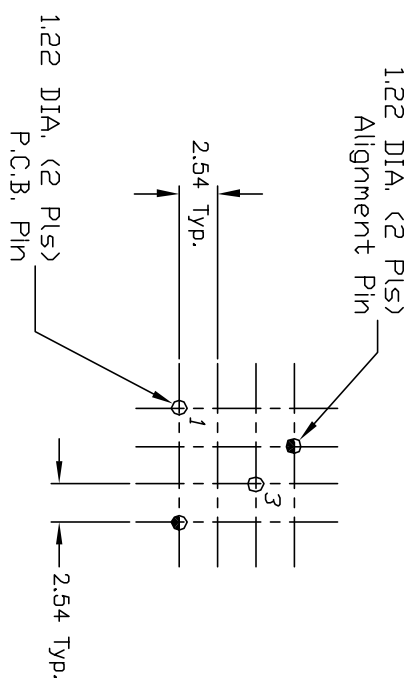

CIRCUIT: SPST
CONTACT CONFIGURATION

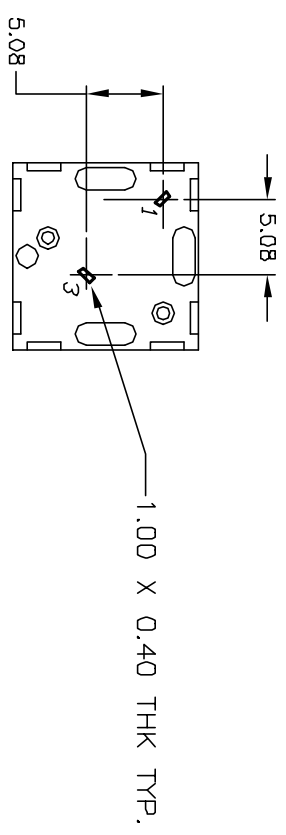

RECOMMEND P.C.B. LAYOUT

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 25mA, @50V DC
5. OPERATING FORCE: 120gf
6. CONTACT MATERIAL: GOLD CONTACTS
7. TRAVEL: .7MM [.028"]

▲6. CONTACT MATERIAL: GOLD CONTACTS									
7. TRAVEL: .7MM [.028"]									
A	11393	RELEASED FOR PRODUCTION	9/25/01	CJC					
REV.	ECN No.	DESCRIPTION	DATE	CHKD					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									

TITLE				
330.03 E1-1 BLK (GOLD CONTACTS)				
SCALE	DATE	DR	DWG	REV
2:1	9/25/01	CJC	XB07094	A

E-SWITCH®				
------------------	--	--	--	--

E-SWITCH®