
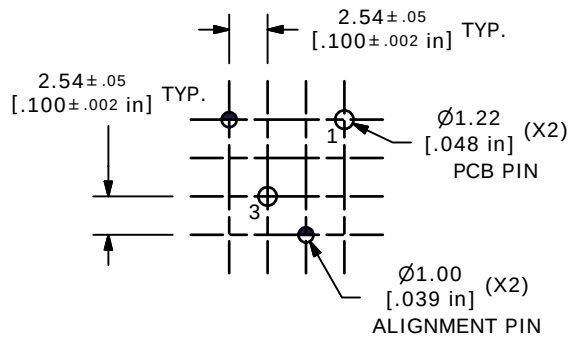

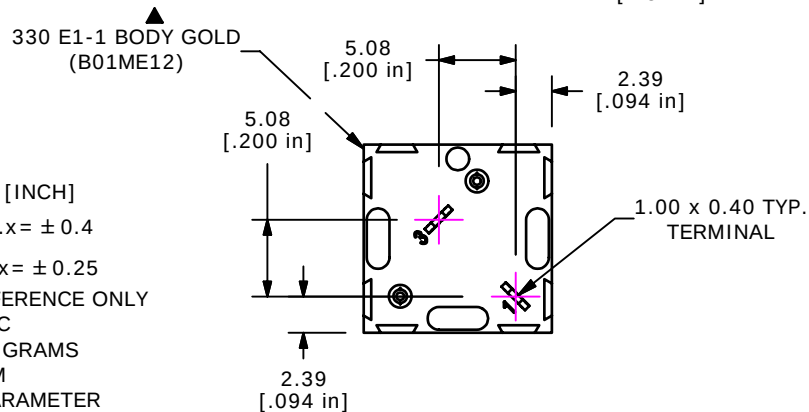
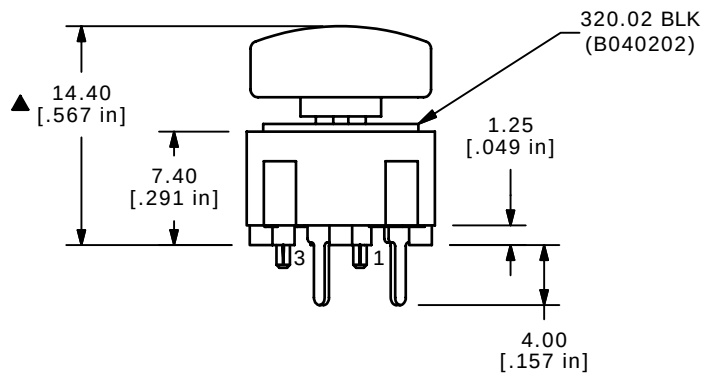


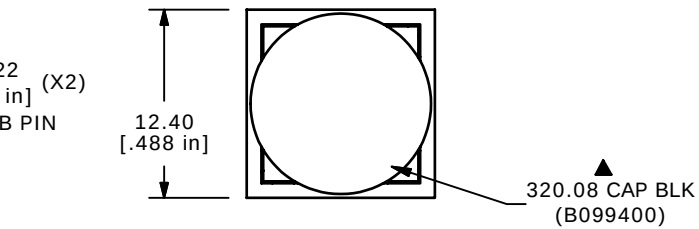


RECOMMENDED P.C.B. LAYOUT

CIRCUIT: SPST
CONTACT CONFIGURATION


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: x.x = ± 0.4
x.xx = ± 0.25
3. TERMINAL NO'S FOR REFERENCE ONLY
4. RATING: 25mA, @ 50VDC
- ▲ 5. OPERATING FORCE: 120 GRAMS
6. TRAVEL TO MAKE: 0.7MM
7. ▲ DENOTES CRITICAL PARAMETER
8. 2002/95/EC (ROHS) COMPLIANT



ISOMETRIC

320 E1-1 CONTACT
(B050001)



TOP VIEW W/CAP REMOVED

E-SWITCH®

TITLE 330.02E11.08BLK

SCALE
2:1DATE
5/26/2006DR
CTDWG
XB0807AREV
A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

A	16055	NEW PART RELEASE	5/26/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY