
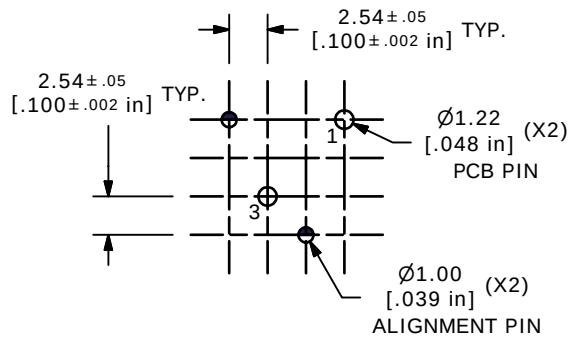

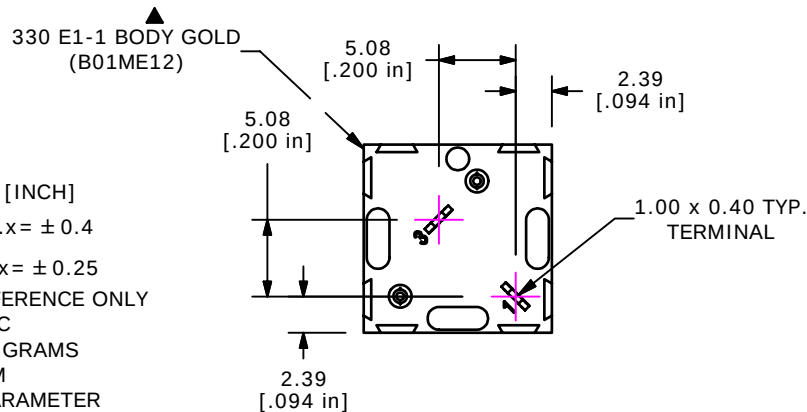
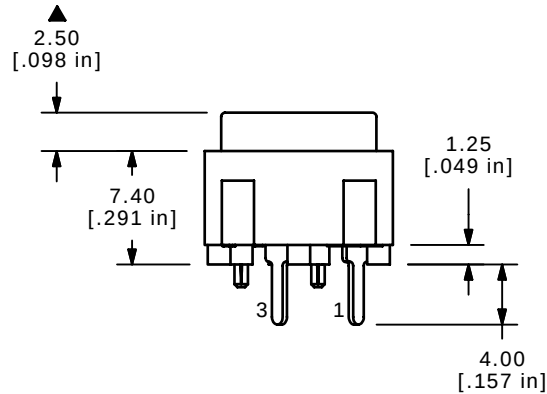





RECOMMENDED P.C.B. LAYOUT

CIRCUIT: SPST
CONTACT CONFIGURATION

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: x.x = ± 0.4
x.xx = ± 0.25
 3. TERMINAL NO'S FOR REFERENCE ONLY
 4. RATING: 25mA, @ 50VDC
 - ▲ 5. OPERATING FORCE: 120 GRAMS
 6. TRAVEL TO MAKE: 0.7MM
 7. ▲ DENOTES CRITICAL PARAMETER
 8. 2002/95/EC (ROHS) COMPLIANT

320 CAP WHT
(B040001)

ISOMETRIC

320 E1-1 CONTACT
(B050001)

TOP VIEW W/CAP REMOVED

E-SWITCH®

TITLE 330E11WHT

SCALE 2:1

DATE 1/12/2001

DR CJB

DWG XB0811P

REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

B	16053	REVISED AND REDRAWN	5/25/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY