



TOP VIEW -SHOW ORIENTATION OF LEGENDS
IN RESPECT TO THE PCB PIN TERMINALS.



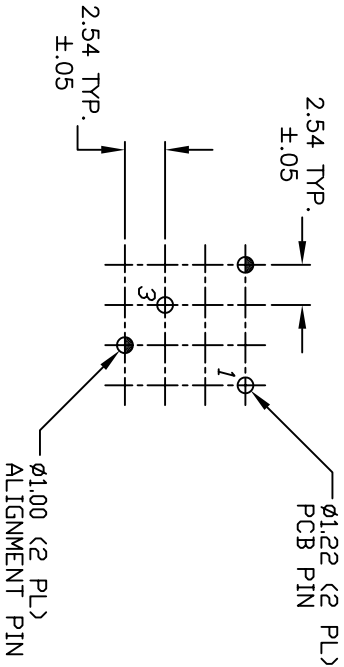


RECOMMENDED P.C.B. LAYOUT

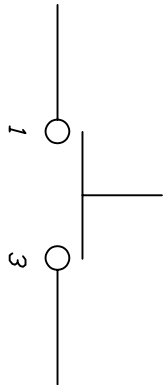

CIRCUIT: SPST
CONTACT CONFIGURATION

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.XX=±0.4
X.XX=±0.25
 3. RATING: 25mA, @50VDC
 4. MECHANICAL LIFE: 1,000,000 CYCLES MIN
 5. CONTACT RESISTANCE: 50mOHMS MAX
INITIAL @ 2-4VDC, 100mA
 6. INSULATION RESISTANCE: 1000 M OHMS MIN
 7. DIELECTRIC STRENGTH: >500VAC RMS
@ SEA LEVEL
 8. ▲ DENOTES CRITICLE PARAMETER
 9. 2002/95/EC (ROHS) COMPLIANT

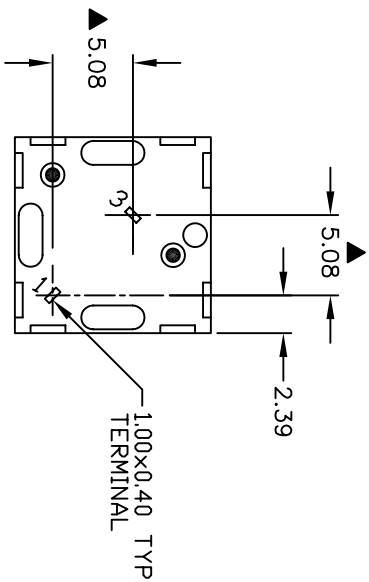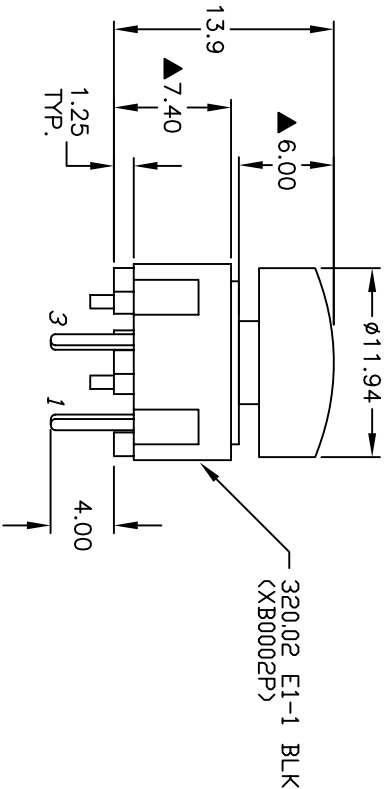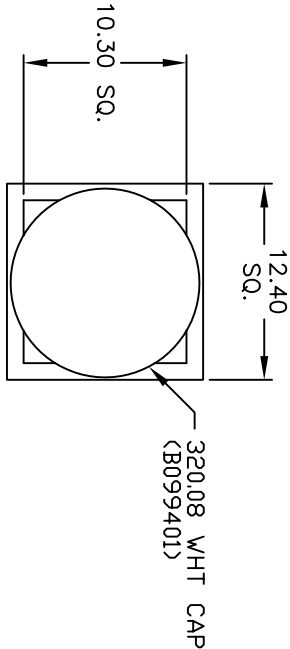

E-SWITCH®

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	16151	RELEASED FOR PRODUCTION	6/19/06	CT
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

TITLE	SCALE	DATE	DR	DWG	REV
320.08EI1 WHT	2:1	6/19/06	CT	XB0813A	A