


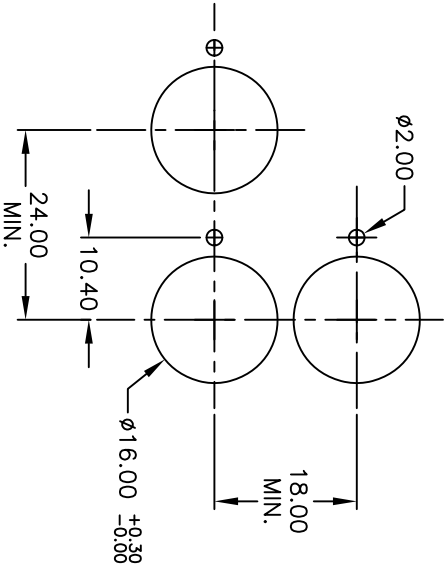




RECOMMENDED PANEL MOUNTING
SCALE 1:1

1 0 1 0 2
3 0 0 4
a-(L)-b (+)


SPST
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATINGS: 5A @250V AC, 8A@125V AC
28V AC/DC 40Ma (INCANDESCENT BULB)
4. CONTACT MATERIAL: COPPER ALLOY W/Gold Plating
5. TRAVEL: 3.0mm

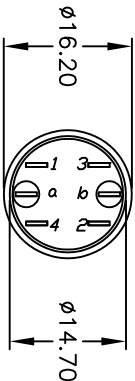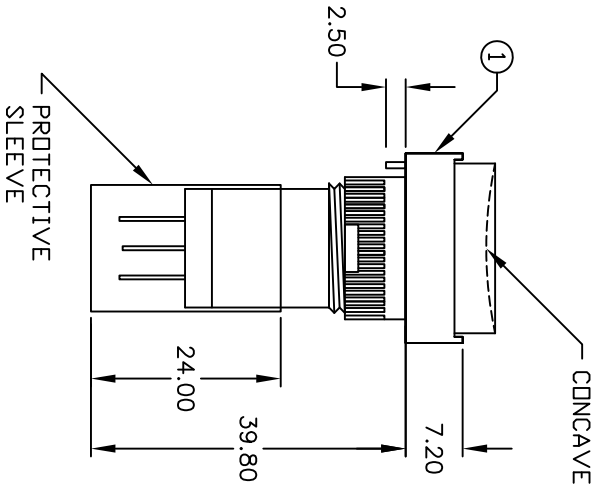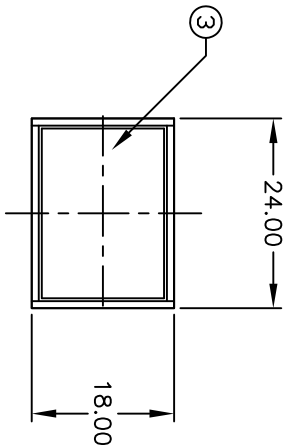

PARTS LIST			
ITEM	QTY.	PART NO.	PART DESCRIPTION
1	1	F040012	P16 OA T11
2	1	F050405	50-004-05 (Incandescent bulb)
3	1	F050205	50-002-05 (Trans Wht lens)

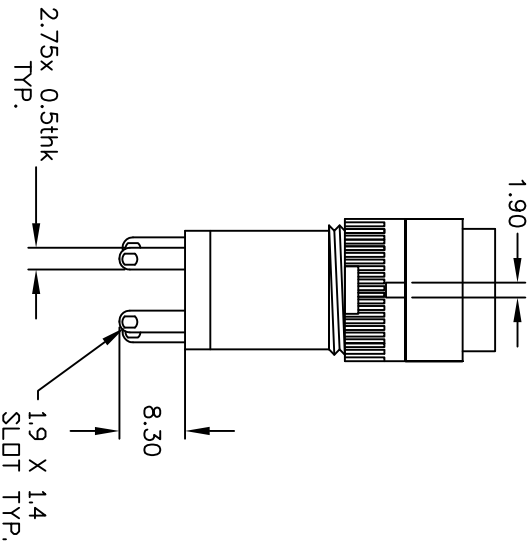

E-SWITCH®

TITLE			
P16 OA T11 C WHT (Momentary)			
REV.	ECN No.	DESCRIPTION	DATE
A	11635	RELEASED FOR PRODUCTION	8/30/01
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE	DATE	DR	DWG
1:1	8/30/01	CB	XF0426P
REV			A