



| ITEM | QTY. | PART NO. | PART DESCRIPTION                 |
|------|------|----------|----------------------------------|
| 1    | 1    | F040016  | D16 EE R12                       |
| 2    | 1    | F050423  | 50-004-23 (RED LED)              |
| 3    | 1    | F051212  | 50-012-12 (RED LENS TRANSPARENT) |



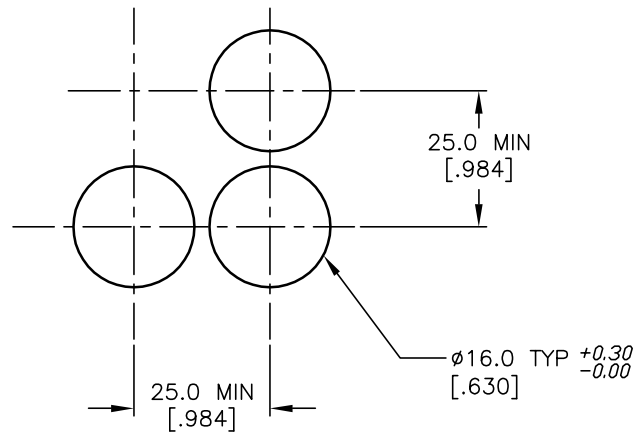


RECOMMEND PANEL MOUNTING



CIRCUIT: DPST

CONTACT CONFIGURATION

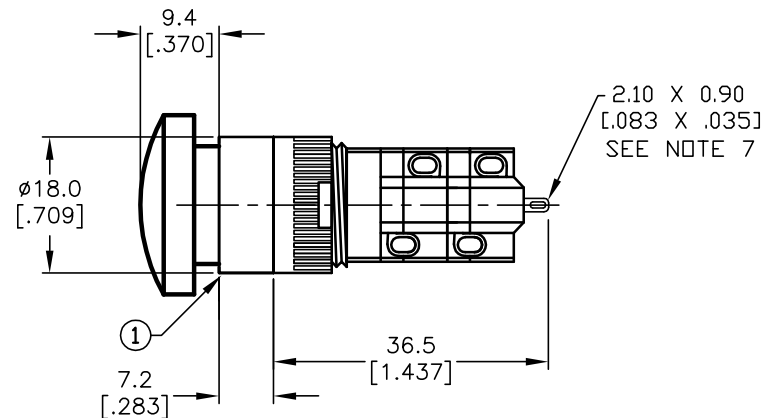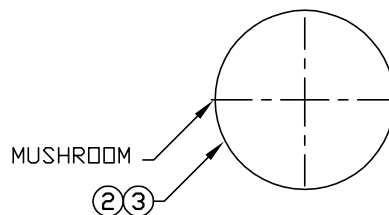

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 5A@250V AC / 8A@125V AC
5. MECHANICAL LIFETIME: >2 MILLION OPERATIONS
6. TRAVEL: 3.0MM
7. CONTACT MATERIAL: COPPER ALLOY W/SILVER PLATING
8. LAMP VOLTAGE: 24V DC

**E-SWITCH®**

|      |         |                         |          |      |
|------|---------|-------------------------|----------|------|
| B    | 14402   | LAMP VOLTAGE            | 10/13/04 | AR   |
| A    | 11823   | RELEASED FOR PRODUCTION | 11/08/01 | CJC  |
| REV. | ECN No. | DESCRIPTION             | DATE     | CHKD |

THE INFORMATION CONTAINED IN THIS DOCUMENT  
IS PROPRIETARY TO E-SWITCH AND IS  
NOT TO BE COPIED OR TRANSFERRED

|                         |                  |           |                |          |
|-------------------------|------------------|-----------|----------------|----------|
| TITLE<br>D16EER2KREDRED |                  |           |                |          |
| SCALE<br>1.5:1          | DATE<br>11/08/01 | DR<br>CJC | DWG<br>XF0427P | REV<br>B |