
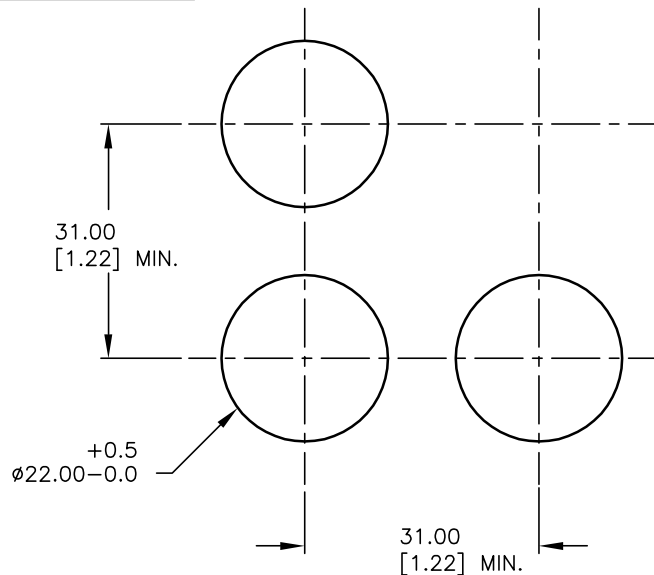
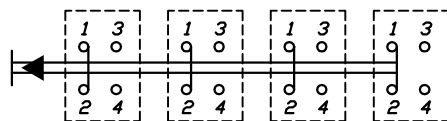


Item	Qty.	Dwg. No.	Part No.
1	1	F051701	29mm RING FOR LA SERIES
2	1	F060618	LASEEU14
3	1	F060214	29mm RED LENS TRANSPARENT
4	1	F050412	RED NEON 110V LAMP

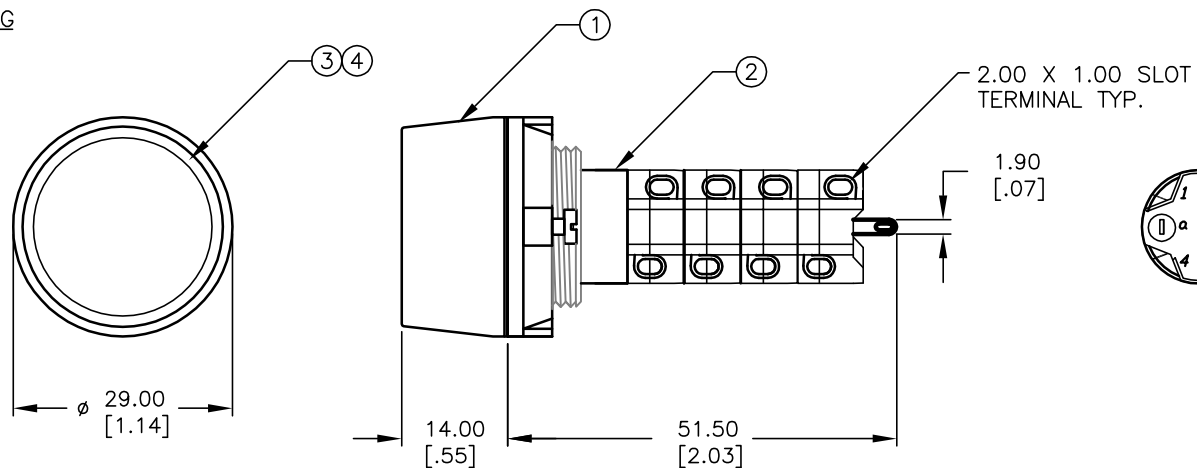

RECOMMENDED PANEL MOUNTING

4PST
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATINGS: 5A@250V AC,
8A@125V AC
4. CONTACT MATERIAL: COPPER ALLOY W/Gold Plating
5. MECHANICAL LIFE: >100,000 Cycles
6. ELECTRICAL LIFE: >50,000 Cycles
7. INSULATION RESISTANCE: >1000 MILLI-OHMS
8. OPERATING TEMP: -20°C to 55°C
- ▲ 9. LAMP VOLTAGE: 110VAC NEON
10. ▲ DENOTES CRITICAL PARAMETER.

E-SWITCH®

TITLE

LASEEU14FREDRED

SCALE

1:1

DATE

6/8/04

DR

AR

DWG

XF0592A

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED