

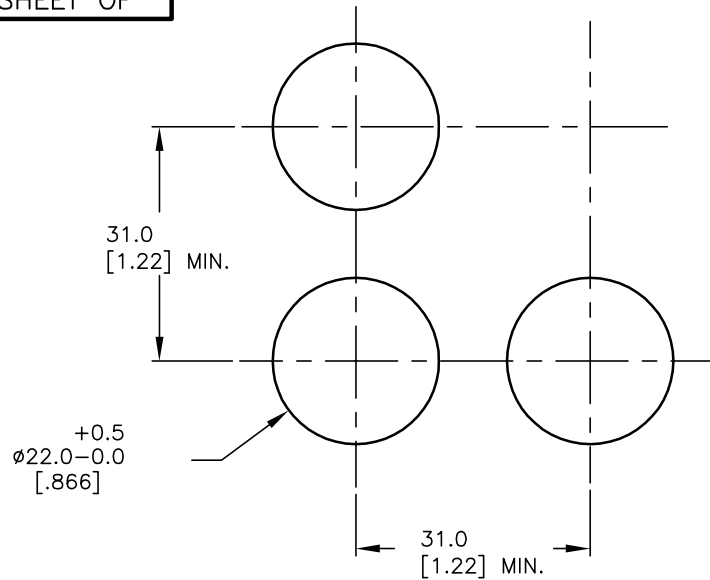



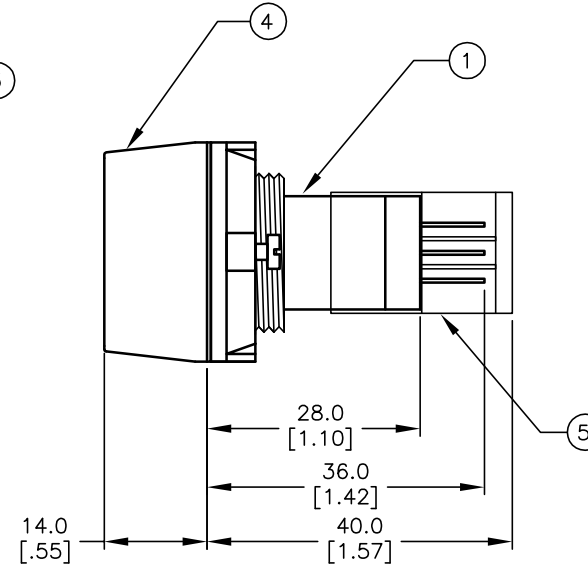

RECOMMEND PANEL MOUNTING

1 o | o 2
 3 o o 4
 a-(L)-b (+)

CONTACT CONFIGURATION

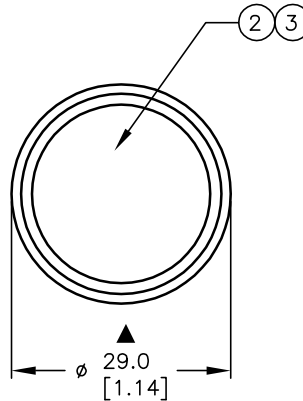

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $0.0 = \pm 0.4$
 $0.00 = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. TRAVEL: 3.0MM
5. MECHANICAL LIFETIME: >2 MILLION OPERATIONS
6. CONTACT MATERIAL: COPPER ALLOY W/ SILVER PALTING
7. RATING: 5A @250VAC
 8A @125VAC
- ▲ 8. LAMP VOLTAGE: 12VDC
9. ▲ DENOTES CRITICAL PARAMETER.

PARTS LIST

ITEM	QTY.	PART NO.	PART DESCRIPTION
1	1	F060620	LAKEEU110
5	1	F050420	50-004-20 (RED 12V LED)
3	1	F060211	29mm BLUE LENS
4	1	F051701	29MM RING FOR LA SERIES
5	1	F051601	P16 PLASTIC TERMINAL PROTECTOR

E-SWITCH®

TITLE

LAKEEU11JREDBLU

SCALE

1:1

DATE

7/7/04

DR

AR

DWG

XF0597A

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
 IS PROPRIETARY TO E-SWITCH AND IS
 NOT TO BE COPIED OR TRANSFERRED

A	14134	RELEASED FOR PRODUCTION	7/7/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD