







ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F040008	D16OAS11
2	1	F050303	50-003-03 TRANSPARENT ORANGE

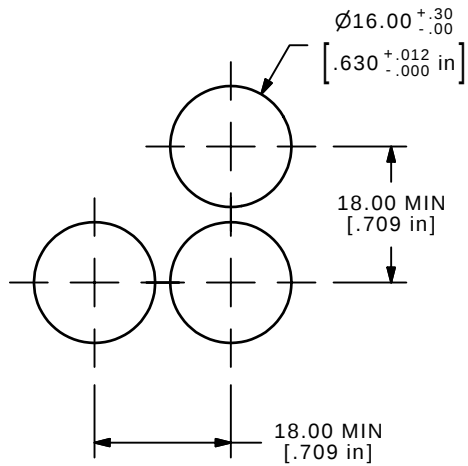

PANEL MOUNTING

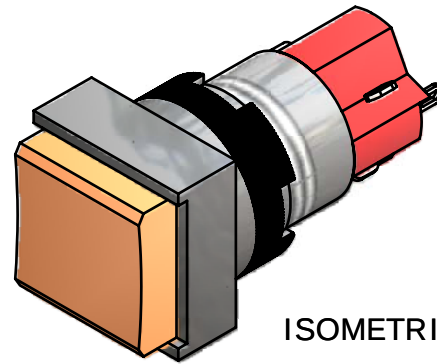

ISOMETRIC

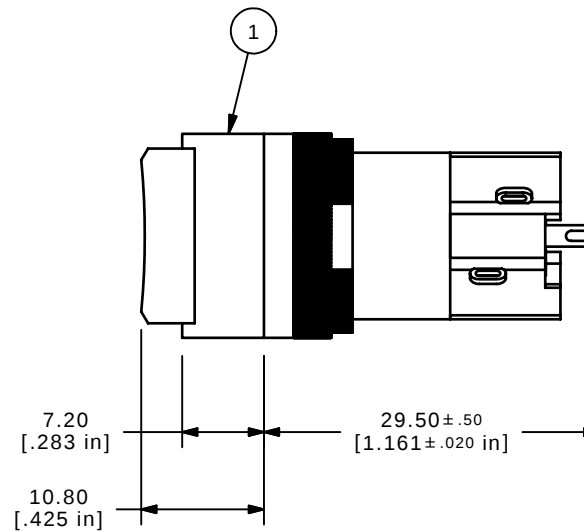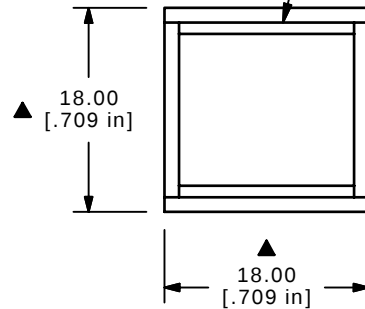

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 5A @ 250 VAC
6A @ 24 VDC
5. ELECTRICAL LIFE: 2,000,000 OPERATIONS
6. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
7. OPERATING TEMP.: -25°C to 70°C
- ▲8. LAMP VOLTAGE: NONE
9. ▲ DENOTES CRITICAL PARAMETER.
10. PACKAGE: BOX/20 PIECES PER BOX
11. 2002/95/EC (ROHS) COMPLIANT



A	17374	RELEASED FOR PRODUCTION	6/12/07	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE D16OAS110ORG

SCALE 1.5:1

DATE 6/12/2007

DR TN

DWG XF0722A

REV A