

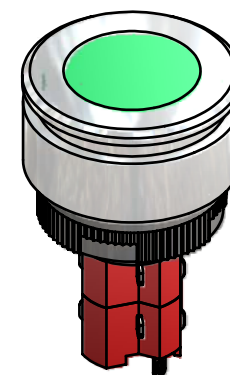
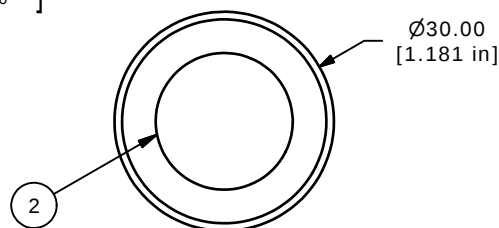
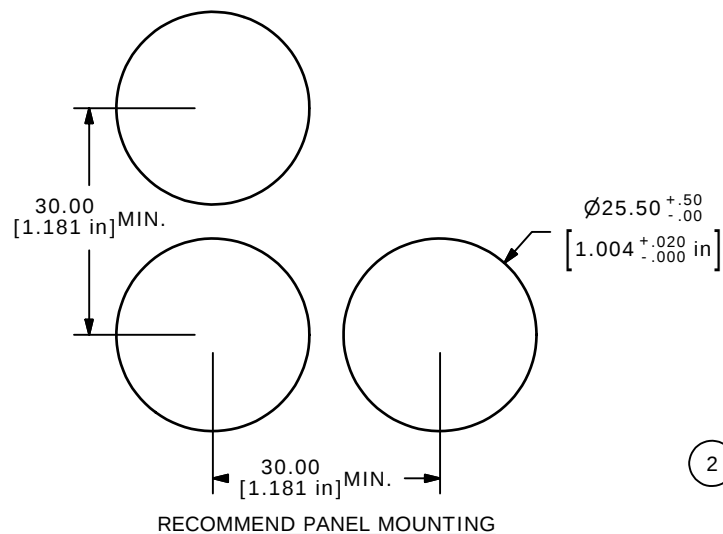


▲ Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F060602	LASEEV110
2	1	F060202	25 MM GRN LENS
3	1	F051705	30MM FLUSH MOUNT RETAINER
4	1	F051704	30MM FLUSH MOUNT BEZEL
5	1	F050419	5000419 LED 12VDC GRN



ISOMETRIC

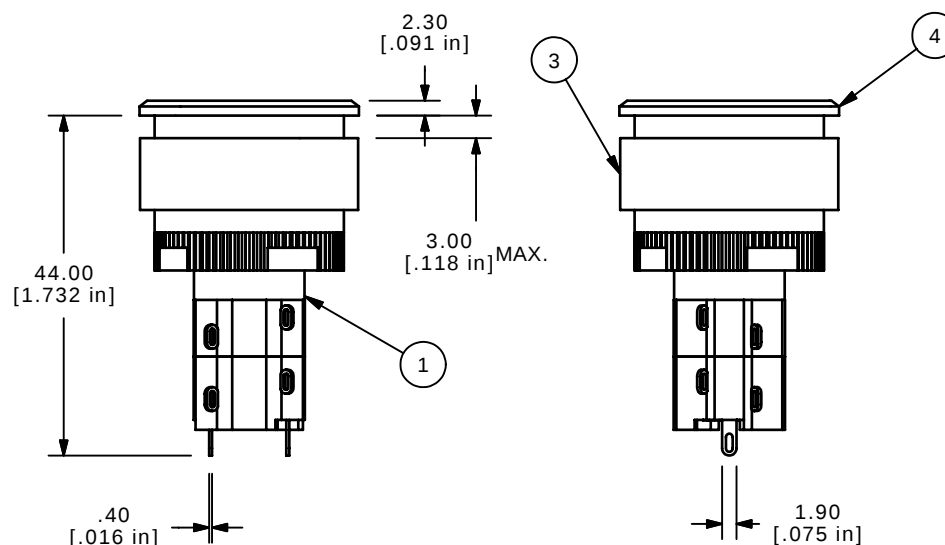

▲ CONTACT CONFIGURATION

- NOTES:
1. ALL DIMENSIONS IN MM [INCH].
 2. GENERAL TOLERANCE: 0.0 ± 0.4
 0.00 ± 0.25
 3. TERM. NOS. FOR REF. ONLY.
 4. RATING: 5A @250VAC
8A @125VAC
.2A @250VDC
6A @24VDC
 5. INSULATION: 1,000 MΩ MIN.
 6. DIELECTRIC STRENGTH: 2000V FOR 1 MIN.
 7. SEALED TO IP65.
 8. TRAVEL: 3.0MM FULL TRAVEL, 2.0MM LATCH
 9. ELECTRICAL LIFE: >50,000 CYCLES
 10. OPERATING TEMP: -25C TO +55C
 11. PANEL THICKNESS: 0.5MM TO 3.0MM
 - ▲12. LAMP VOLTAGE: LED 12VDC GREEN
 13. ▲ DENOTES CRITICAL PARAMETER.
 14. PACKAGE: BOX/10 PCS PER.
 15. 2002/95/EC (ROHS) COMPLIANT



A	17409	RELEASED FOR PRODUCTION	6/27/2007	TN	TITLE	LASEEV32JGRNGRN								
REV	PCR NO	DESCRIPTION	DATE	BY										
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED														
					SCALE	1:1	DATE	6/27/2007	DR	TN	DWG	XF0727P	REV	A