



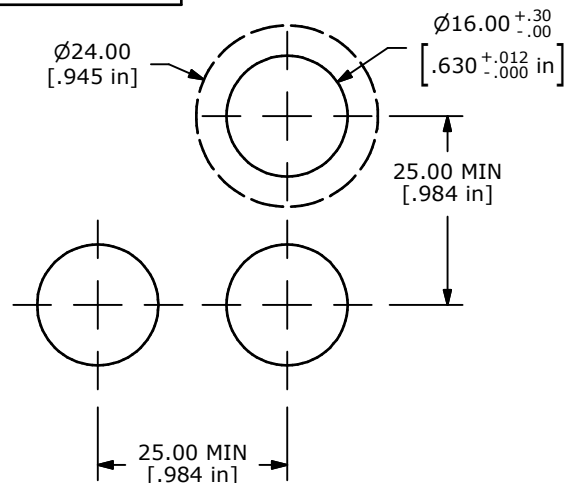




PANEL MOUNTING



jk;lj

NOTE:

- ALL DIMENSIONS IN MM [INCH].
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY.
- RATING: 5A @ 250VAC UL, VDE
8A @ 125VAC UL, VDE
6A @ 24VDC
0.2A @ 250VDC
- ELECTRICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD min.
- INSULATION RESISTANCE: 1,000 MEGA-OHM min.
- OPERATING TEMP.: -25°C to +55°C
- LAMP: 28 V(AC or DC) 40 mA INCANDESCENT
- PANEL THICKNESS = 0.5mm TO 5.0 mm
- ▲ DENOTES CRITICAL PARAMETER.
- PACKAGE: BOX / 20 PIECES PER BOX
- DEGREE OF PROTECTION: IP40
- TRAVEL: 3.00 mm.
- 2002/95/EC (ROHS) COMPLIANT.

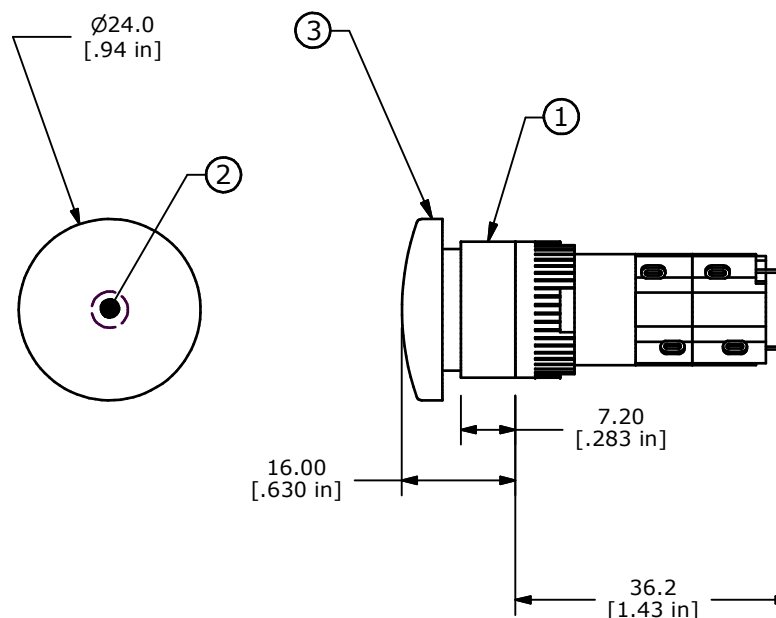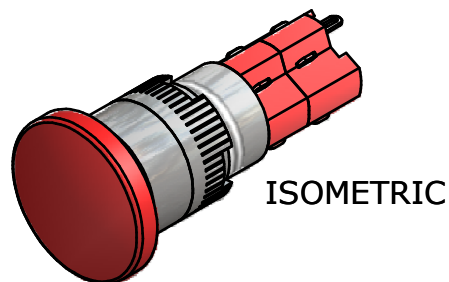

PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F040027	D16OAR12
2	1	F050420	12 VDC RED LED
3	1	F051212	50-012-41 MUSHROOM CAP RED (TRANSPARENT)



TITLE D16OAR2JREDRED

A	18724	RELEASED FOR PRODUCTION	12/10/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
2:1	12/10/2009	BLR	XF0810P	A