
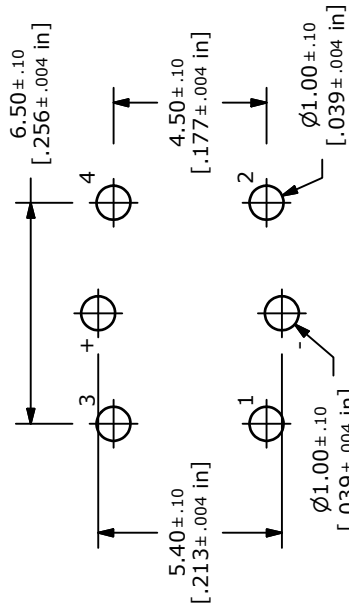
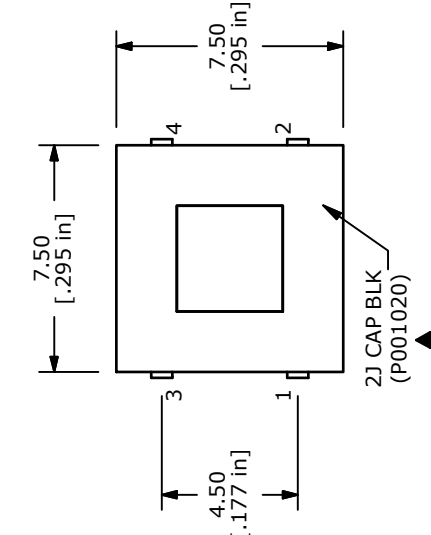
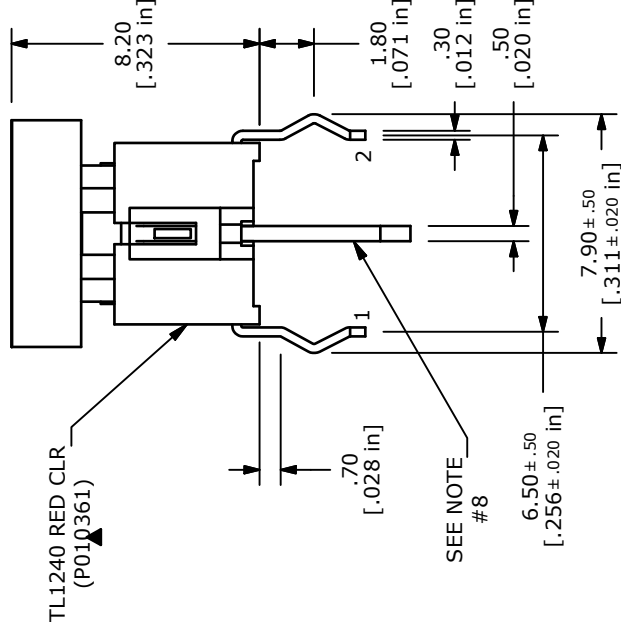
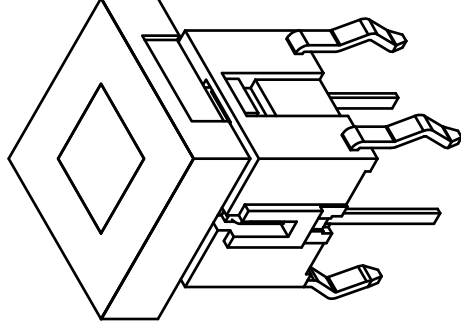





P.C.B. LAYOUT

2J CAP BLK
(P001020)TL1240 RED CLR
(P010361)

CIRCUIT: SPST

NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
- RATING: 50mA @ 12VDC
- TRAVEL: $0.25 \pm 0.2/0.1$ mm
- OPERATING FORCE: 160 ± 50 gf
- CONTACT RESISTANCE: 100 Milli-Ohms Max
- 2002/95/EC (ROHS) COMPLIANT
- SHORTER LEAD (VIOLET COLOR) IS NEGATIVE (CATHODE).
- ▲ DENOTES CRITICAL PARAMETER

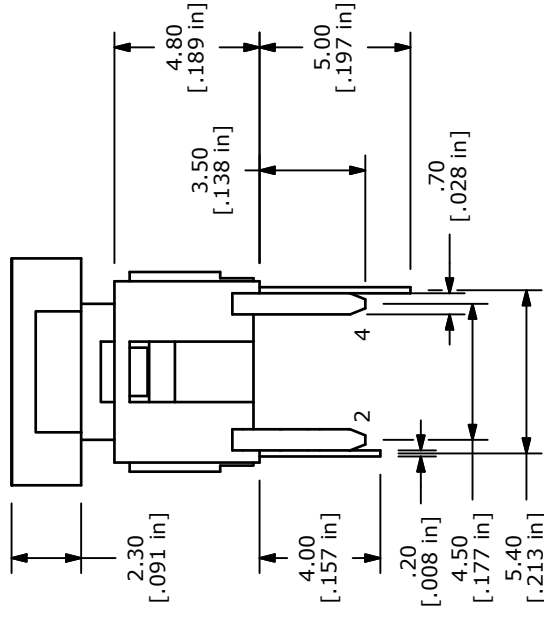

LED SPECS	UNITS	RED
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	1.8-2.5
LUMINOUS INTENSITY	MCD	150



TITLE TL1240RQ2JBLK

D	19550	DRAWING UPDATE / CLEAN-UP	12/28/10	BGL
REV	PCR NO	DESCRIPTION	DATE	BY
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

SCALE 4:1

DATE 12/28/2010

DR BGL

DWG XP0041A

REV D