
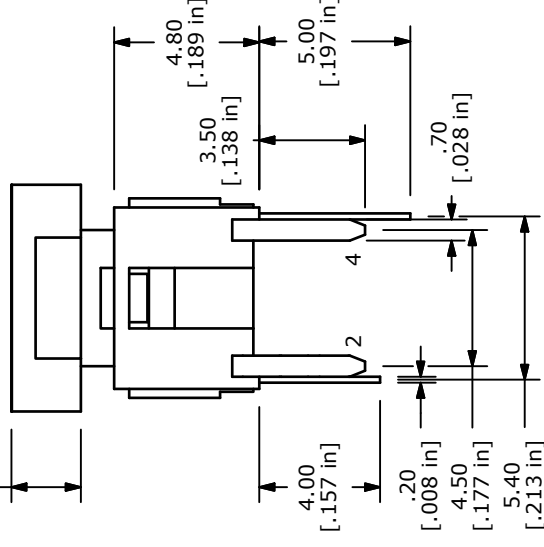
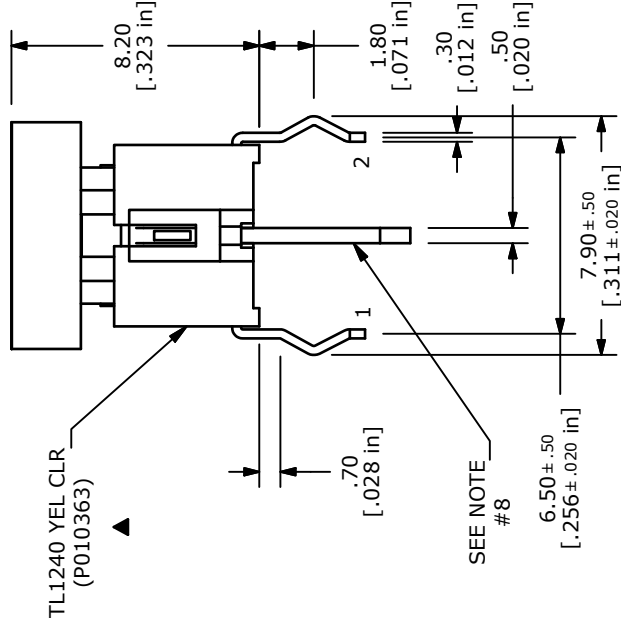
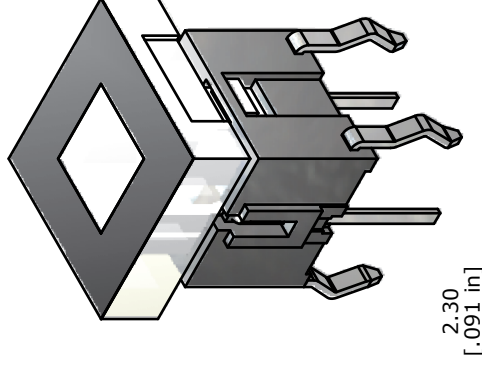
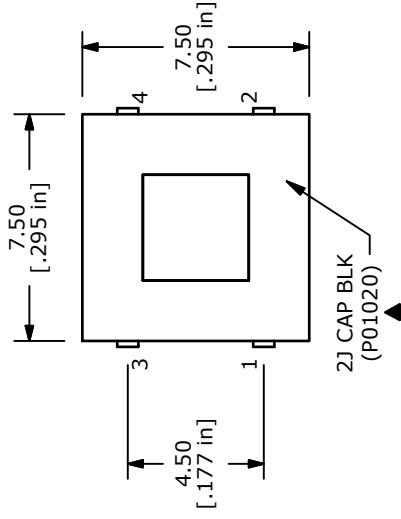


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. RATING: 50mA @ 12VDC
4. TRAVEL: $0.25 \pm 0.2/0.1$ mm
- ▲ 5. OPERATING FORCE: 160 ± 50 gf
6. CONTACT RESISTANCE: 100 Milli-Ohms Max
7. 2002/95/EC (ROHS) COMPLIANT
- ▲ 8. SHORTER LEAD WITH COLOR IS NEGATIVE (CATHODE).
9. ▲ DENOTES CRITICAL PARAMETER

LED SPECS	UNITS	YELLOW
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	2.1-2.6
LUMINOUS INTENSITY	MCD	45

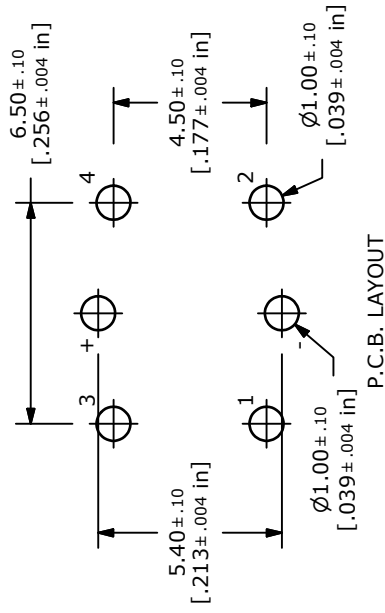

TITLE TL1240YQ2JBLK

D	19550	DRAWING UPDATE / CLEAN-UP	12/28/10	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 4:1

DATE 12/28/2010

DR BGL

DWG

XP0042A

REV D