

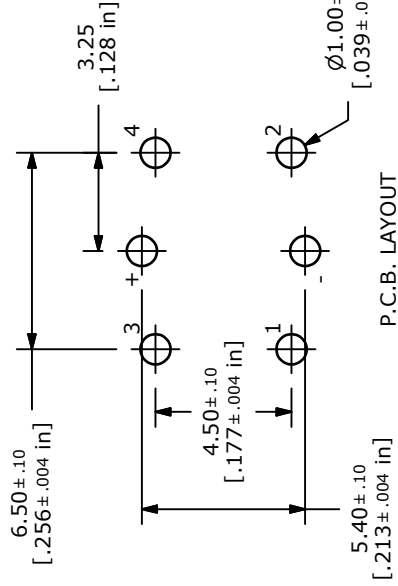



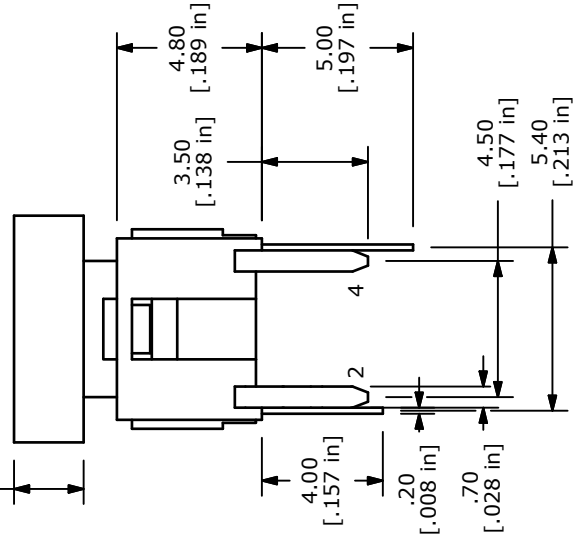

P.C.B. LAYOUT

2.30
[.091 in]

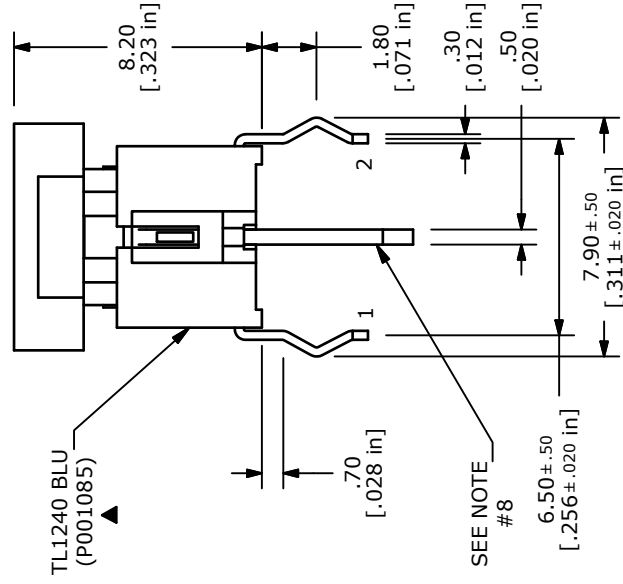

CIRCUIT: SPST

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. RATING: 50mA @ 12VDC
 4. TRAVEL: 0.25 ±0.2/0.1mm
 - ▲ 5. OPERATING FORCE: 160±50gf
 6. CONTACT RESISTANCE: 100 Milli-Ohms Max
 7. 2002/95/EC (ROHS) COMPLIANT
 - ▲ 8. SHORTER LEAD (WITH COLOR) IS NEGATIVE (CATHODE).
 9. ▲ DENOTES CRITICAL PARAMETER

LED SPECS	UNITS	BLUE
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	3.2-4.0
LUMINOUS INTENSITY	MCD	500



E • SWITCH™

B	19550	DRAWING UPDATE / CLEAN-UP	12/28/10	BGL
A	18096	RELEASED FOR PRODUCTION	5/14/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
4:1	5/14/2008	BLR	XP0059A	B