

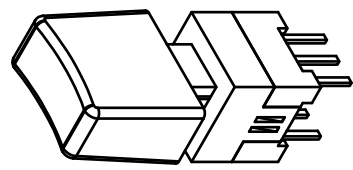



- NOTES:
1. ALL DIMENSIONS IN mm [INCHES]
 2. GENERAL TOLERANCE: $x.x = \pm 0.4$
 $x.xx = \pm .25$
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 0.1A; 30V
 5. CONTACT RESISTANCE: 100 mILLI-OHMS MAX.
 6. TIMING: NON-SHORTING
 7. TRAVEL: FULL 1.8mm
 - ▲ 8. OPERATING FORCE: $140 \pm 50\text{gf}$
 9. ELECTRICAL LIFE: 10,000 CYCLES MAKE AND BREAK
CYCLES AT FULL LOAD
 10. ▲ DENOTE CRITICAL PARAMETER
 11. 2002/95/EC (ROHS) COMPLIANT

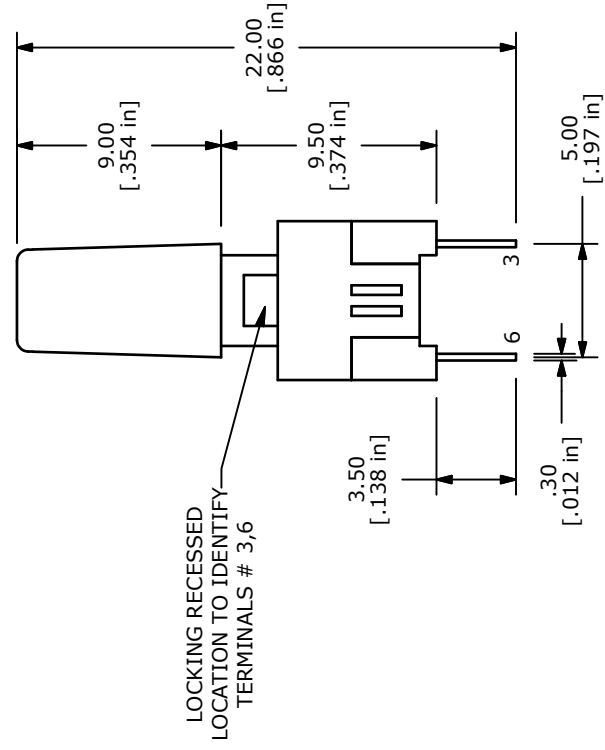

▲ 1C BLACK CAP
(Q800400)

▲ TL2230OAF140
(P010401)

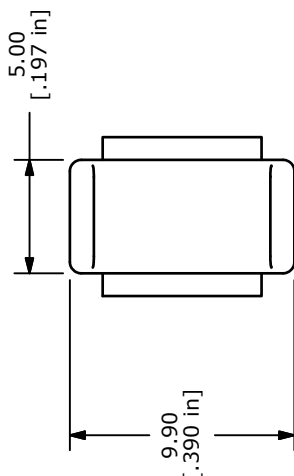

TITLE TL2230OAF1401CBLK

C	19643	FORCE CHANGE TO MATCH P010401	2/2/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

SCALE	3:1	DATE	2/14/2011	DR	BGL	DWG	XP0103A	REV	C
-------	-----	------	-----------	----	-----	-----	---------	-----	---