

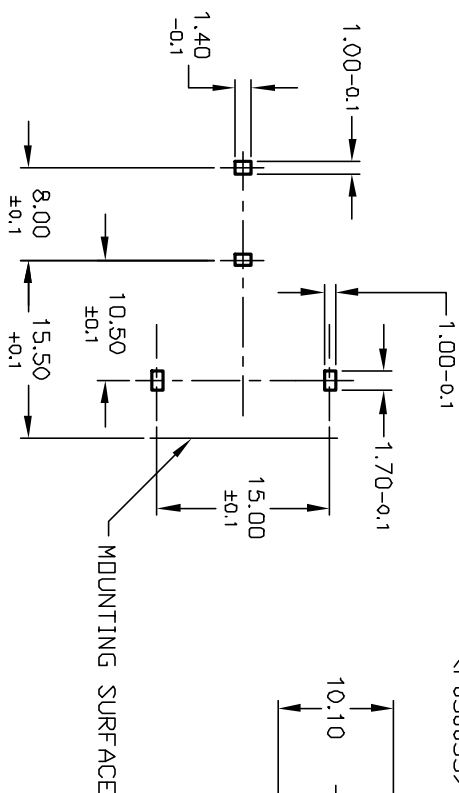


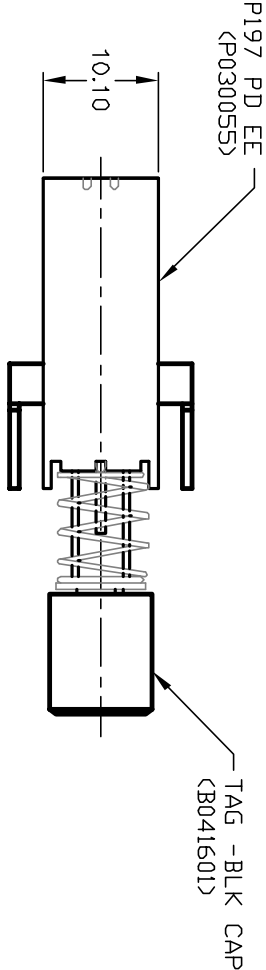


RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NO.'S FOR REF ONLY.
4. RATING: AC 250V 5A/80A, TV-5
5. CONTACT RESISTANCE: 100m Ohms MAX. (AT DC 5V@1A)
6. DIELECTRIC STRENGTH: AC 1000V
7. OPERATING FORCE: 350±100gf
8. TRAVEL: FULL STROKE: 3.5±0.5/-0mm
LOCK STROKE: 2.5±0.5mm

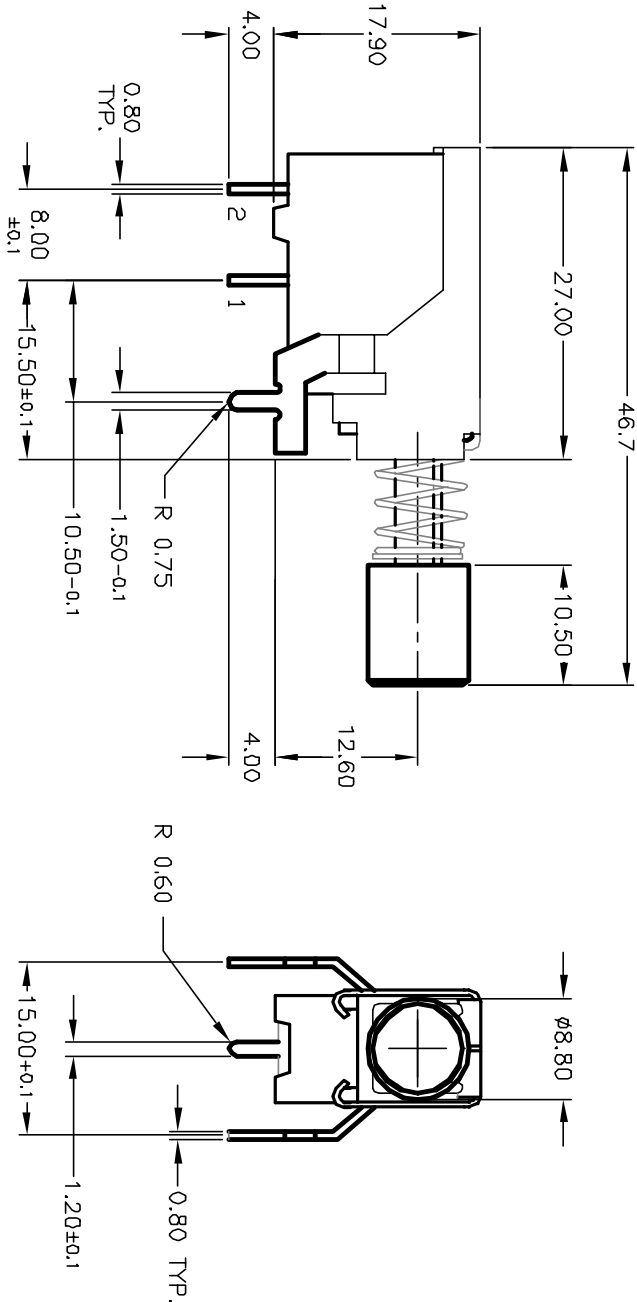

		TITLE		P197 EE PD-TAG/BLK		REV	
A		RELEASED FOR PRODUCTION		10/10/02		CJB	
REV.		ECN No.		DESCRIPTION		DATE	
						CHKD	
						SCALE	
						1.5:1	
						DATE	
						--	
						DR	
						--	
						DWG	
						XP0171A	
						REV	
						A	

E-SWITCH®