
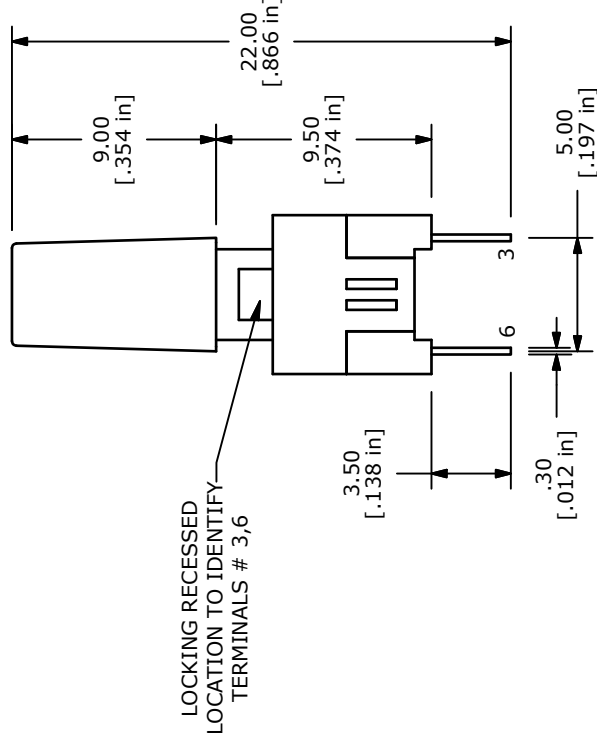



NOTES:

1. ALL DIMENSIONS IN mm [INCHES]
2. GENERAL TOLERANCE: $x.x = \pm 0.4$
 $x.xx = \pm .25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.1A; 30V
5. CONTACT RESISTANCE: 100 mILLI-OHMS MAX.
6. TIMING: NON-SHORTING
7. TRAVEL: FULL 1.8mm
- ▲ 8. OPERATING FORCE: $140 \pm 50\text{gf}$
9. ELECTRICAL LIFE: 10,000 CYCLES MAKE AND BREAK
CYCLES AT FULL LOAD
10. ▲ DENOTE CRITICAL PARAMETER
11. 2002/95/EC (ROHS) COMPLIANT

1D BLACK CAP
(Q800420)TL2230OAF140
(P010401)LOCKING RECESSED
LOCATION TO IDENTIFY
TERMINALS # 3,6

TITLE TL2230OAF1401DBLK

B	19678	CIRCUIT DIAGRAM / DRAWING UPDATED	2/2/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

SCALE	3:1	DATE	2/14/2011	DR	BGL	DWG	XP0239A	REV	B
-------	-----	------	-----------	----	-----	-----	---------	-----	---