



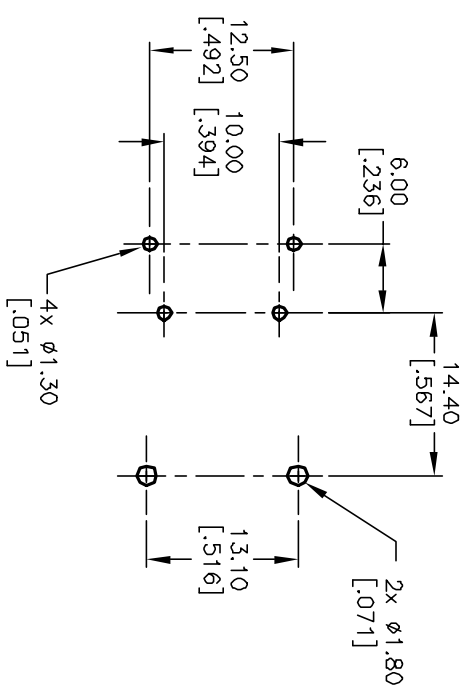


RECOMMENDED P.C.B. LAYOUT

P227EE1CXC
(P030113)

TA12 CHR CAP
(A041675)



CIRCUIT: DPST

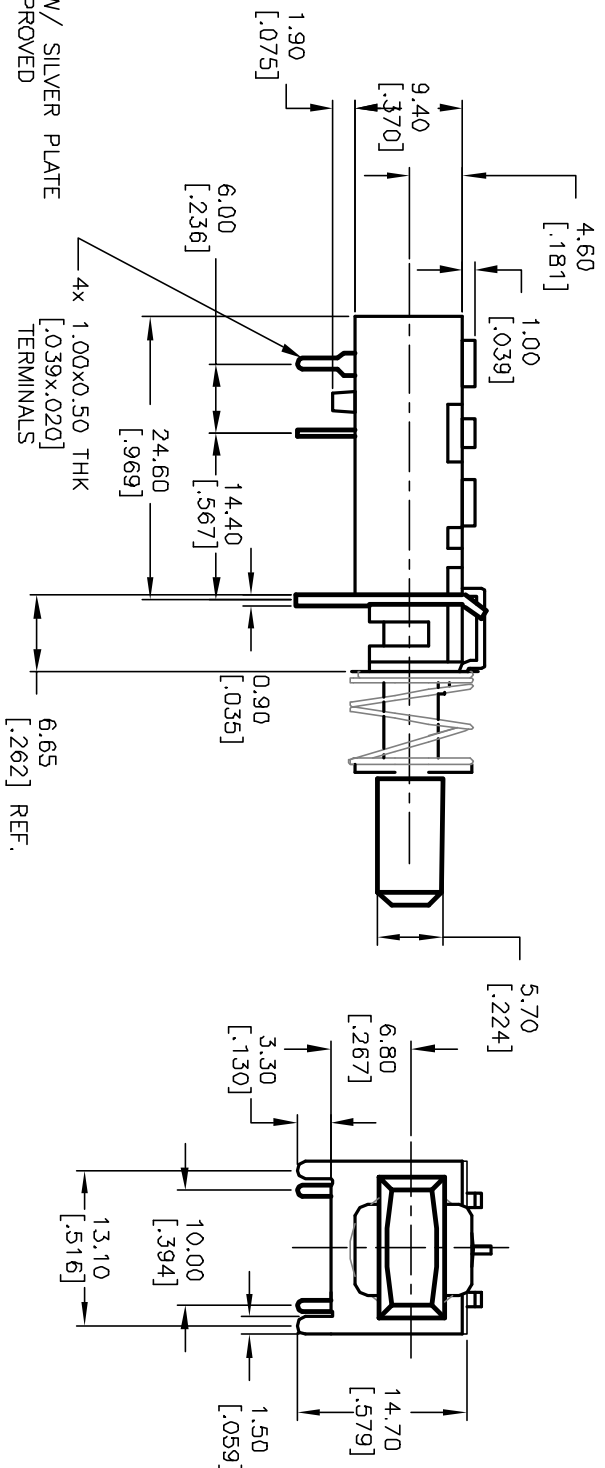

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT MATERIAL: COPPER ALLOY W/ SILVER PLATE
5. RATING: 7A @125V, UL,CUL, VDE APPROVED
4A @250
6. CONTACT RESISTANCE: 20MΩ MAX @ 5V DC 1A
7. DIELECTRIC STRENGTH: AC 1500V RMS
8. OPERATING FORCE: 550±150gf TYP.
9. TRAVEL: FULL:5.6, LOCK:4.0

TITLE				E-SWITCH®			
A	12557	REVISED, AND REDRAWN	11/13/02	CB	P227 EE 1C X C /TA12 CHR		
REV.	ECN No.	DESCRIPTION	DATE	CHKD	CAP MOUNTED HORIZONTAL		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				SCALE	DATE	DR	REV
				1.5:1	11/13/02	CB	A
						XP0245A	