

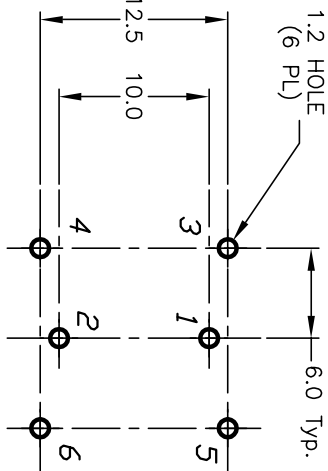





RECOMMENDED P.C.B. LAYOUT
SCALE 2:1

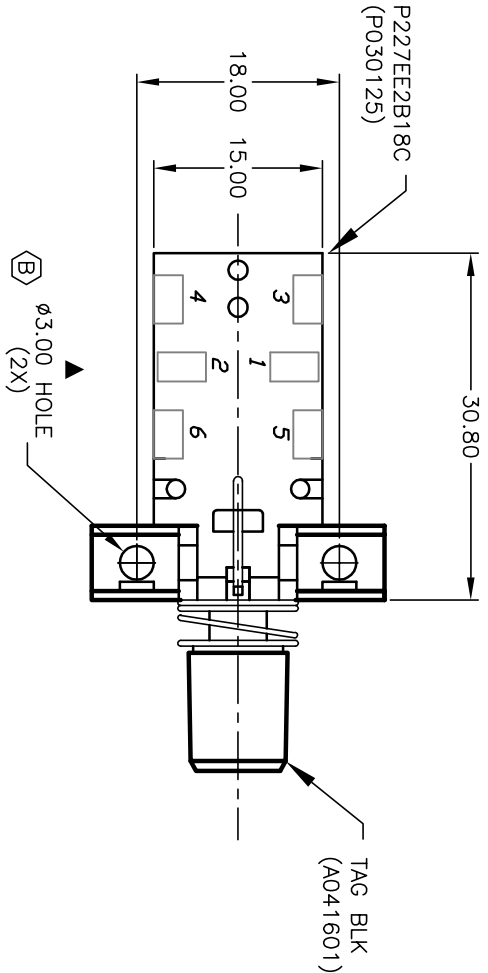

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: AC 125V 7A, UL,CUL,VDE APPROVED
AC 250V 4A, UL,CUL,VDE APPROVED
5. CONTACT MATERIAL: COPPER ALLOY WITH SILVER PLATE.
6. CONTACT RESISTANCE: 20m ohm max. at 5V DC 1A.
7. DIELECTRIC STRENGTH: AC 1500V RMS
8. LIFE EXPECTANCY: Electrical: 6,000 cycle
9. OPERATING FORCE: 550±150gf
10. TRAVEL: Full: 5.5mm, Lock: 4.0mm
11. TERMINALS TO BE EPOXY

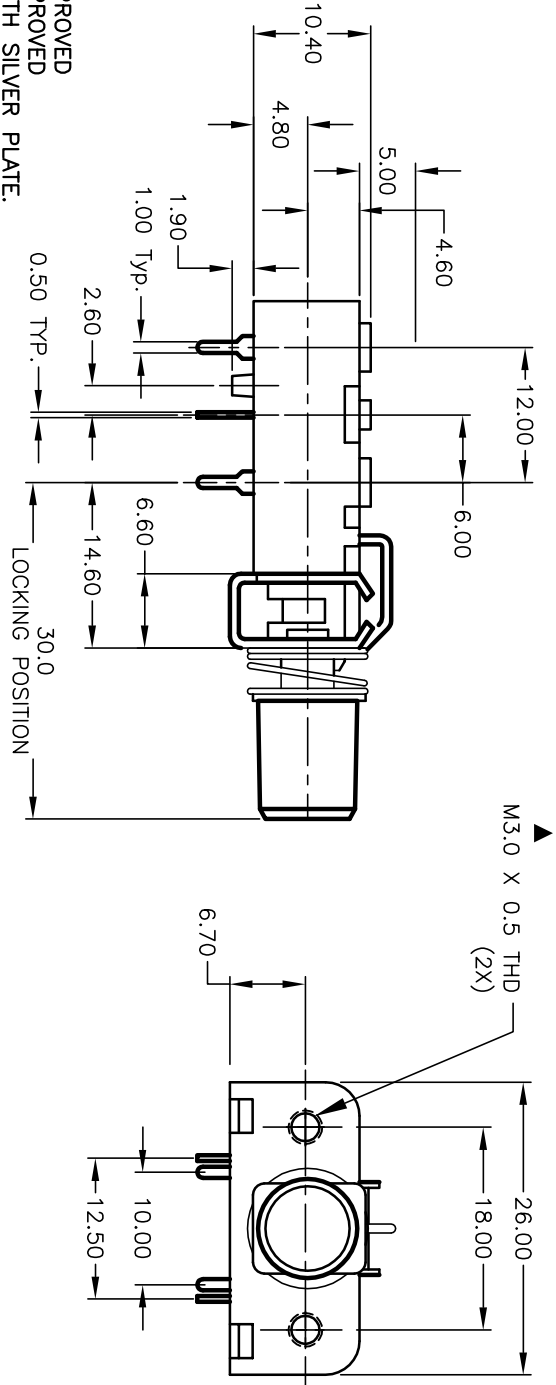

E-SWITCH®			
TITLE		P227 EE 2B 18C /TAG/BLK	
B	13365	8/12/03	AR
A	12886	3/5/03	CB
REV.	ECN No.	DESCRIPTION	DATE
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE		DATE	DR
1.5:1		3/5/03	CB
		DWG	XP0252A
		REV	B