

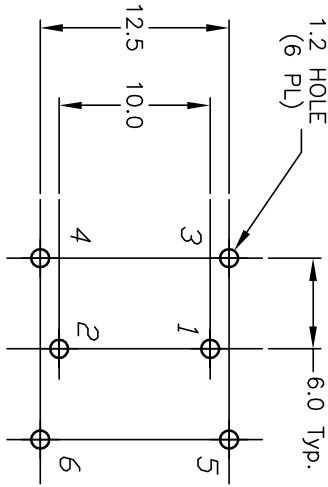





RECOMMEND P.C.B. LAYOUT
SCALE 2:1

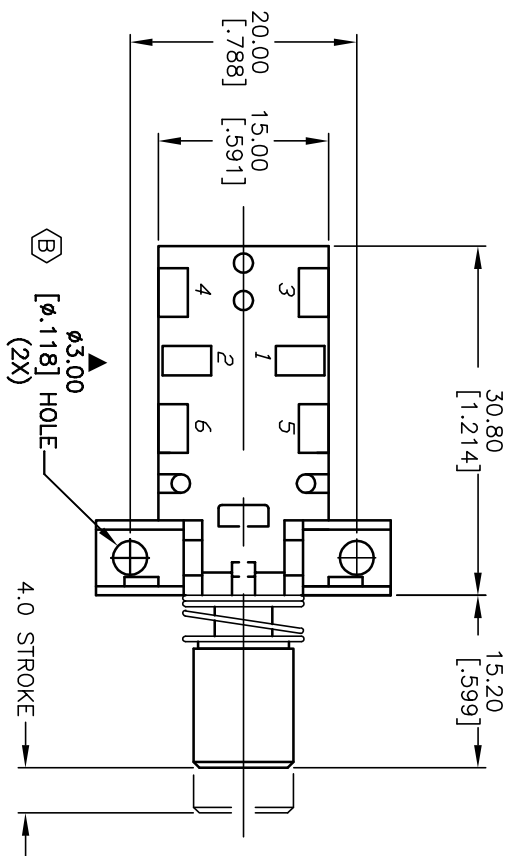

CIRCUIT: DPDT
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: AC 125V 7A, UL,CUL,VDE APPROVED
AC 250V 4A, UL,CUL,VDE APPROVED
5. CONTACT MATERIAL: COPPER ALLOY WITH SILVER PLATE.
6. CONTACT RESISTANCE: 20m ohm max. at 5V DC 1A.
7. DIELECTRIC STRENGTH: AC 1500V RMS
8. LIFE EXPECTANCY: Electrical: 6,000 cycle
9. OPERATING FORCE: 550±150gf
10. TRAVEL: Full: 5.5mm, Lock: 4.0mm
- ▲ 11. TERMINALS TO BE EPOXY
12. ▲ DENOTES CRITICAL PARAMETER.

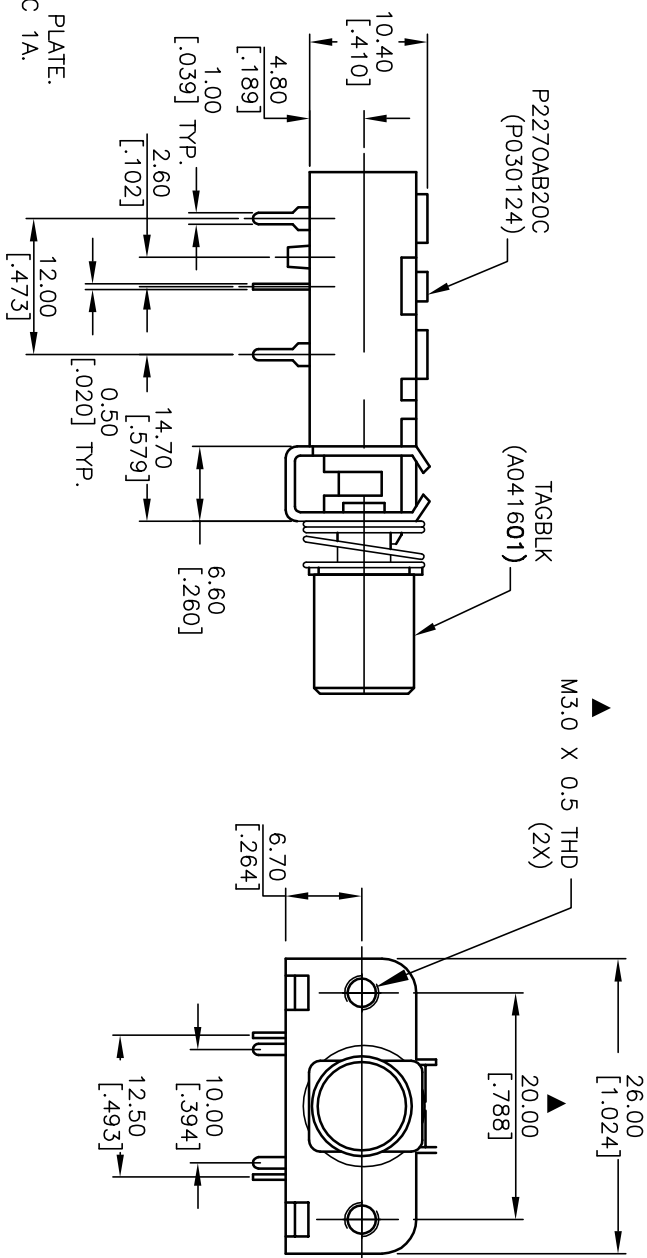

B			13365	Ø3.00 HOLE WAS TAPPED	8/12/03	AR
A			13084	RELEASED FOR PRODUCTION	4/24/03	AR
REV.			ECN No.	DESCRIPTION	DATE	CHKD
			THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
			TITLE			
			P2270A2B20CTAGBLK			
			SCALE			
			1.5:1			
			DATE			
			4/24/03			
			DR			
			AR			
			DWG			
			XP0256A			
			REV			
			B			