

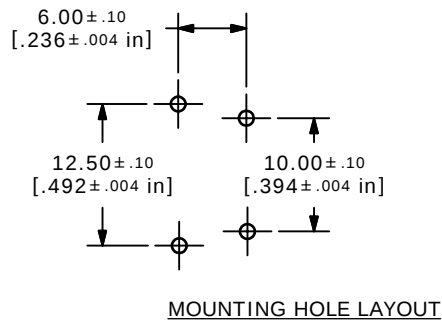

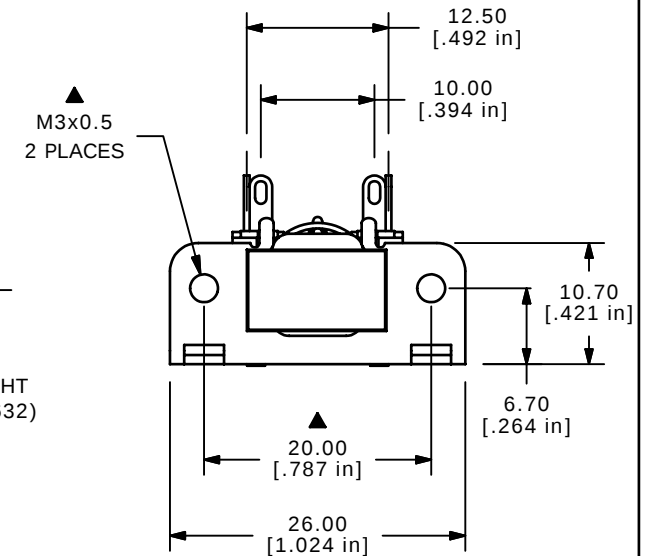


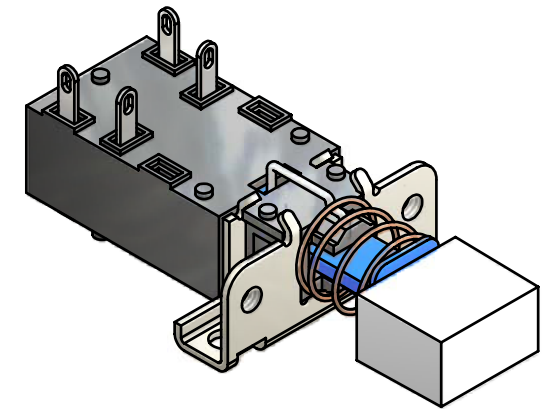

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 7A@125V, 4A@250 UL, CUL, & VDE APPROVED
- ▲5. CONTACT MATERIAL:
TERMINALS, COPPER ALLOY SILVER PLATE.
CONTACTS, COPPER ALLOY W/TIN OXIDE
6. CONTACT RESISTANCE: 100MILLI-OHMS TYP. MAX INITIAL
7. DIELECTRIC STRENGTH: 1000V for 1min
8. ELECTRICAL LIFE: 6,000 CYCLES
9. OPERATING FORCE: 550±150gf TYP.
10. TRAVEL: FULL: 4.0, LOCK: 2.5
11. ▲DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT

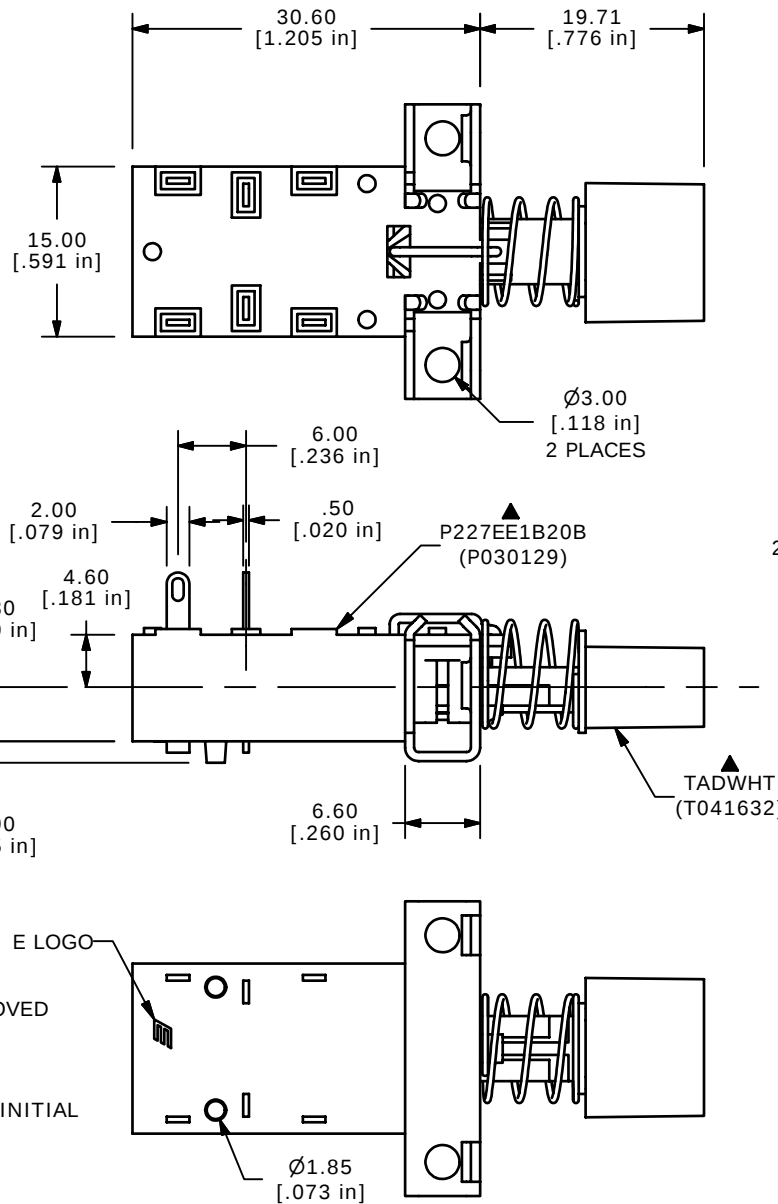

B	17455	FIXED TITLE TO READ WHT	7/11/07	TN
A	17444	RELEASED FOR PRODUCTION	7/9/07	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE P227EE1B20BTADWHT

SCALE 1.5

DATE 7/11/2007

DR TN

DWG XP0301A

REV B