

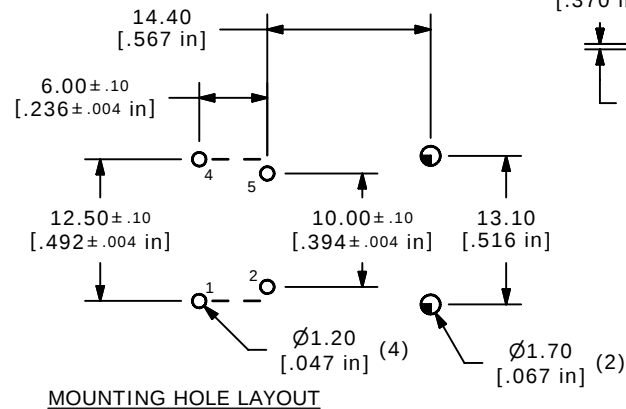



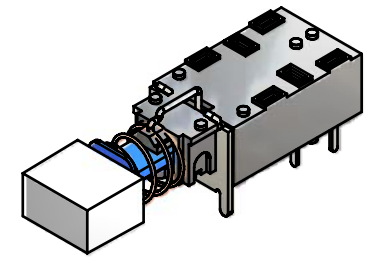


NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X= `0.4
X.XX= `0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. CONTACT MATERIAL:
TERMINALS: COPPER ALLOY W/ SILVER PLATE
CONTACTS: COPPER ALLOY W/ TIN OXIDE
5. RATING: 7A@125V, 4A@250V
6. CONTACT RESISTANCE: 100 MILLI-OHMS MAX
7. DIELECTRIC STRENGTH: AC 1500V RMS
8. ELECTRICAL LIFE: 6,000 CYCLES
9. OPERATING FORCE: 550 ± 150gf TYP.
10. TRAVEL: FULL: 5.5 ± 0.2mm, LOCK: 4.0 ± 0.2mm
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT

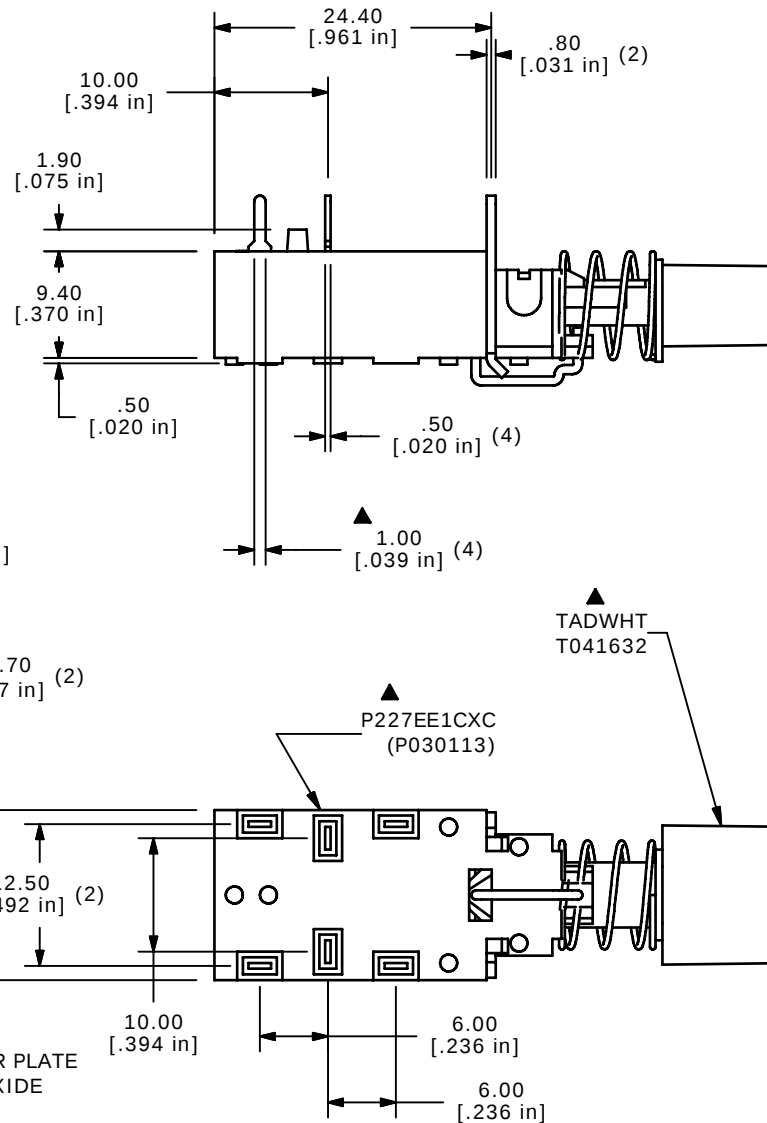

ISOMETRIC

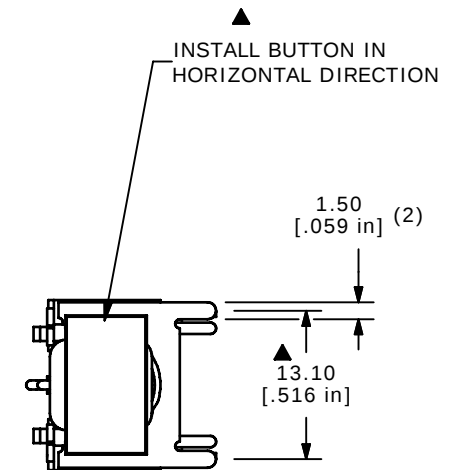

A	19078	Release For Production	5/19/10	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

 E-SWITCH® 				
TITLE P227EE1CXCTADWHT				
SCALE	DATE	DR	DWG	REV
1.5 : 1	5/19/2010	rc	XP0313A	A