


▲ SWITCH FUNCTION

POS. 1	POS. 2
	
OFF	(ON)
OPEN	1-3



(ON) = MOMENTARY



CIRCUIT: SPST

NOTE:



1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: GOLD
5. RATING: 0.4VA MAX. @ 20V MAX. (AC or DC)
6. ELECTRIC LIFE: 60,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT
- ▲ 12. HARDWARE TO SHIP BULK:
T200000 LOCK WASHER, QTY 1
T200002 LOCK RING, QTY 1
T200001 HEX NUT, QTY 2

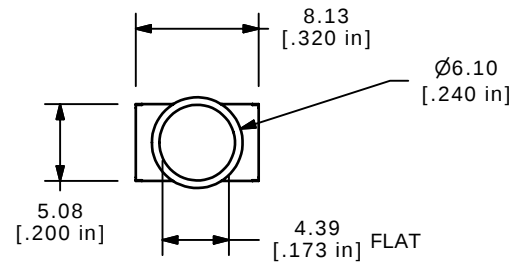

ISOMETRIC

▲ 800SP9B5M1RE
(T811000)

E-LOGO ON
OPPOSITE SIDE

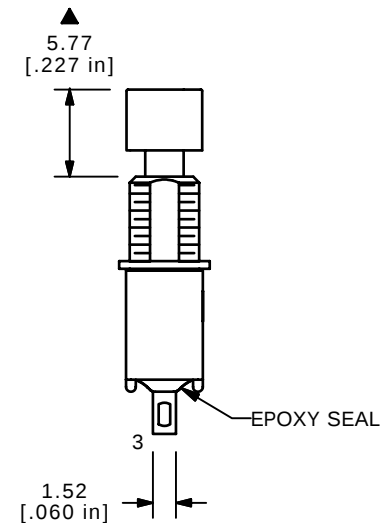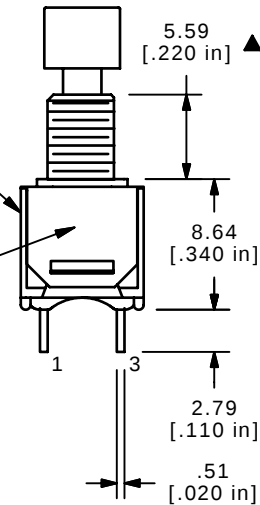**E-SWITCH®**

TITLE 800SP9B5M1REHC1RED

A	16003	NEW PART RELEASE	5/15/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 2:1	DATE 5/15/2006	DR CT	DWG XT0134P	REV A
--------------	-------------------	----------	----------------	----------