



SWITCH FUNCTION	
POS. 1	POS. 2
	
ON	(ON)
1-3, 4-6	1-2, 4-5




() = MOMENTARY



CIRCUIT: DPST

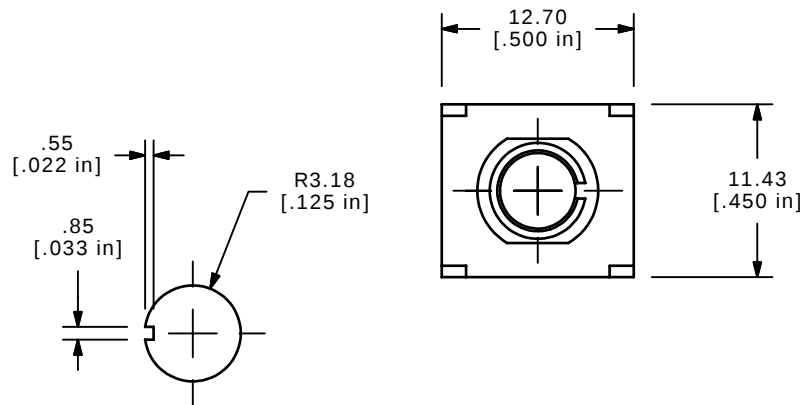

PANEL MOUNTING

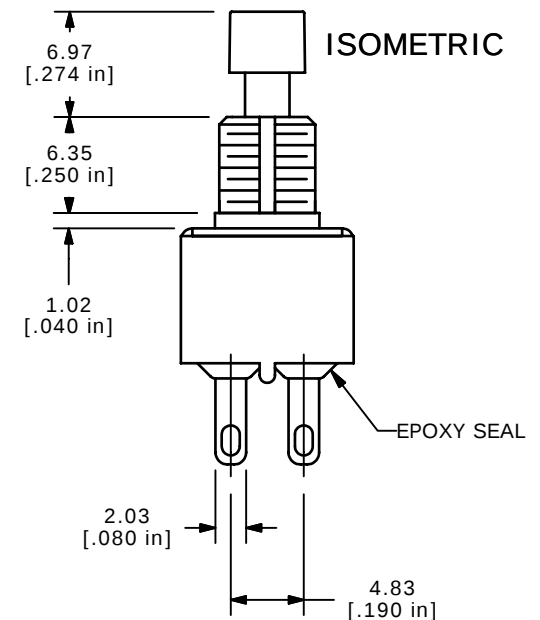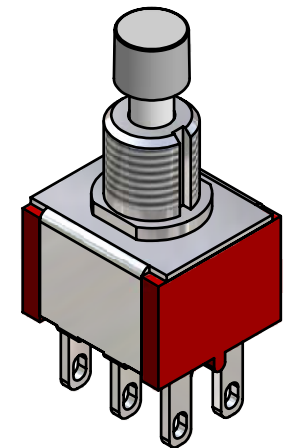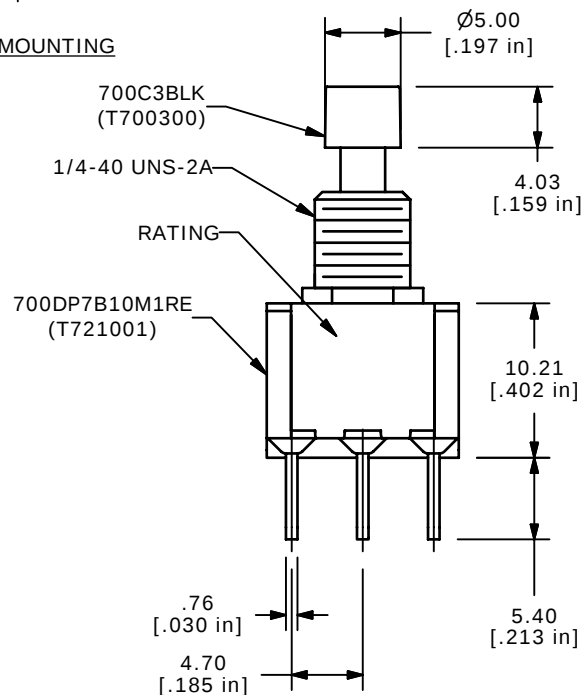

NOTES:

1. ALL DIMENSIONS IN MM [INCH]

2. GENERAL TOLERANCE: $x.x \pm 0.4$ $x.xx \pm 0.25$

3. TERMINAL NUMBERS FOR REFERENCE ONLY

▲ 4. PLATING MATERIAL: GOLD

5. RATING: 0.4VA MAX. @ 20VAC or DC MAX.

6. ELECTRIC LIFE: 50,000 make-and-break cycles at full load

7. INSULATED RESISTANCE: 1,000MOHM MIN.

8. DIELECTRIC STRENGTH: 1,000V RMS @ sea level

9. OPERATING TEMPERATURE: -30°C to 85°C

10. ▲ DENOTES CRITICAL PARAMETER

11. 2002/95/EC (ROHS) COMPLIANT

E-SWITCH®

TITLE 700DP7B10M1REC3BLK

A	16041	NEW PART RELEASE	5/19/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
2:1	5/19/2006	CT	XT0135P	A