



* Pb Free Part



MSL1

Customer Name	Standard Specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM900/GSM850 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G5KC-942M50-Y4YW	Version 1.1bc	

Table 1.Electrical specifications(Filter 1)

Pass Band (925-960MHz)						
Item	Condition (MHz)	Specification			Unit	Remark
		Min.	Typ.	Max.		
Insertion Loss	925-960	-	1.8	2.4	dB (*)	
Ripple	925-960	-	0.7	1.4	dB	
Input VSWR	925-960	-	1.8	2.2	-	
Output VSWR	925-960	-	1.8	2.2	-	
Absolute attenuation	DC-880	40	60	-	dB	
	880-905	28	40	-	dB	
	905-915	20	31	-	dB	
	980-1025	25	34	-	dB	
	1025-2880	36	51	-	dB	
	2880-6000	30	43	-	dB	
Amplitude balance (S ₂₁ /S ₃₁)	925-960	-1.0	-0.2/+0.2	+1.0	dB	
Phase balance ((∠S ₂₁ -∠S ₃₁)+180)	925-960	-10	-1/+4	+10	deg	
Input impedance (Unbalanced)		50			Ohm	
Output impedance (Balanced)		150//82nH			Ohm	
Operating temperature		-30to +85			°C	

(*) These data include loss that comes from the test board.



MSL1

* Pb Free Part

Customer Name	Standard Specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM900/GSM850 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G5KC-942M50-Y4YW	Version 1.1bc	

Table 2.Electrical specifications(Filter 2)

Pass Band (869-894MHz)						
Item	Condition (MHz)	Specification			Unit	Remark
		Min.	Typ.	Max.		
Insertion Loss	869-894	-	1.4	2.1	dB (*1)	
Ripple	869-894	-	0.3	1.1	dB	
Input VSWR	869-894	-	1.5	2.0	-	
Output VSWR	869-894	-	1.5	2.0	-	
Absolute attenuation	DC-824	45	62	-	dB	
	824-849	40	54	-	dB	
	914-960	25	35	-	dB	
	960-2000	35	53	-	dB	
	2000-6000	30	43	-	dB	
Amplitude balance (S ₂₁ /S ₃₁)	869-894	-1.0	-0.0/+0.2	+1.0	dB	
Phase balance (($\angle S_{21} - \angle S_{31}$)+180)	869-894	-10	0/+2	+10	deg	
Input impedance (Unbalanced)		50			Ohm	
Output impedance (Balanced)		150			Ohm	
Operating temperature		-30to +85			°C	

(*1) These data include loss that comes from the test board.




MSL1

* Pb Free Part

Customer Name	Standard Specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM900/GSM850 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G5KC-942M50-Y4YW	Version 1.1bc	

Dimensions

Device size: 1.8typ. x 1.4typ. x 0.5max.

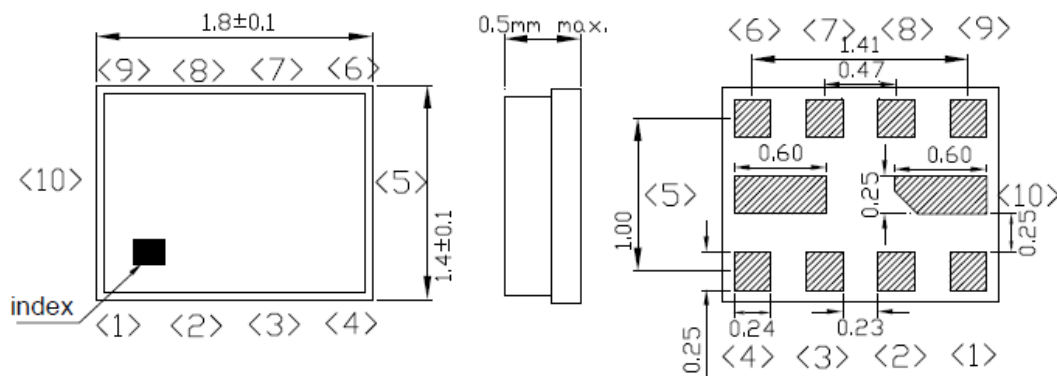


Unit : mm

Pin Configuration

Pin No.	Pin name	Description
1	IN	Filter1 input pin
2	GND	Ground
3	GND	Ground
4	IN	Filter2 input pin
5	GND	Ground
6	OUT	Filter2 balanced output pin
7	OUT	Filter2 balanced output pin
8	OUT	Filter1 balanced output pin
9	OUT	Filter1 balanced output pin
10	GND	Ground

Filter No.	Passband(MHz)	System
1	925 ~ 960	GSM900-Rx
2	869 ~ 894	GSM850-Rx

Evaluation Circuit

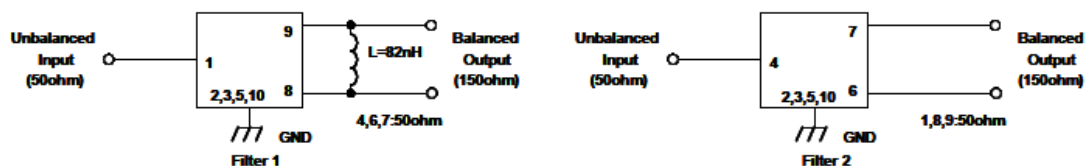
TAIYO YUDEN



MSL1

* Pb Free Part

Customer Name	Standard Specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM900/GSM850 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G5KC-942M50-Y4YW	Version 1.1bc	

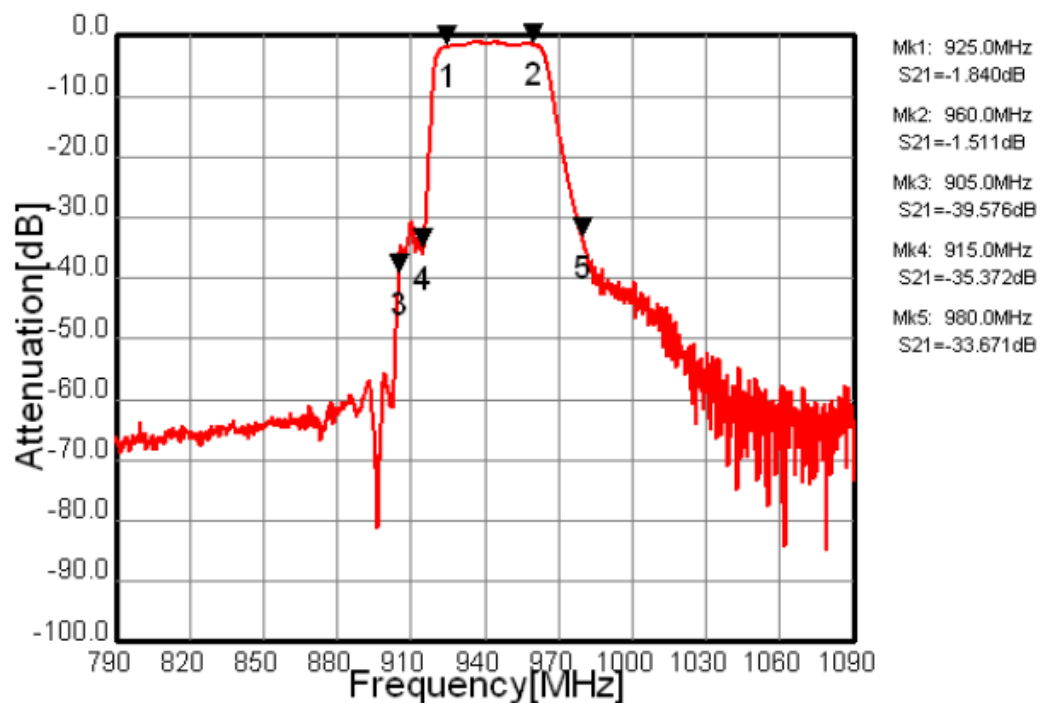


Fig.1 Pass-band Characteristic (Filter1)

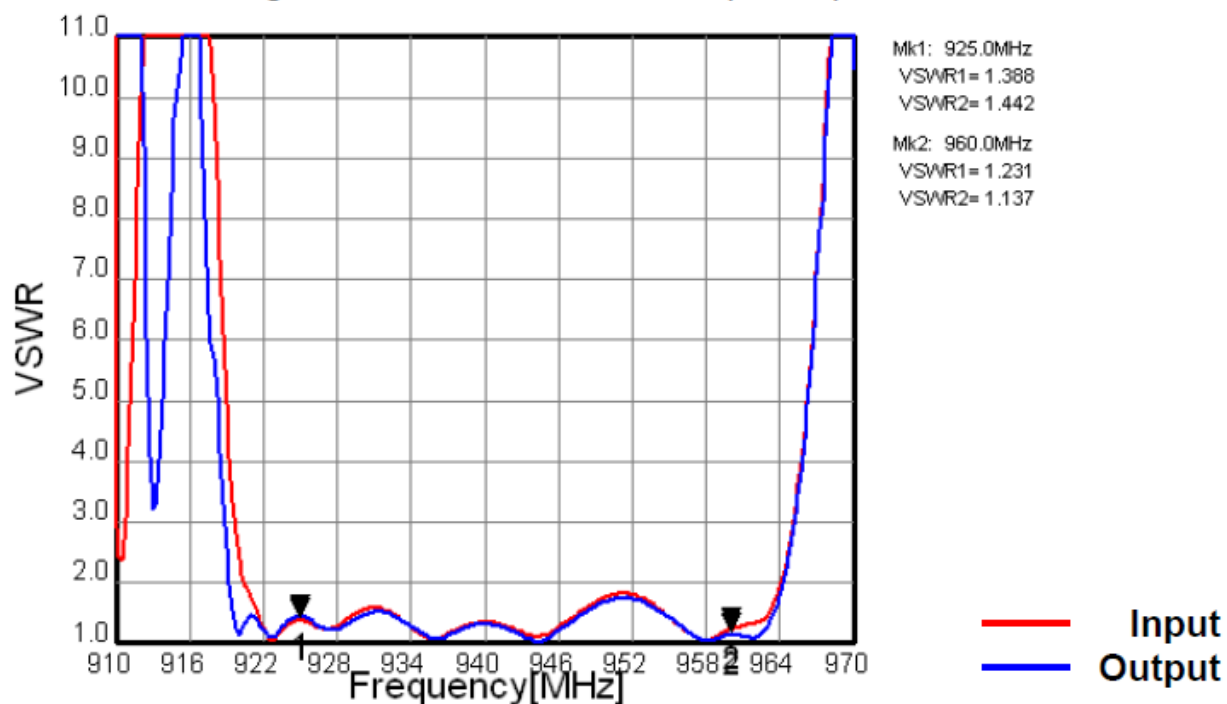


Fig.2 VSWR (Filter1)

TAIYO YUDEN



MSL1

* Pb Free Part

Customer Name	Standard Specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM900/GSM850 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G5KC-942M50-Y4YW	Version 1.1bc	

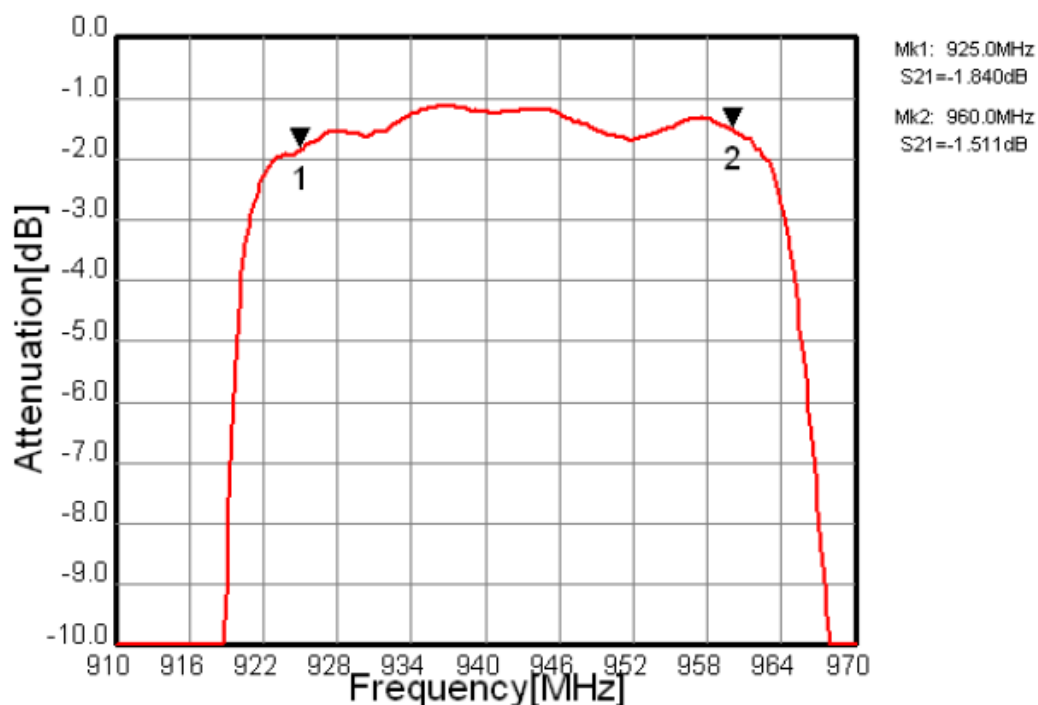


Fig.3 In-band Characteristic (Filter1)

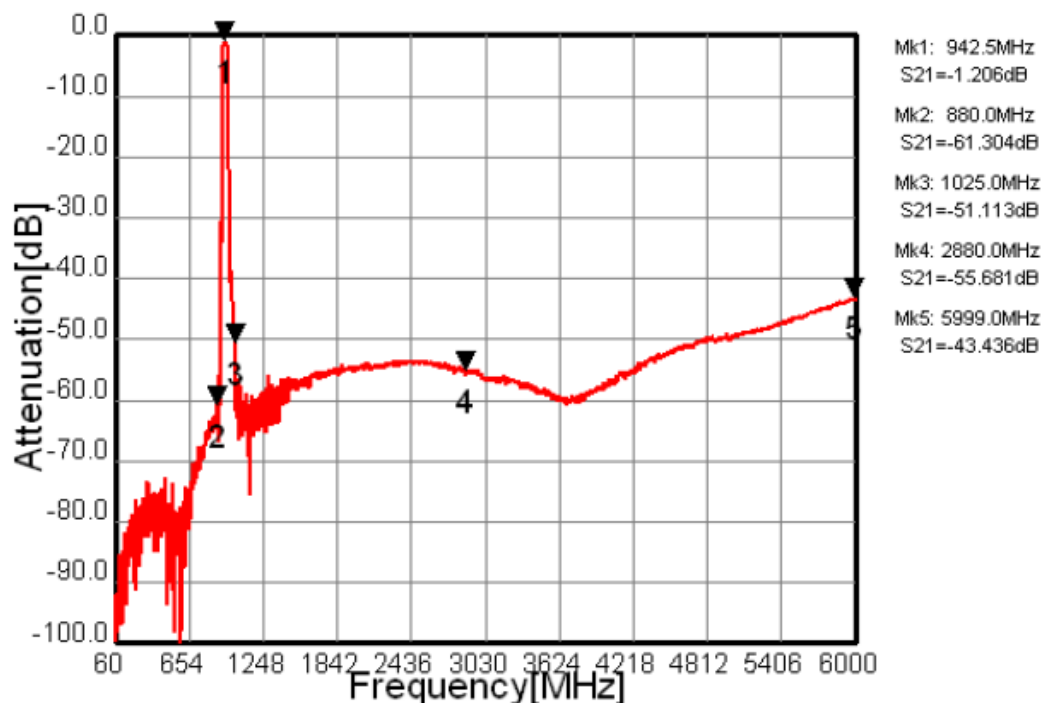


Fig.4 Wide-band Characteristic (Filter1)



* Pb Free Part



MSL1

Customer Name	Standard Specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM900/GSM850 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G5KC-942M50-Y4YW	Version 1.1bc	

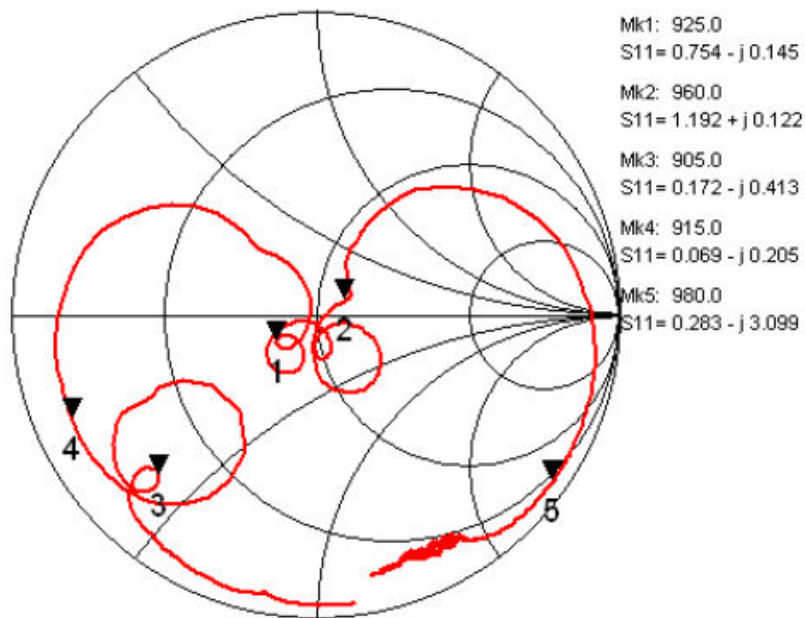


Fig.5 Impedance (S11) (Filter1)

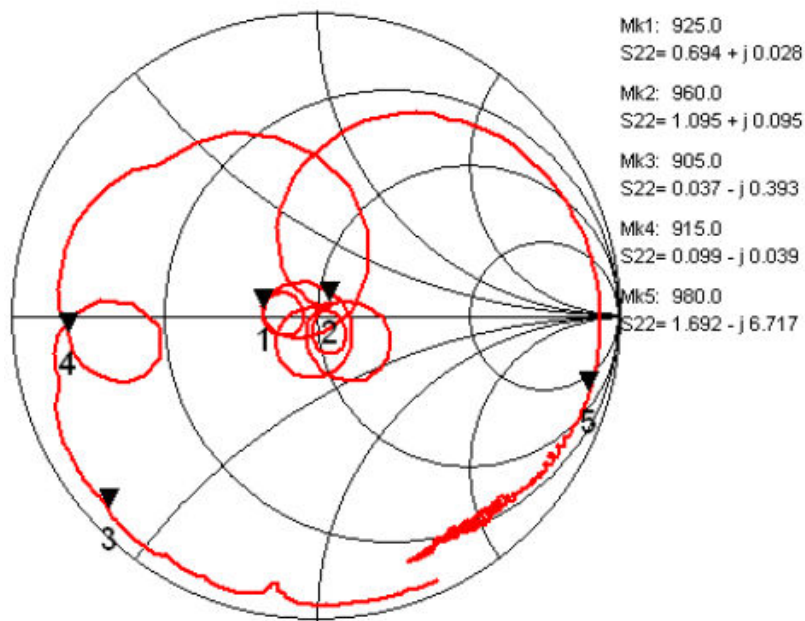


Fig.6 Impedance (S22) (Filter1)



MSL1

* Pb Free Part

Customer Name	Standard Specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM900/GSM850 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G5KC-942M50-Y4YW	Version 1.1bc	

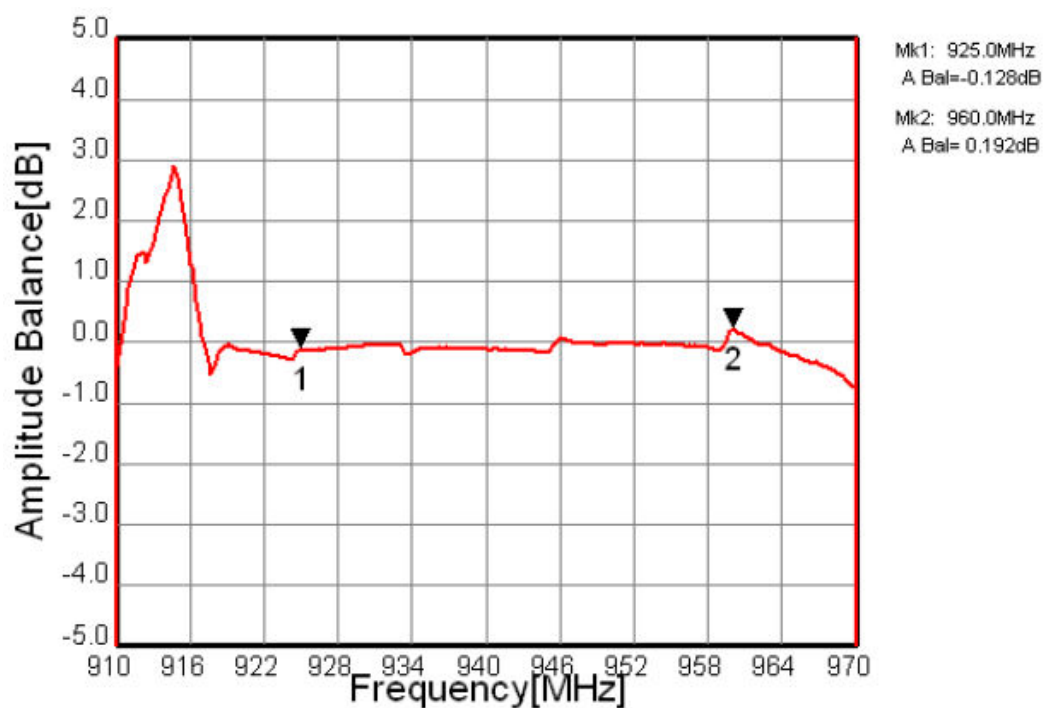


Fig.7 Amplitude Balance (Filter1)

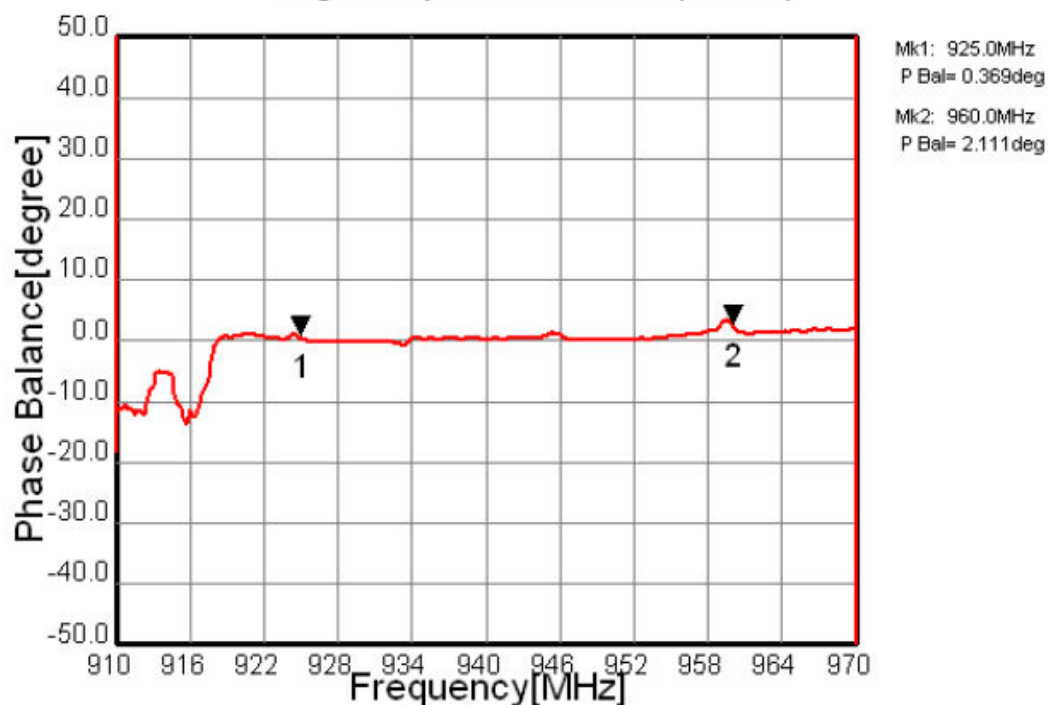


Fig.8 Phase Balance (Filter1)

TAIYO YUDEN



MSL1

* Pb Free Part

Customer Name	Standard Specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM900/GSM850 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G5KC-942M50-Y4YW	Version 1.1bc	

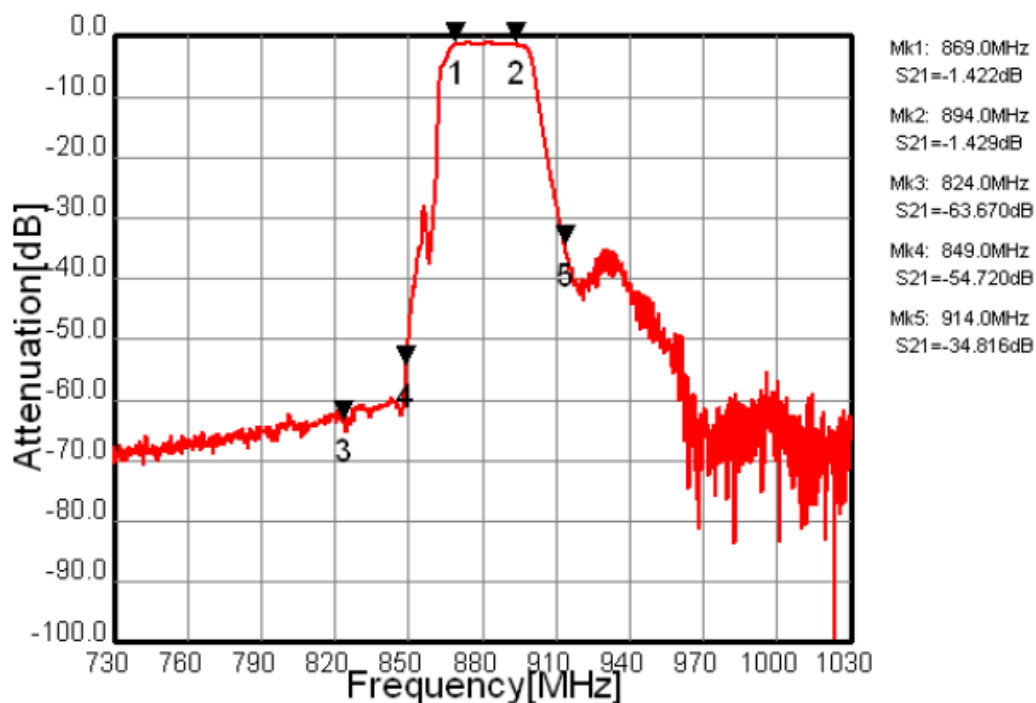


Fig.9 Pass-band Characteristic (Filter2)

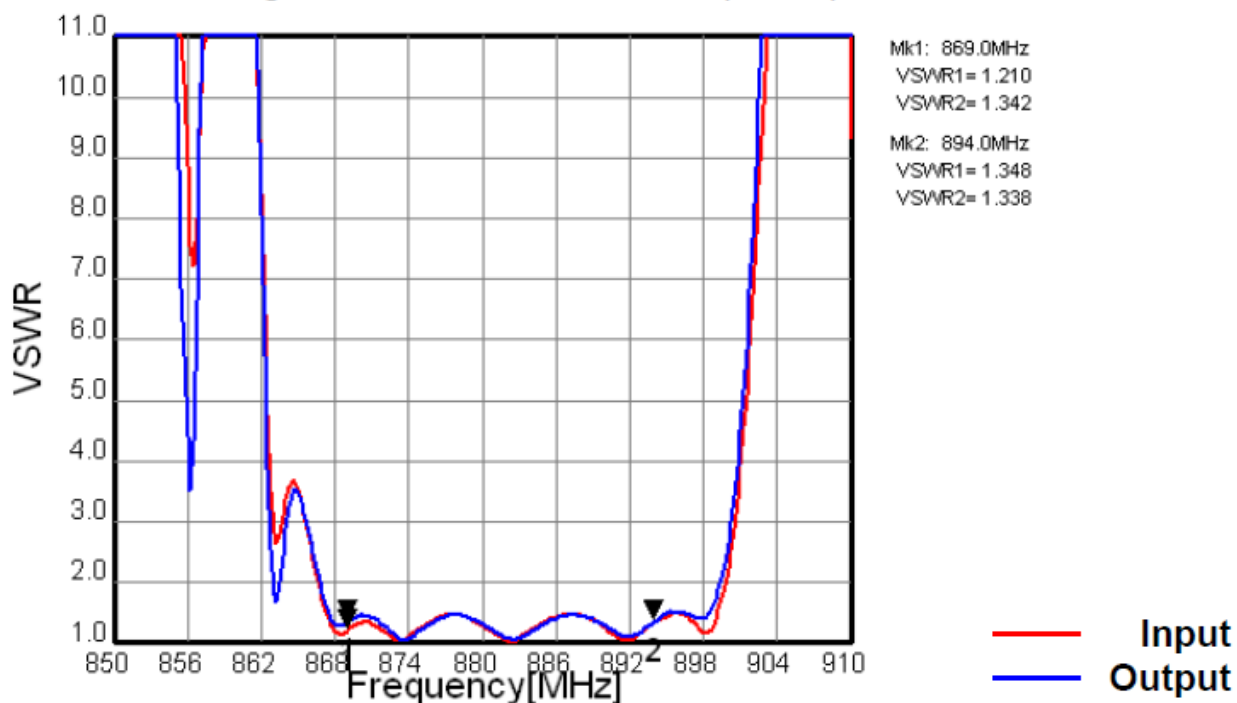


Fig.10 VSWR (Filter2)

TAIYO YUDEN



MSL1

* Pb Free Part

Customer Name	Standard Specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM900/GSM850 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G5KC-942M50-Y4YW	Version 1.1bc	

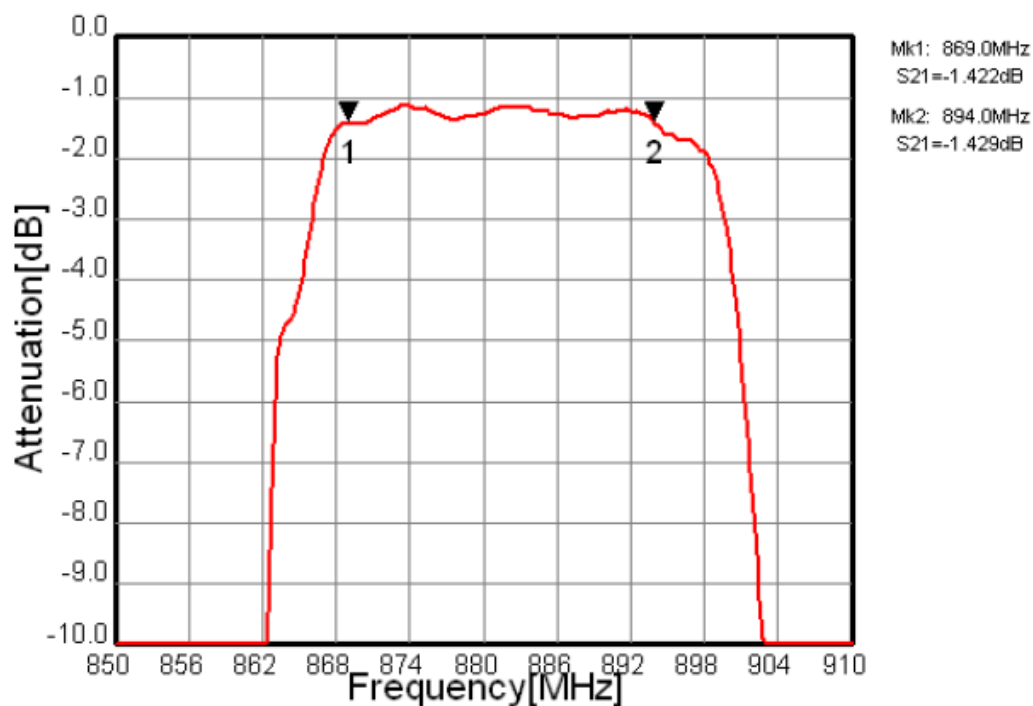


Fig.11 In-band Characteristic (Filter2)

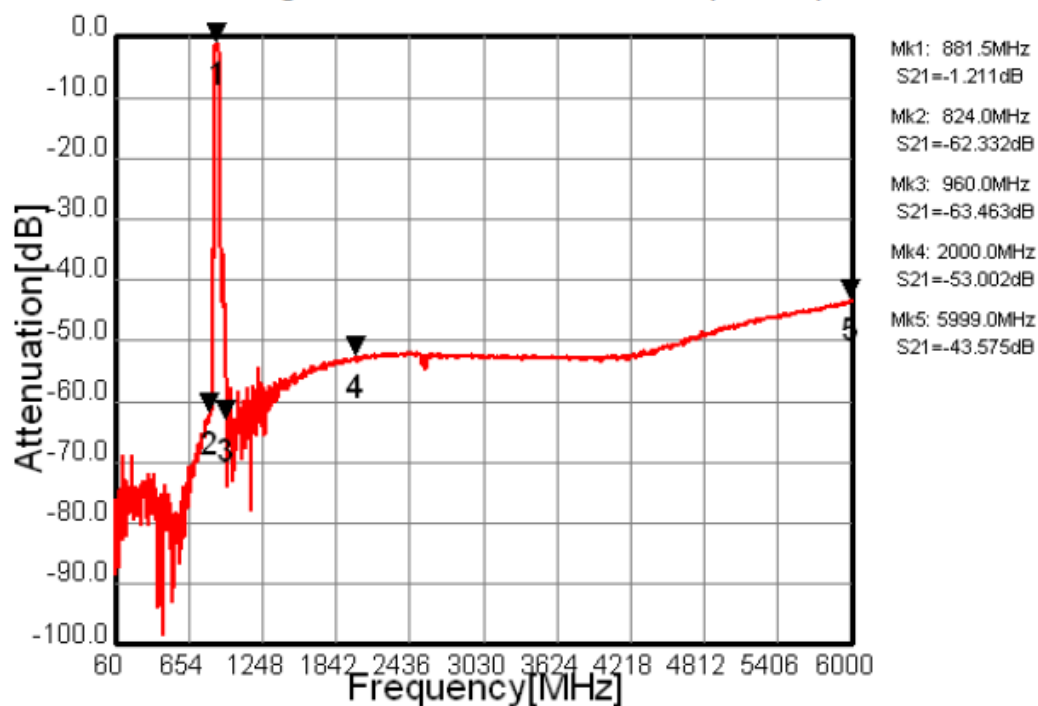


Fig.12 Wide-band Characteristic (Filter2)

TAIYO YUDEN



* Pb Free Part



MSL1

Customer Name	Standard Specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM900/GSM850 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G5KC-942M50-Y4YW	Version 1.1bc	

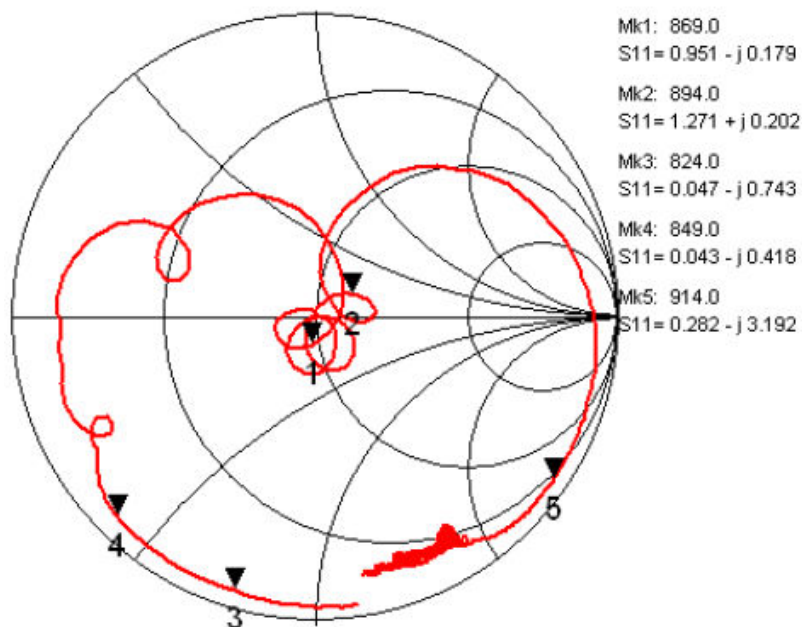


Fig.13 Impedance (S11) (Filter2)

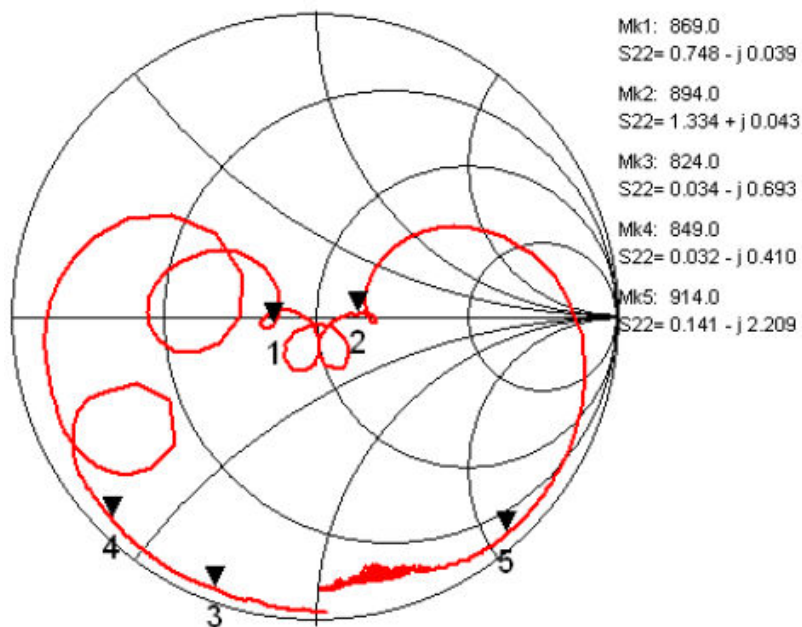


Fig.14 Impedance (S22) (Filter2)



MSL1

* Pb Free Part

Customer Name	Standard Specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM900/GSM850 Rx (50/150ohms)	Date	March 31, 2010
Part Number	FAR-G5KC-942M50-Y4YW	Version 1.1bc	

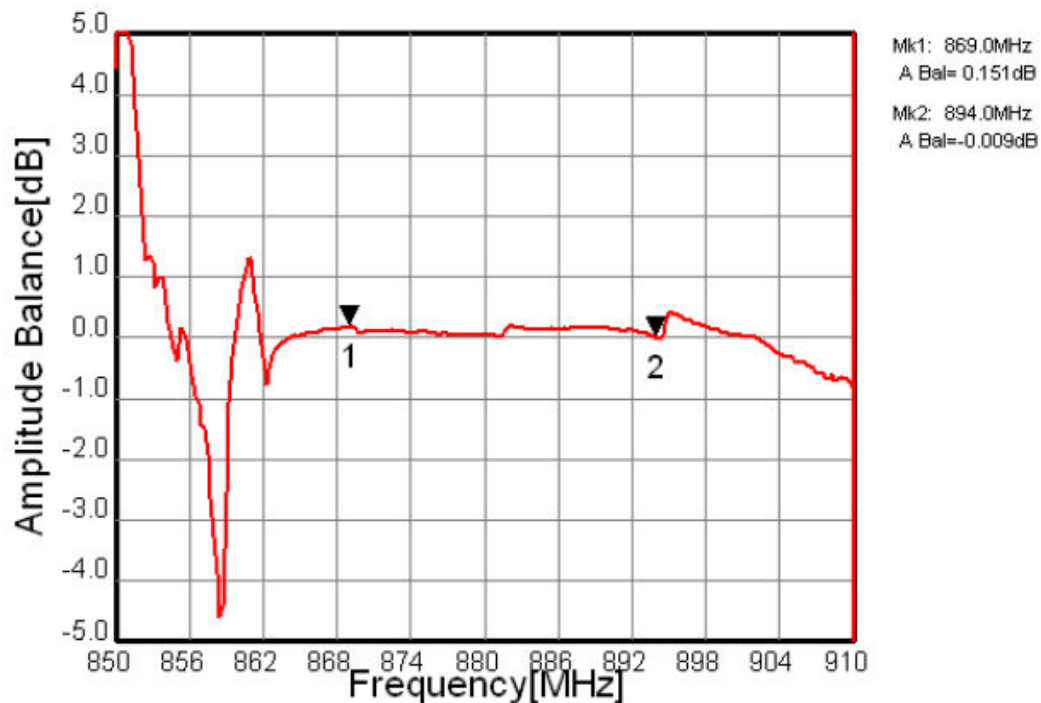


Fig.15 Amplitude Balance (Filter2)

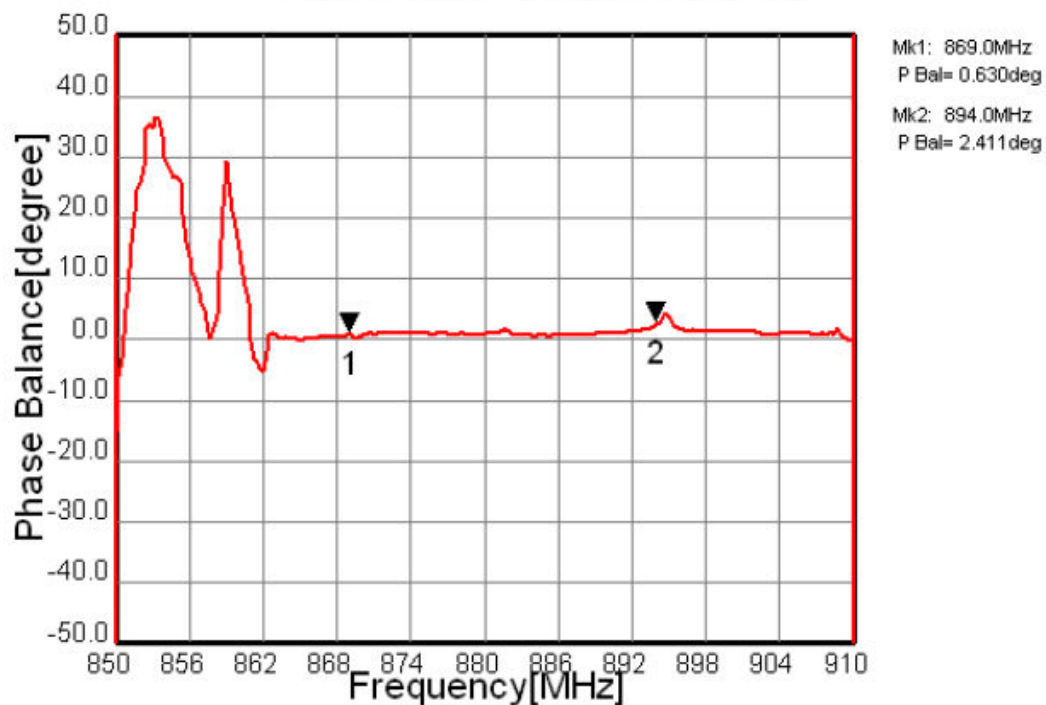


Fig.16 Phase Balance (Filter2)