



MSL1

*Pb Free part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	DATE	Jun., 22, 2011
Part Number	FAR-G6KC-1G9600-Y4YY	Version 1.1cc	

Table 1. Electrical specifications(Filter 1)

Pass Band (1930-1990MHz)						
Item	Condition (MHz)	Specification			Unit	Remark
		Min.	Typ.	Max.		
Insertion Loss	1930-1990	-	1.9	2.5	dB(*1)	
Ripple	1930-1990	-	0.5	1.2	dB	
Input VSWR	1930-1990	-	1.6	2.0	-	
Output VSWR	1930-1990	-	1.6	2.0	-	
Absolute attenuation	DC-1850	30	38	-	dB	
	1850-1910	11	14	-	dB	
	2010-2070	9	17	-	dB	
	2070-2150	20	22	-	dB	
	2150-3000	25	33	-	dB	
	3000-6000	30	38	-	dB	
Amplitude balance (S ₂₁ /S ₃₁)	1930-1990	-1.5	-0.6/+0.4	+1.5	dB	
Phase balance (∠S ₂₁ -∠S ₃₁)+180)	1930-1990	-12	-9/+2	+12	deg	
Input impedance (Unbalanced)		50			Ohm	
Output impedance (Balanced)		150//18nH			Ohm	
Operating temperature		-30 to +85			°C	

(*1) Specification of insertion loss includes loss that comes from the test board.



MSL1

*Pb Free part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	DATE	Jun., 22, 2011
Part Number	FAR-G6KC-1G9600-Y4YY	Version 1.1cc	

Table 2.Electrical specifications(Filter 2)

Pass Band (1805-1880MHz)						
Item	Condition (MHz)	Specification			Unit	Remark
		Min.	Typ.	Max.		
Insertion Loss	1805-1880	-	1.8	2.5	dB(*1)	
Ripple	1805-1880	-	0.4	1.3	dB	
Input VSWR	1805-1880	-	1.7	2.1	-	
Output VSWR	1805-1880	-	1.6	2.1	-	
Absolute attenuation	DC-1300	40	44	-	dB	
	1300-1705	30	36	-	dB	
	1705-1785	13	16	-	dB	
	1920-1980	19	21	-	dB	
	1980-3000	20	26	-	dB	
	3000-5000	35	42	-	dB	
	5000-6000	30	40	-	dB	
Amplitude balance (S ₂₁ /S ₃₁)	1805-1880	-1.5	-0.3/+1.0	+1.5	dB	
Phase balance (($\angle S_{21}$ - $\angle S_{31}$) + 180)	1805-1880	-10	-3/+6	+10	deg	
Input impedance (Unbalanced)		50			Ohm	
Output impedance (Balanced)		150//15nH			Ohm	
Operating temperature		-30 to +85			°C	

(*1) Specification of insertion loss includes loss that comes from the test board.




MSL1

*Pb Free part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	DATE	Jun., 22, 2011
Part Number	FAR-G6KC-1G9600-Y4YY	Version 1.1cc	

Dimensions

Device size: 1.8typ. x 1.4typ. x 0.5max.

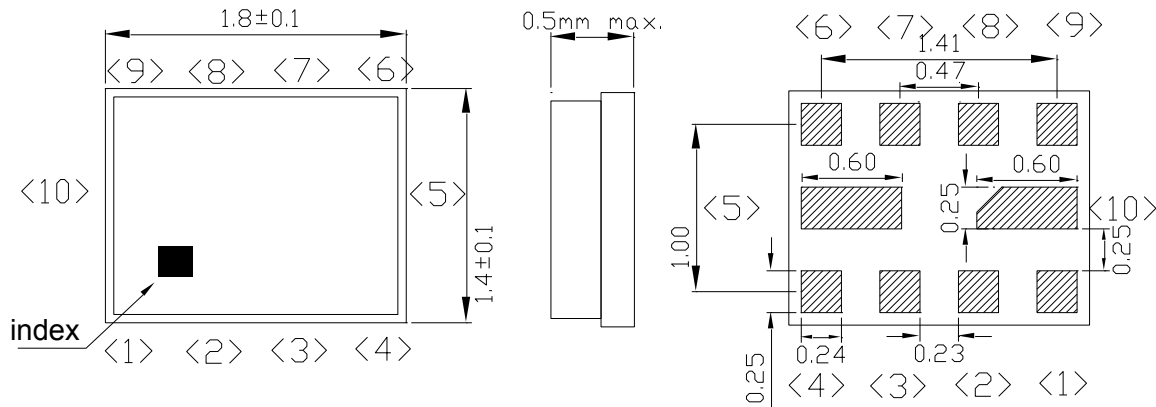


Unit : mm

Pin Configuration

Pin No.	Pin name	Description
1	IN	Filter1 input pin
2	GND	Ground
3	GND	Ground
4	IN	Filter2 input pin
5	GND	Ground
6	OUT	Filter2 balanced output pin
7	OUT	Filter2 balanced output pin
8	OUT	Filter1 balanced output pin
9	OUT	Filter1 balanced output pin
10	GND	Ground

Filter No.	Passband(MHz)	System
1	1930 ~ 1990	GSM1900-Rx
2	1805 ~ 1880	GSM1800-Rx

Evaluation Circuit

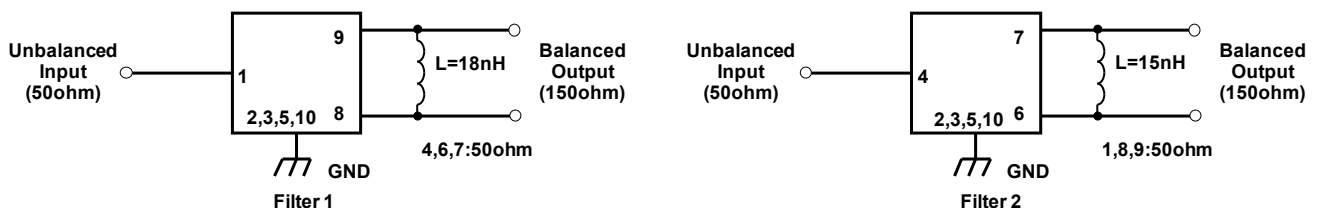

TAIYO YUDEN



MSL1

*Pb Free part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	DATE	Jun., 22, 2011
Part Number	FAR-G6KC-1G9600-Y4YY	Version 1.1cc	

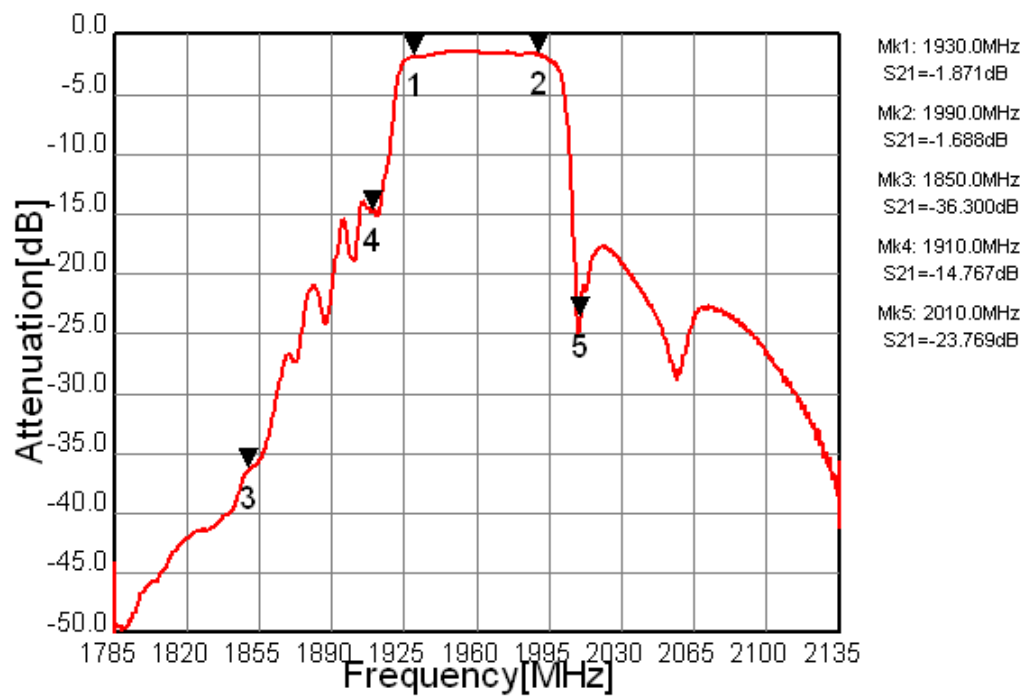


Fig.1 Pass-band Characteristic (Filter1)

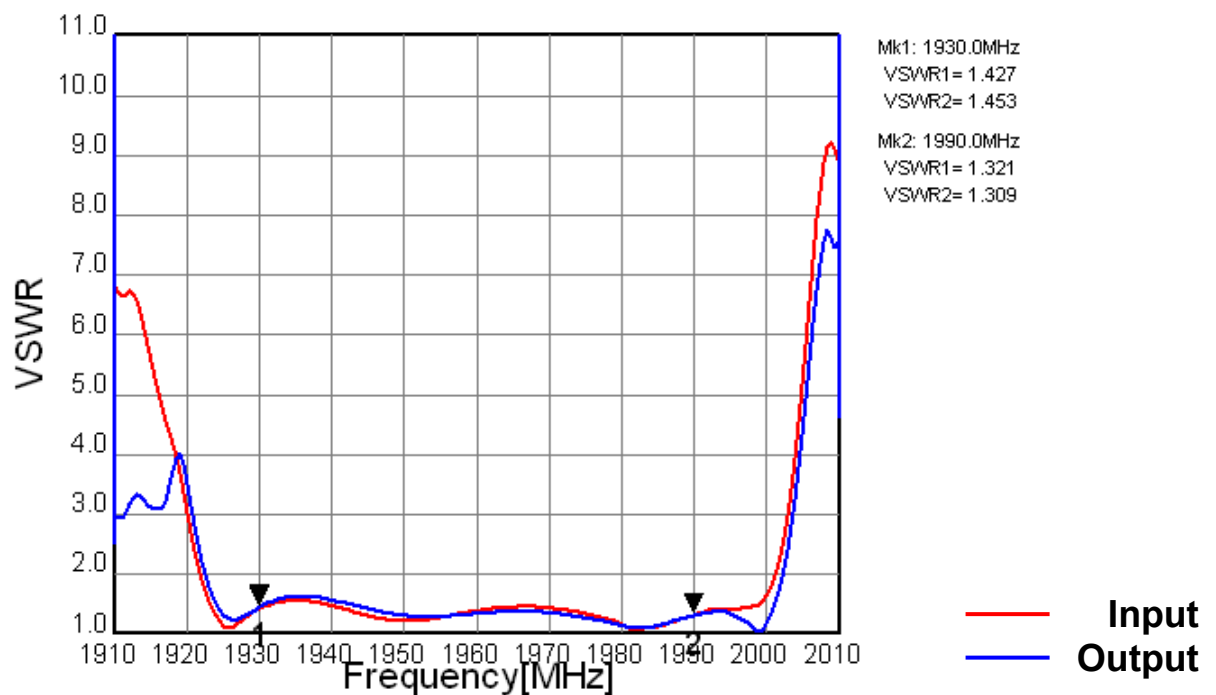


Fig.2 VSWR (Filter1)

TAIYO YUDEN



MSL1

*Pb Free part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	DATE	Jun., 22, 2011
Part Number	FAR-G6KC-1G9600-Y4YY	Version 1.1cc	

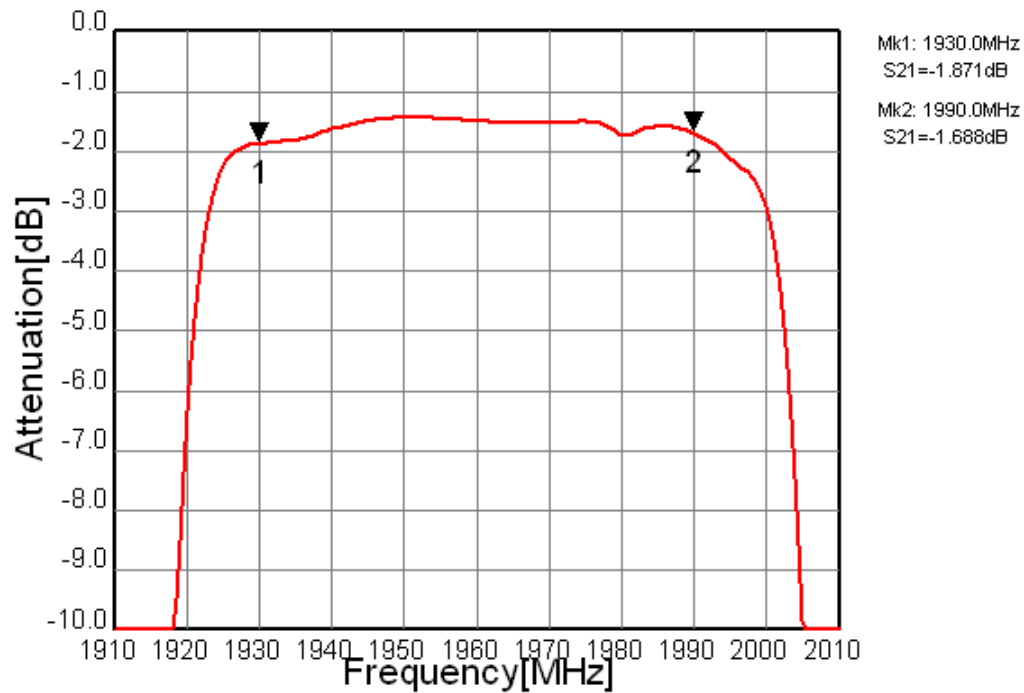


Fig.3 In-band Characteristic (Filter1)

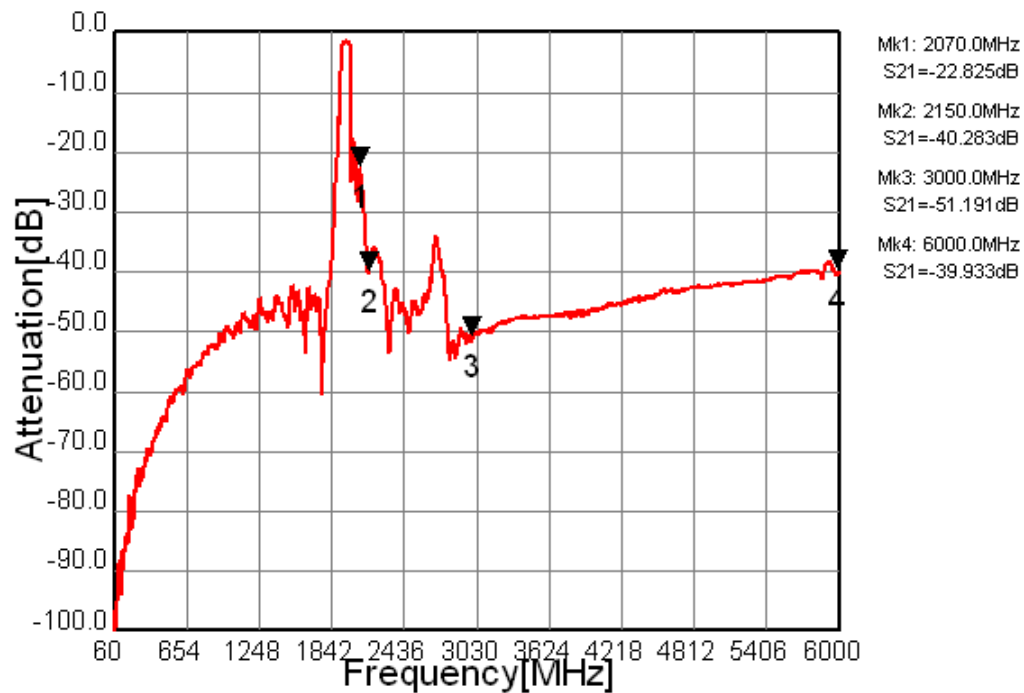


Fig.4 Wide-band Characteristic (Filter1)

TAIYO YUDEN



MSL1

*Pb Free part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	DATE	Jun., 22, 2011
Part Number	FAR-G6KC-1G9600-Y4YY	Version 1.1cc	

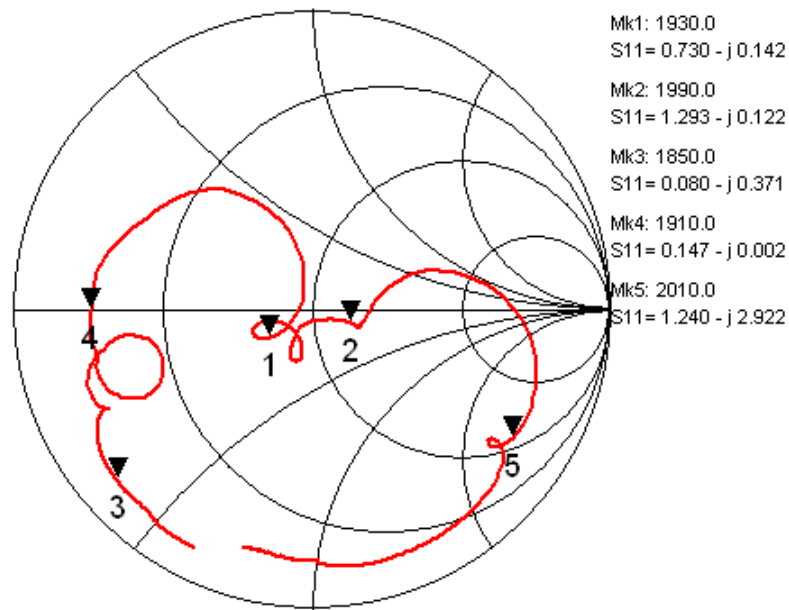


Fig.5 Impedance (S11) (Filter1)

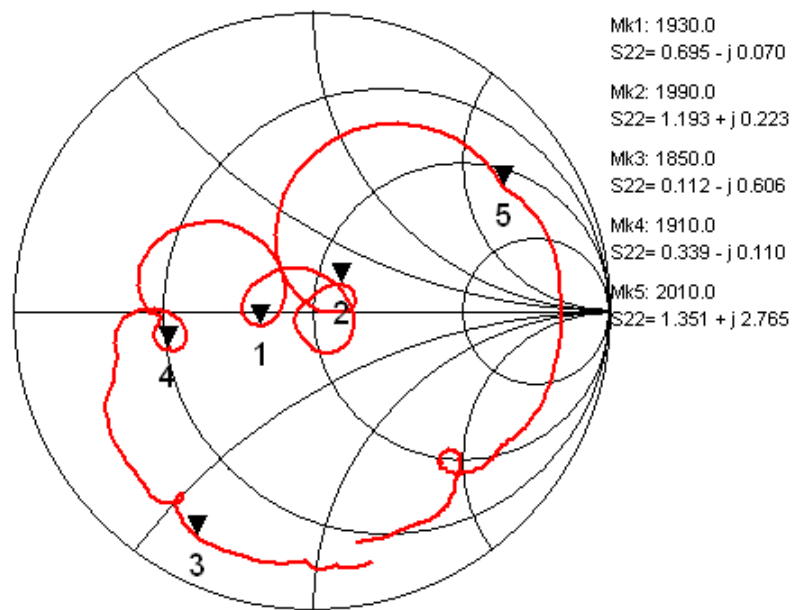


Fig.6 Impedance (S22) (Filter1)

TAIYO YUDEN



MSL1

*Pb Free part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	DATE	Jun., 22, 2011
Part Number	FAR-G6KC-1G9600-Y4YY	Version 1.1cc	

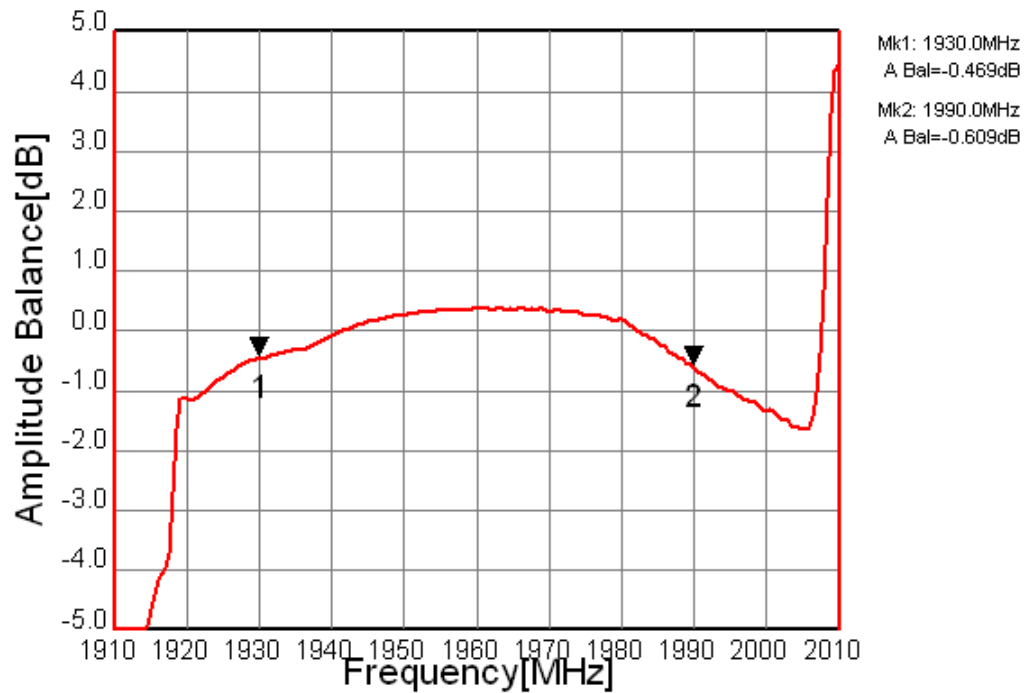


Fig.7 Amplitude Balance (Filter1)

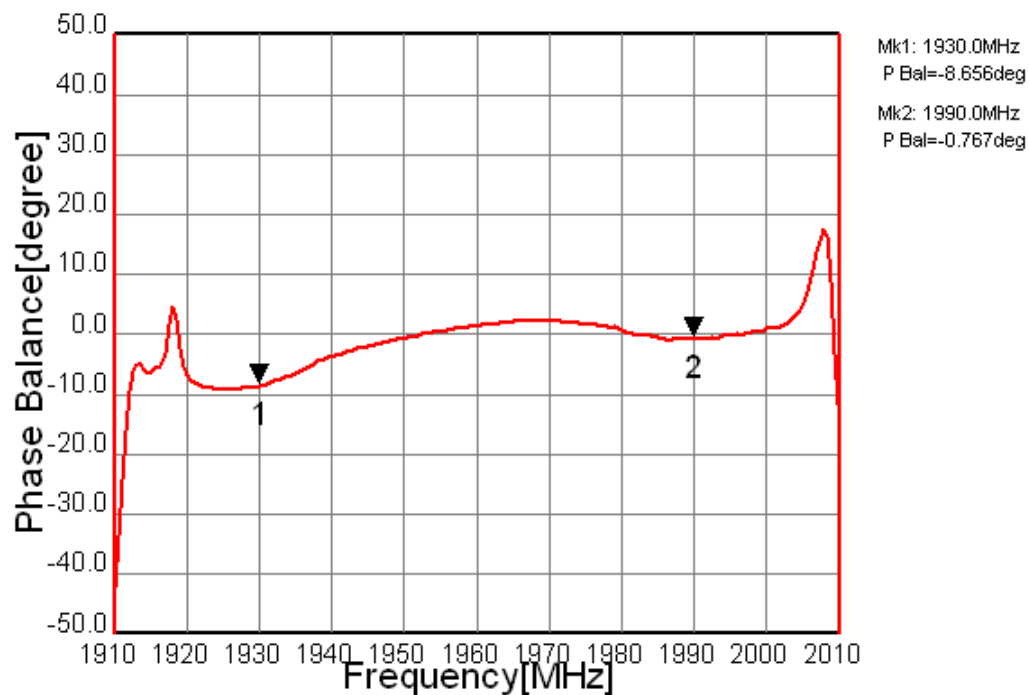


Fig.8 Phase Balance (Filter1)

TAIYO YUDEN



MSL1

*Pb Free part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	DATE	Jun., 22, 2011
Part Number	FAR-G6KC-1G9600-Y4YY	Version 1.1cc	

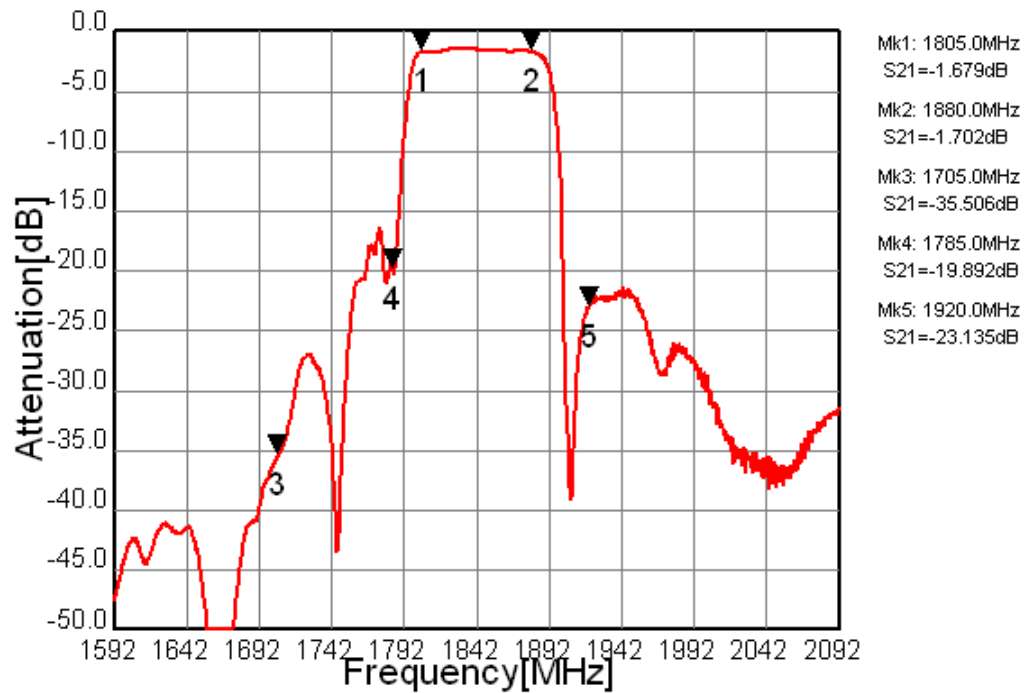


Fig.9 Pass-band Characteristic (Filter2)

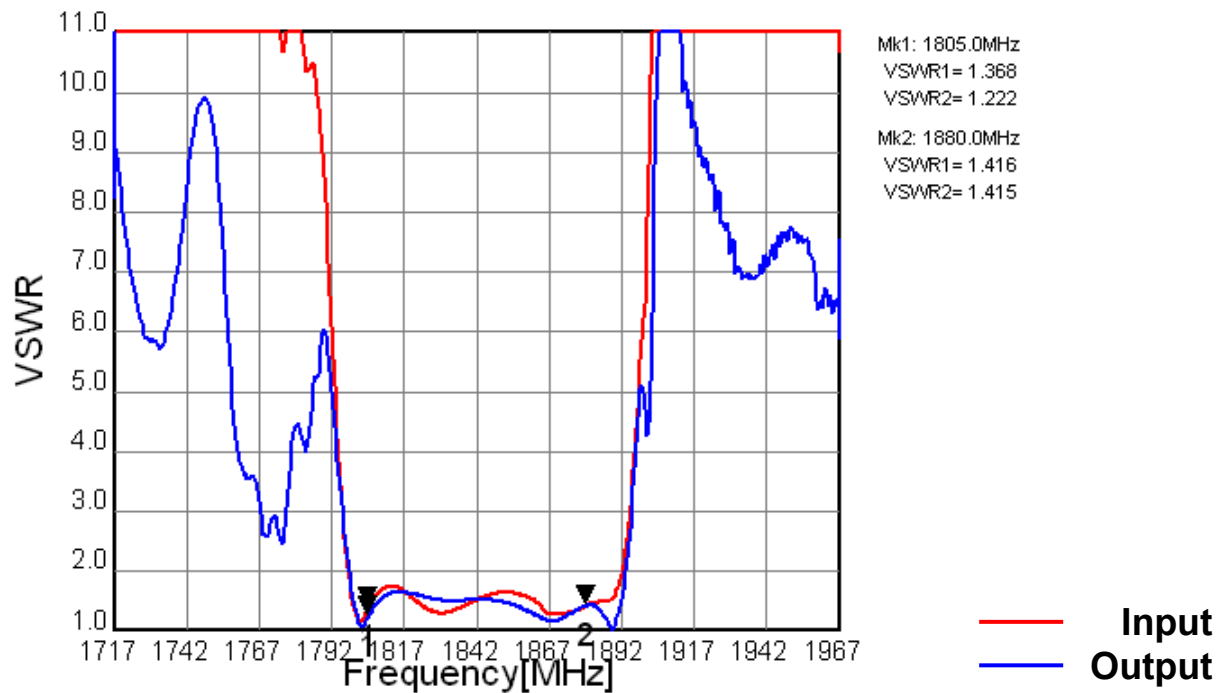


Fig.10 VSWR (Filter2)

TAIYO YUDEN



MSL1

*Pb Free part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	DATE	Jun., 22, 2011
Part Number	FAR-G6KC-1G9600-Y4YY	Version 1.1cc	

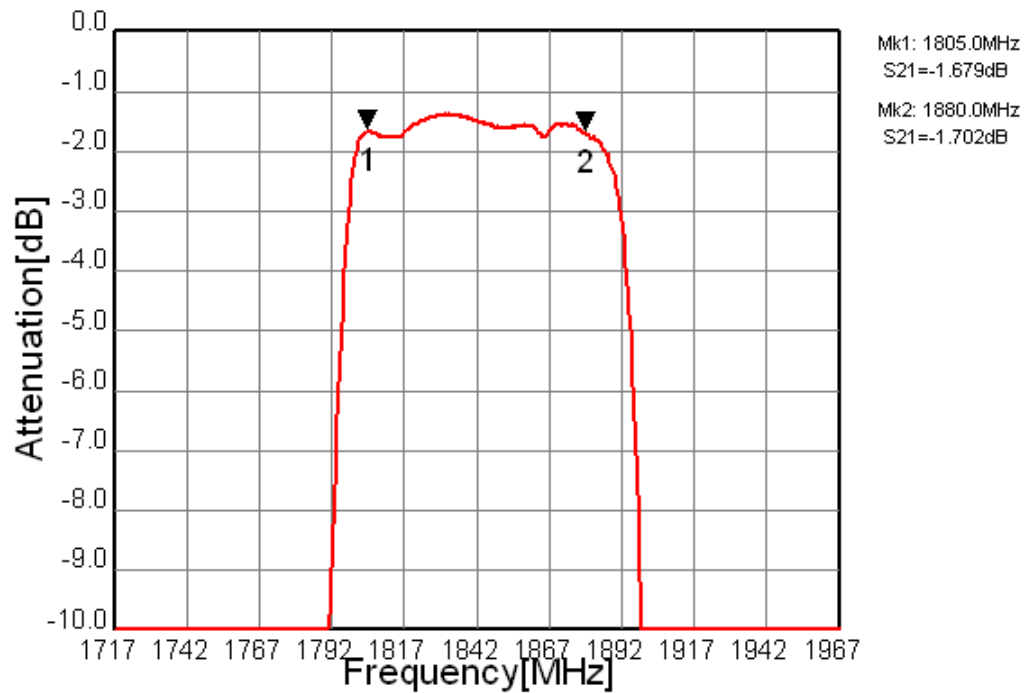


Fig.11 In-band Characteristic (Filter2)

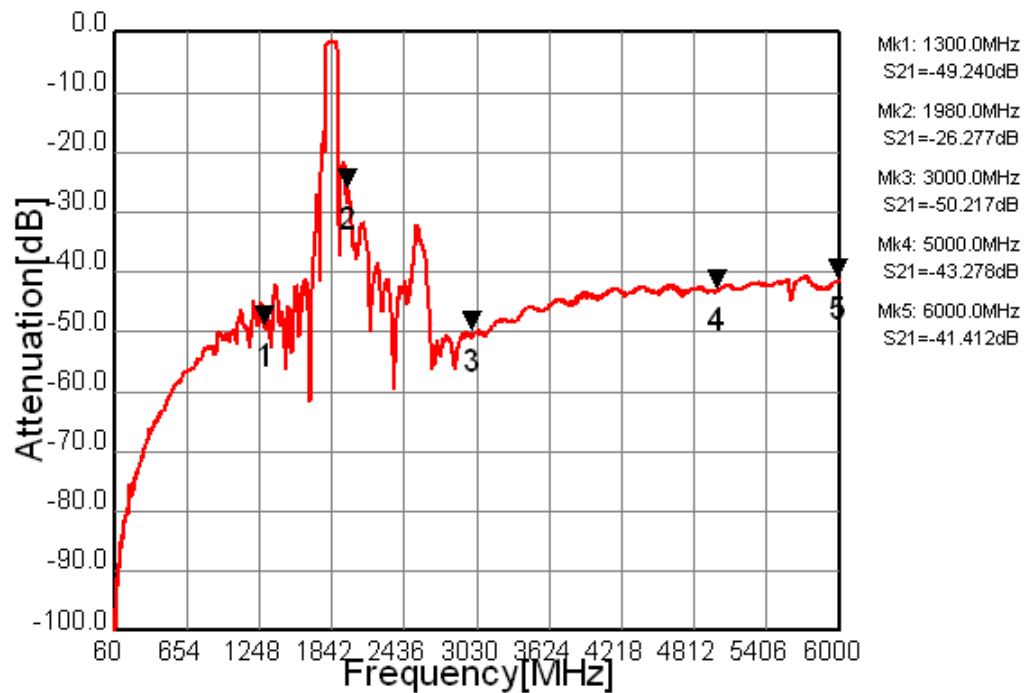


Fig.12 Wide-band Characteristic (Filter2)

TAIYO YUDEN



MSL1

*Pb Free part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	DATE	Jun., 22, 2011
Part Number	FAR-G6KC-1G9600-Y4YY	Version 1.1cc	

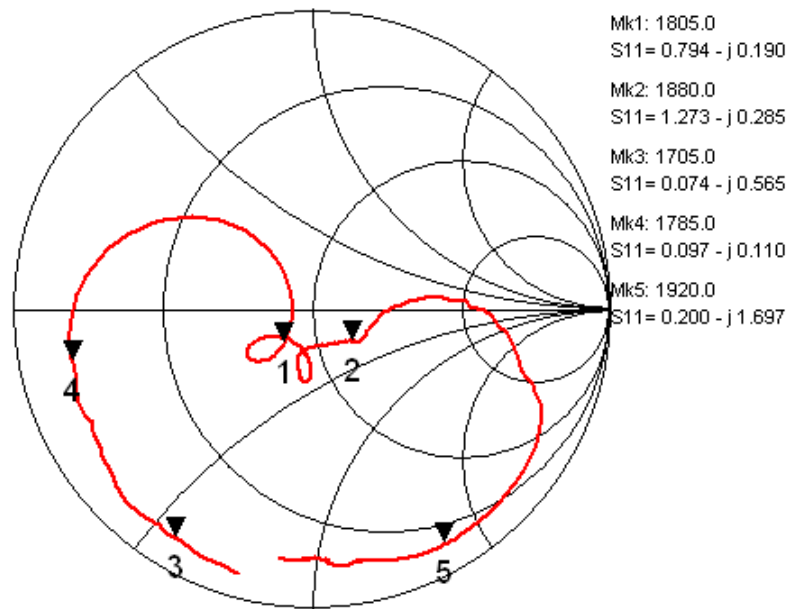


Fig.13 Impedance (S11) (Filter2)

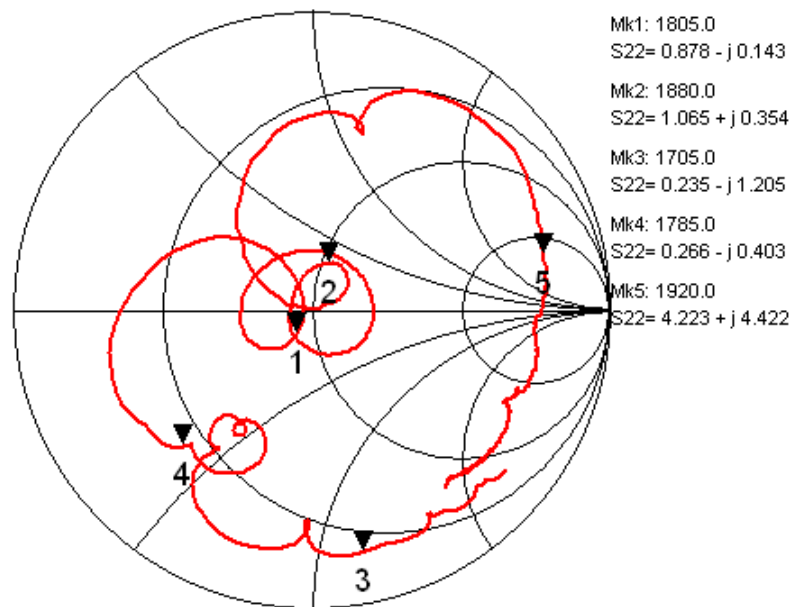


Fig.14 Impedance (S22) (Filter2)



MSL1

*Pb Free part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	GSM1900/GSM1800 Rx (50/150ohms)	DATE	Jun., 22, 2011
Part Number	FAR-G6KC-1G9600-Y4YY	Version 1.1cc	

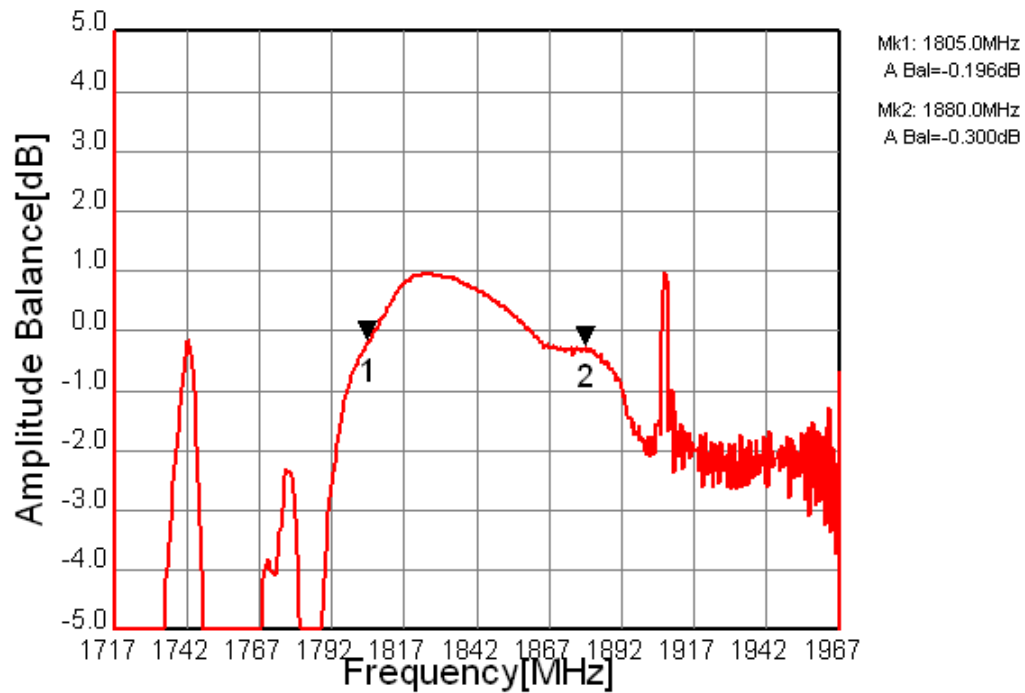


Fig.15 Amplitude Balance (Filter2)

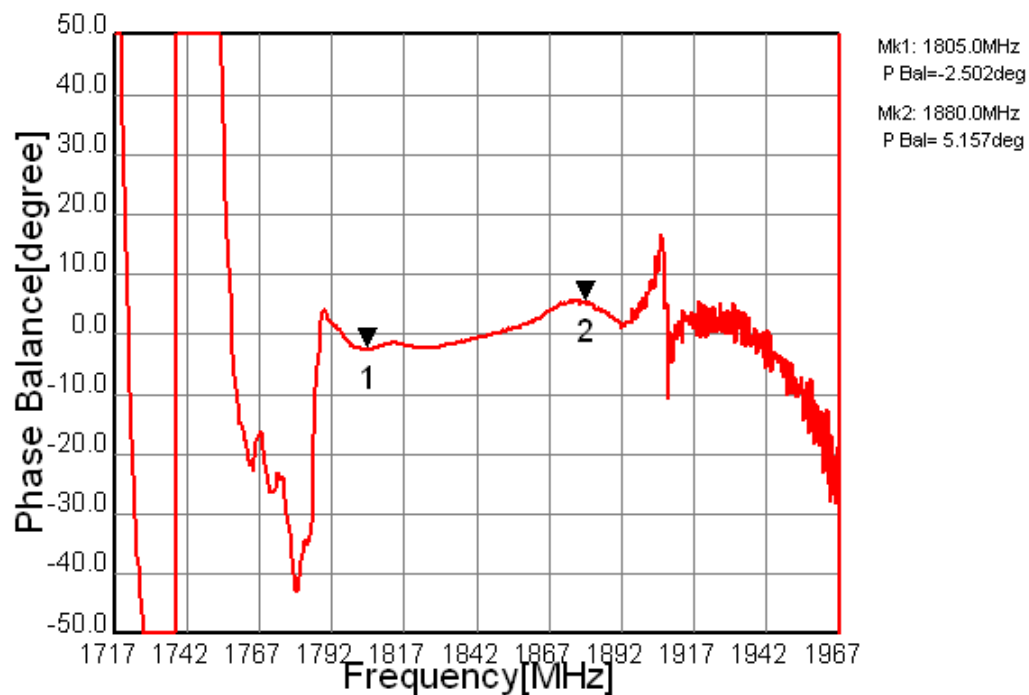


Fig.16 Phase Balance (Filter2)

TAIYO YUDEN