

samtec

(1,27 mm) .050"

YFW SERIES

SamArray®
HIGH DENSITY
INTERCONNECTS

YFW-30-25-H-10-SB

YFW-20-07-H-10-SB

YFW-20-07-H-05-SB

ELEVATED OPEN PIN FIELD STACKER

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?YFW

Insulator Material:

Black Liquid Crystal
Polymer

Terminal Material:

Brass

Current Rating:

2A per contact
@ 80°C ambient

Operating Temp Range:

-55°C to +125°C

Plating:

Au over 50µ" (1,27 µm) Ni

RoHS Compliant:

No

Lead-Free Solderable:

No



FILE NO. E111594

Mates with:
YFS




Five, eight
or ten rows

(1,27 mm)
.050"
pitch

Polarized

Choice of
board stack
heights

Tin-Lead
Solder Balls

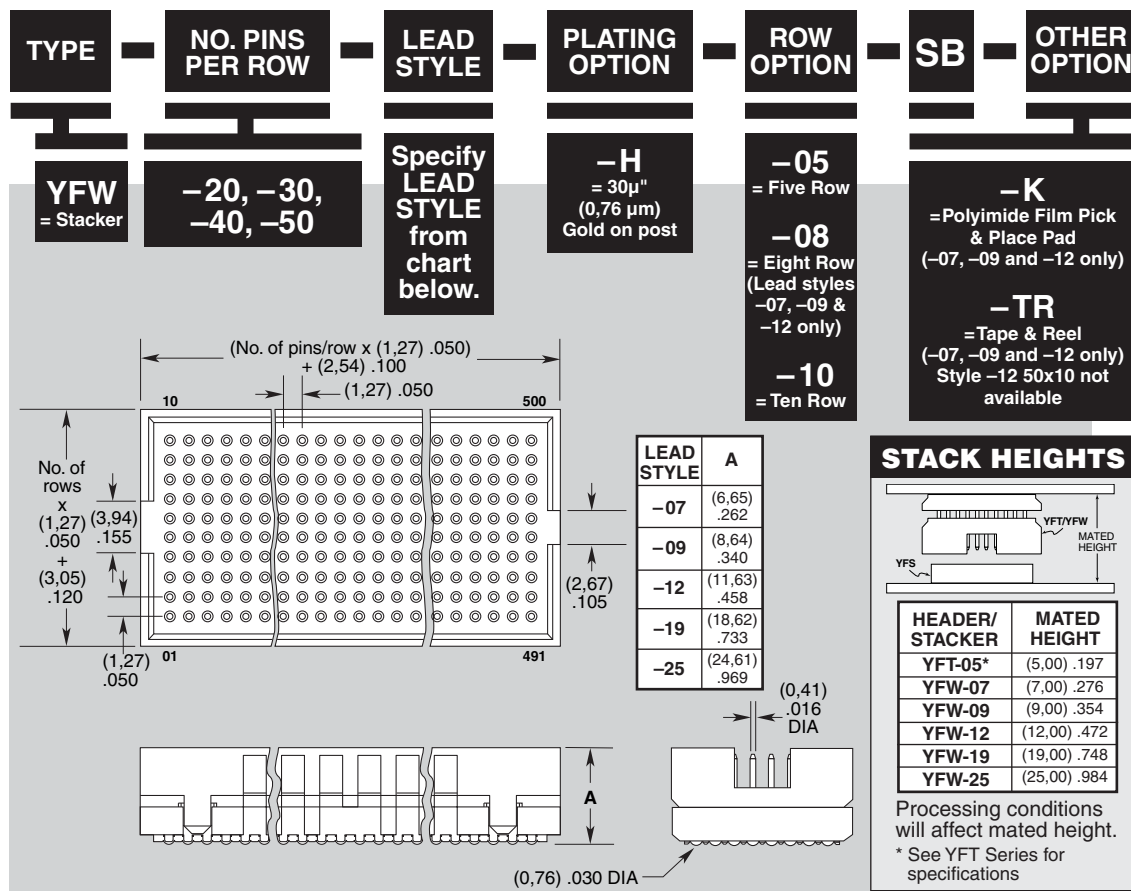

Note: Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTH CAROLINA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683