

APPLICABLE STANDARD		USB3.0 SPECIFICATION AND MICRO-USB CABLE AND CONNECTORS SPECIFICATION.			
RATING	OPERATING TEMPERATURE RANGE	-30°C TO +85°C		STORAGE TEMPERATURE RANGE	-30°C TO +60°C
	VOLTAGE	-		OPERATING HUMIDITY RANGE	- % TO - %
	CURRENT	-		APPLICABLE CABLE	OUTER DIAMETER OF CABLE : φ 3.3
SPECIFICATIONS					
ITEM		TEST METHOD		REQUIREMENTS	QT AT
CONSTRUCTION					
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.		ACCORDING TO DRAWING.	X X
MARKING		CONFIRMED VISUALLY.			X X
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
△					
REMARK HIROSE will not guarantee the performance on these specifications In case this product will be mated with the others which is not HIROSE's. Unless otherwise specified, refer to USB2.0 or EIA 364 .			APPROVED	AO. SUZUKI	09. 06. 16
			CHECKED	KN. ICHIKAWA	09. 06. 16
			DESIGNED	TS. SAKAIZAWA	09. 06. 15
			DRAWN	TS. SAKAIZAWA	09. 06. 15
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC4-127030-00
HS	SPECIFICATION SHEET		PART NO.	ZX360-B-SLDA	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL242-0502-7-00	△ 1/1

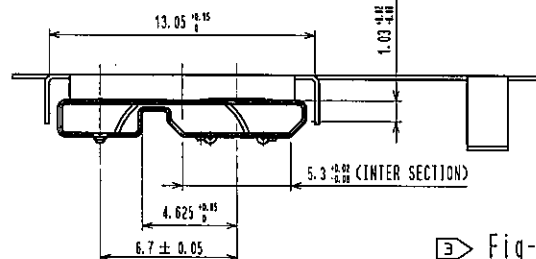
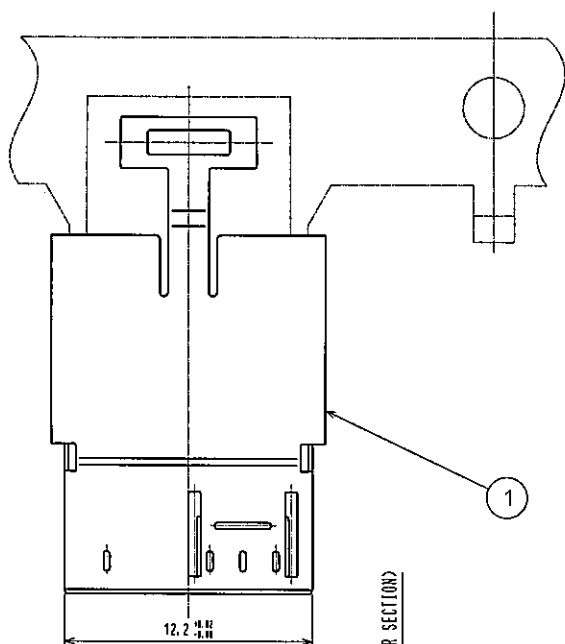


Fig-2 COMPONENT BREAK OFF FIGURE (FREE)



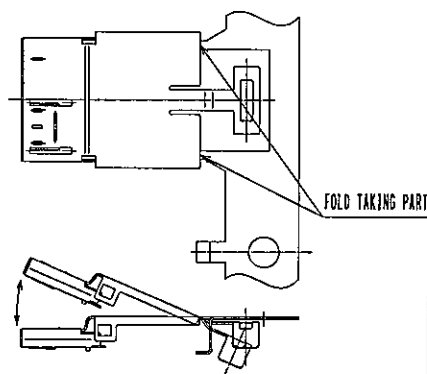


Fig-1 DRAWING FOR PACKING (FREE)

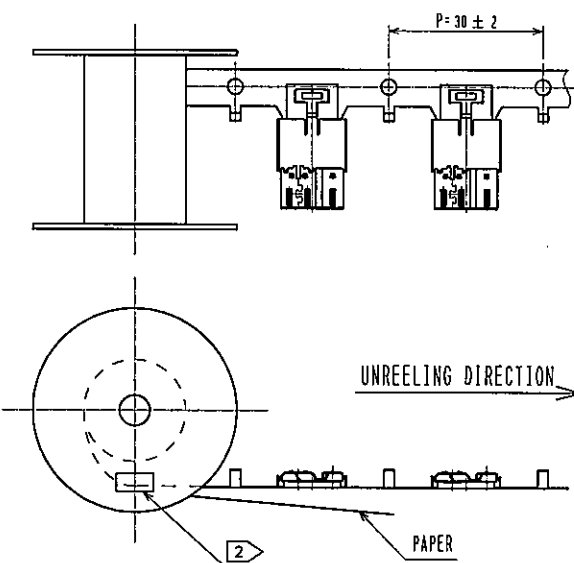

- NOTE 1 THIS IS DELIVERED BY A REEL. QTY : 2700 PCS. Δ Δ
 2 INDICATE 'Part No.', 'CL No.', 'Lot No.', AND QUANTITY ON BOTH REEL AND THE SIDE SURFACE OF THE SHIPPING OUTER BOX.
 3 REMOVE THE COMPONENT FROM THE CARRIER FOR USE AS SHOWN IN Fig. 2.

NO.		MATERIAL		FINISH . REMARKS		NO.		MATERIAL		FINISH . REMARKS	
UNITS		SCALE		COUNT		DESCRIPTION OF REVISIONS		DESIGNED		CHECKED	
1/10		4 : 1		1		DIS-E-003420		TF.HIGASHIYAMA		AO.SUZUKI	
APPROVED		AO.SUZUKI		10.08.07		DRAWING NO.		EDC3-127030-00		DATE	
CHECKED		KN.ICHIKAWA		10.08.07		PART NO.		ZX360-B-SLDA		10.08.08	
DESIGNED		TY.MIURA		10.08.06		CODE NO.		CL242-0502-7-00		10.08.08	
DRAWN		TY.MIURA		10.08.06							