

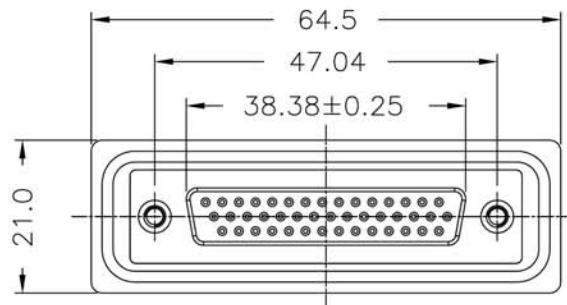
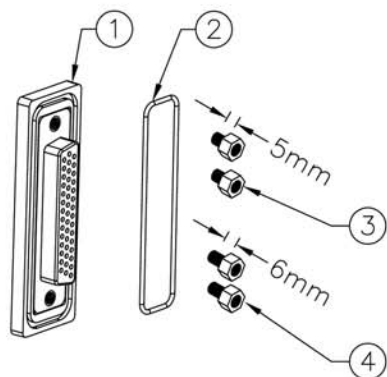
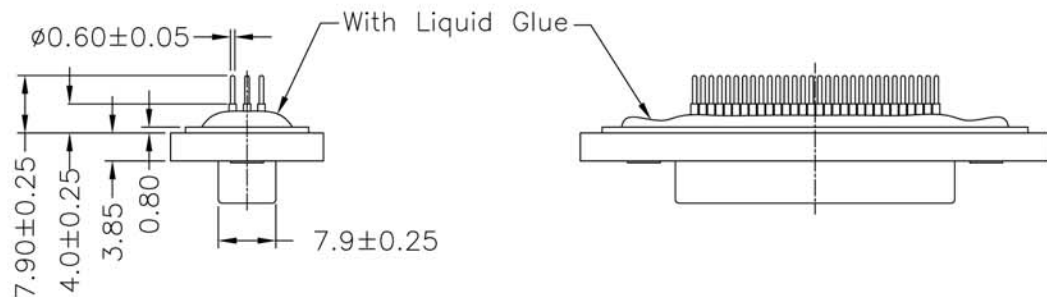


Note:

- * Waterproof Rate : IP67
- * Connector: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated



Screw L=6.0 For Panel Thickness
Between 1.2~2.0mm

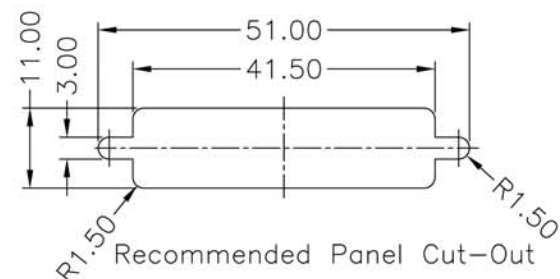

RoHS
Compliant

ITEM NO
A-HDF44PP-WP

TITLE
D-SUB, High Density, Female, 44 pin, 180°

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283
Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
© Copyright 2008 by Assmann Electronic Components
All International Rights Reserved