


1.5GHz Multilayer RadiEdge Antenna (for GPS)

Date: Sep/01/2011

AH 316M157501

Shapes

L= 3.2 ± 0.15 mm
W= 1.6 ± 0.15 mm
T= 0.5 ± 0.1 mm

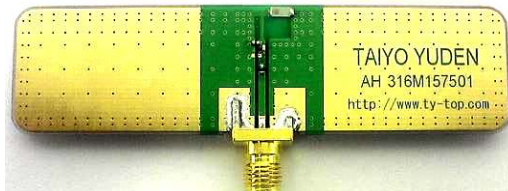

*on Taiyo Yuden's Evaluation Board
(80 x 20 mm)

*antenna keep out area : 6 x 5 mm

Feature

- * Ultra Small
- * Low Profile
- * High Performance
- * Small Keep-out Area
- * Linear Polarization



Electrical Characteristics

@1575MHz		linear polarization		circular polarization	
Efficiency [dB]		-0.8 (83%)			
Peak gain		2.4 [dBi]		-0.6 [dBic]	
Average gain	XY-plane	TX-H	-2.5	LC	-5.1
		TX-V	-12.5	RC	-5.1
	YZ-plane	TX-H	-1.7	LC	-4.7
		TX-V	-31.0	RC	-4.7
	ZX-plane	TX-H	-33.7	LC	-2.3
		TX-V	0.7	RC	-2.3


TX-H=Horizontal polarization
TX-V=Vertical polarization

LC=Left-handed circular polarization
RC=Right-handed circular polarization


Actual data

Efficiency : -0.8dB (83%)
Peak Gain : 2.4dBi
Average Gain : 0.7dBi (ZX plane-Vertical polarization)
@1575MHz
-0.6dBic (circular polarization)
-2.3dBic (ZX plane-RHCP)

VSWR

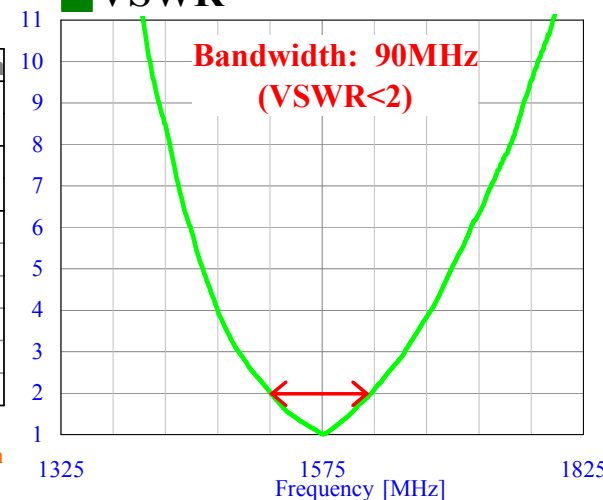

Radiation Pattern

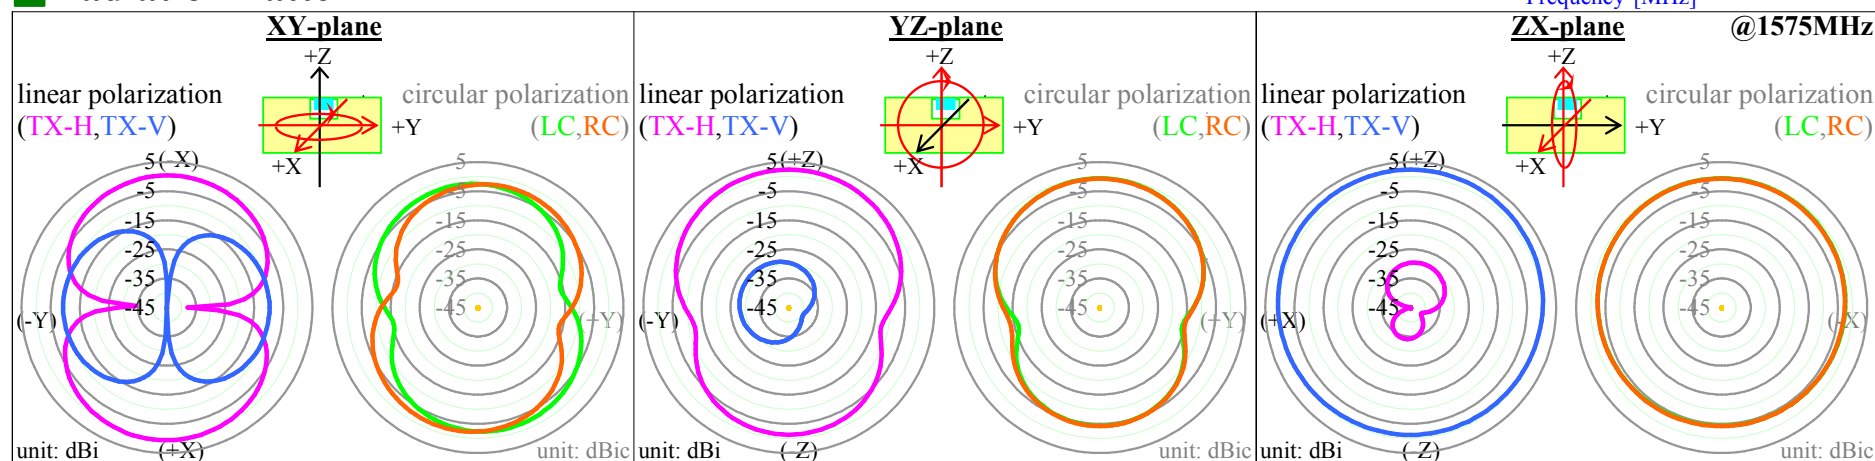

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.

TAIYO YUDEN reserves the right to make change to the Date at any time without notice.

Before making final selection, please check product specification