



**Miniature SOP6-pin type
with high capacity
of 3A load current**

**PhotoMOS®
HE SOP 1 Form A
High Capacity (AQV250GOS)**



FEATURES

1. High capacity in a miniature SOP package

Continuous load current: Max. 3A
Load voltage: 50V and 80V

2. Greatly improved specifications allow you to use this in place of mercury and mechanical relays.

TYPICAL APPLICATIONS

- Security equipment
- Fire-preventing system
- Measuring instruments

RoHS compliant

TYPES

AC/DC dual use	Output rating*		Package	Part No.			Packing quantity		
	Load voltage	Load current		Surface-mount terminal					
				Tube packing style	Tape and reel packing style	Tube	Tape and reel		
New	50 V	3.0 A	SOP6-pin	AQV252G2S	AQV252G2SX	AQV252G2SZ	1 tube contains: 75 pcs. 1 batch contains: 1,500 pcs.	1,000 pcs.	
	80 V	1.25 A		AQV255GS	AQV255GSX	AQV255GSZ			

Note: For space reasons, the two initial letters of the part number "AQ" and the packing style indicator "X" or "Z" are not marked on the device.

* Indicate the peak AC and DC values.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV252G2S	AQV255GS	Remarks
Input	LED forward current	I _F	A	50 mA		
	LED reverse voltage	V _R		5 V		
	Peak forward current	I _{FP}		1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}		75 mW		
Output	Load voltage (peak AC)	V _L	A	50 V	80 V	
	Continuous load current	I _L		3.0 A	1.25 A	A connection: Peak AC, DC B, C connection: DC
	Peak load current	I _{peak}		3.5 A	1.75 A	
	Power dissipation	P _{out}	B	6.0 A	2.5 A	
	Total power dissipation	P _T	C	6 A	3 A	100ms (1 shot), V _L = DC at A connection
I/O isolation voltage		V _{iso}		450 mW		
Temperature limits		T _{opr}		500 mW		
Operating		T _{stg}		1,500 V AC		Non-condensing at low temperatures
Storage				-40°C to +85°C -40°F to +185°F		
				-40°C to +100°C -40°F to +212°F		


HE SOP 1 Form A High Capacity (AQV25OGOS)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item	Symbol	Type of connection	AQV252G2S	AQV255GS	Condition
Input	LED operate current	Typical	I _{Fon}	—	I _L = 100mA
		Maximum	—	0.6 mA 3 mA	
	LED turn off current	Minimum	I _{Foff}	—	I _L = 100mA
		Typical	—	0.2 mA 0.5 mA	
Output	LED dropout voltage	Typical	V _F	—	I _F = 50 mA
		Maximum	—	1.32 V (1.14 V at I _F = 5 mA) 1.5 V	
	On resistance	Typical	R _{on}	A	A connection I _F = 5 mA, I _L = Max. Within 1 s on time
		Maximum	—	0.04 Ω 0.07 Ω	
		Typical	R _{on}	B	B connection I _F = 5 mA, I _L = Max. Within 1 s on time
		Maximum	—	0.025 Ω 0.04 Ω	
		Typical	R _{on}	C	C connection I _F = 5 mA, I _L = Max. Within 1 s on time
		Maximum	—	0.01 Ω 0.02 Ω	
Transfer characteristics	Off state leakage current	Maximum	I _{Leak}	—	1 μA
	Turn on time*	Typical	T _{on}	—	I _F = 5 mA, I _L = 100 mA V _L = 10 V
		Maximum	—	—	
	Turn off time*	Typical	T _{off}	—	I _F = 5 mA, I _L = 100 mA V _L = 10 V
		Maximum	—	—	
	I/O capacitance	Typical	C _{iso}	—	f = 1 MHz V _B = 0 V
		Maximum	—	—	
Initial I/O isolation resistance	Minimum	R _{iso}	—	—	1,000 MΩ
	Maximum	—	—	2.5 times/s	500 V DC
Max. switching frequency	Maximum	—	—	5 times/s	I _F = 5 mA, duty = 50% I _L = Max., V _L = Max.

Note: Please refer to the "Schematic and Wiring Diagrams" for connection method.

*Turn on/Turn off time

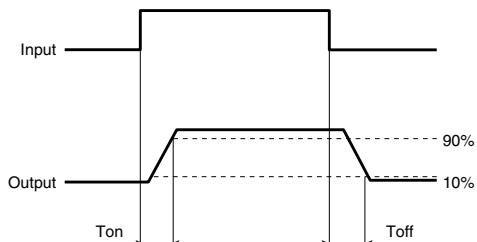

RECOMMENDED OPERATING CONDITIONS


Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I _F	5 to 10	mA


HE SOP 1 Form A High Capacity (AQV250GOS)

REFERENCE DATA


1.-(1) Load current vs. ambient temperature characteristics
 Sample: AQV252G2S
 Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$

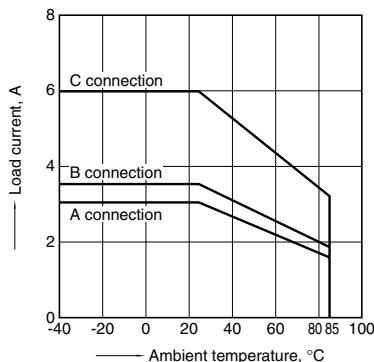

1.-(2) Load current vs. ambient temperature characteristics
 Sample: AQV255GS
 Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$

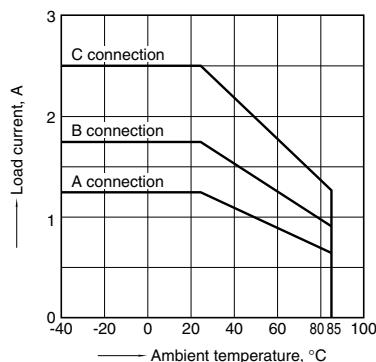


2. On resistance vs. ambient temperature characteristics
 Measured portion: between terminals 4 and 6;
 LED current: 5 mA; Load voltage: Max. (DC)
 Continuous load current: Max. (DC)

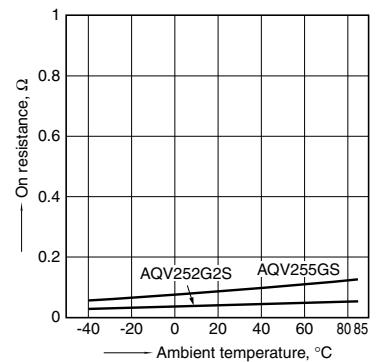


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)

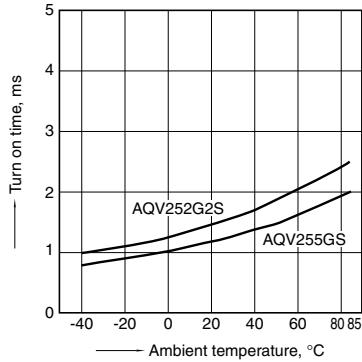


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)

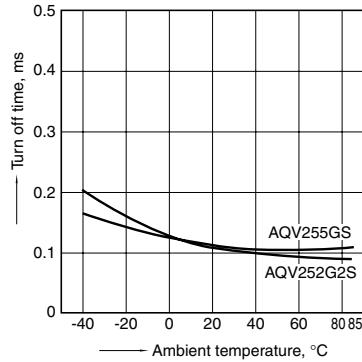


5. LED operate current vs. ambient temperature characteristics

Load voltage: 10 V (DC);
 Continuous load current: 100mA (DC)

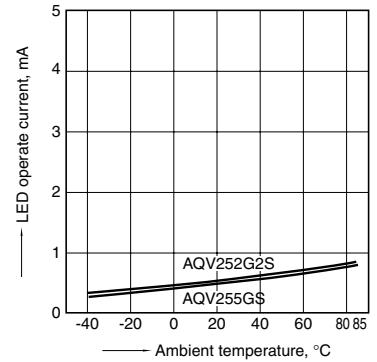


6. LED turn off current vs. ambient temperature characteristics

Load voltage: 10 V (DC);
 Continuous load current: 100mA (DC)

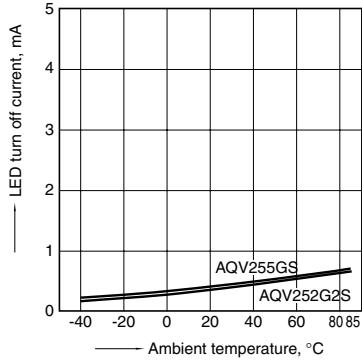


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

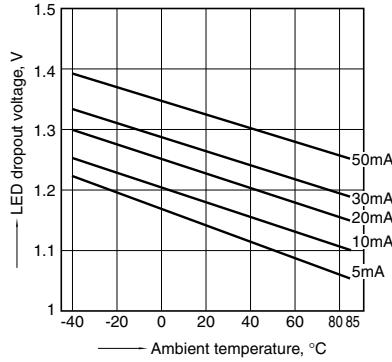


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
 Ambient temperature: 25°C 77°F




HE SOP 1 Form A High Capacity (AQV25OGOS)


9. Off state leakage current vs. load voltage characteristics
 Measured portion: between terminals 4 and 6;
 Ambient temperature: 25°C 77°F

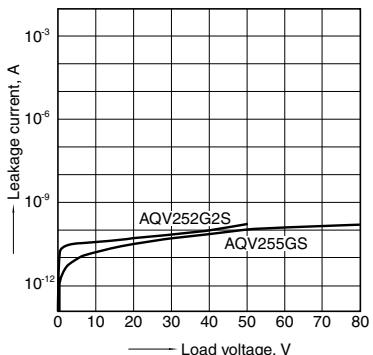


10. Turn on time vs. LED forward current characteristics
 Measured portion: between terminals 4 and 6;
 Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC);
 Ambient temperature: 25°C 77°F

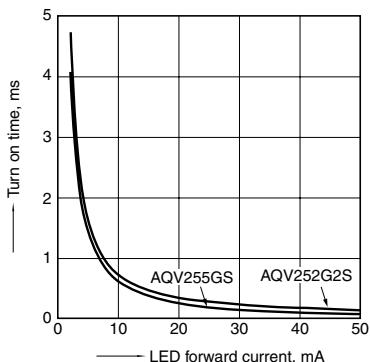

11. Turn off time vs. LED forward current characteristics
 Measured portion: between terminals 4 and 6;
 Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC);
 Ambient temperature: 25°C 77°F

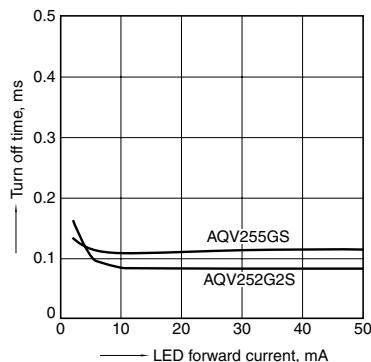

12. Output capacitance vs. applied voltage characteristics
 Measured portion: between terminals 4 and 6;
 Frequency: 1 MHz;
 Ambient temperature: 25°C 77°F

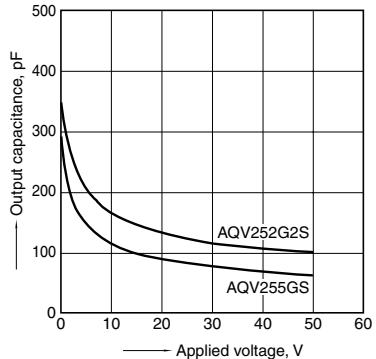

13. Max. switching frequency vs. load voltage and load current
 LED current: 5 mA
 Ambient temperature: 25°C 77°F

