
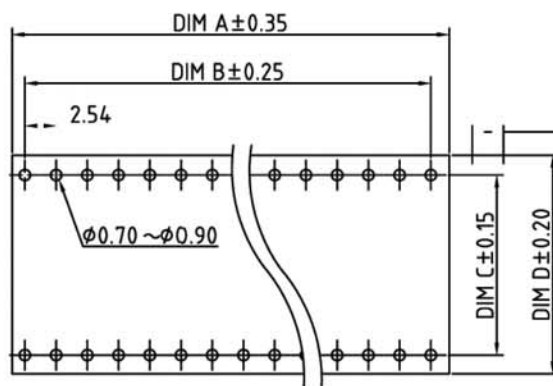
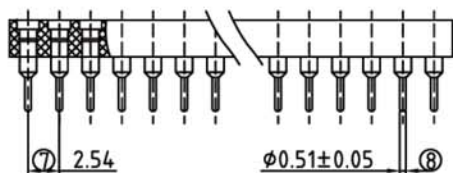
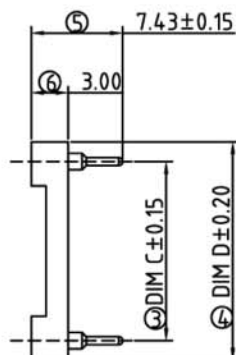


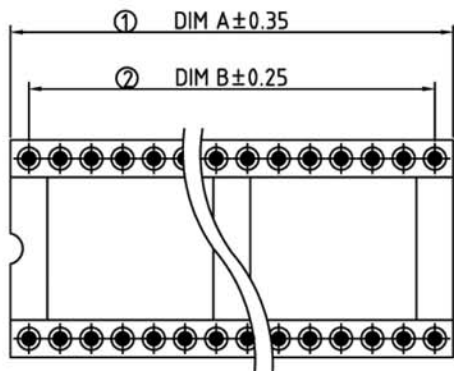

P.C.B. LAYOUT

Notes:

- Pin: Brass, Machined
- Clip: 4 Finger Contact
- Plating: Pin - Tin
- Insulator: Polyamide UL94V-0
- Current Rating: 3A
- Contact Resistance: $< 4\text{m}\Omega$ / Contact
- Insulation Resistance: $> 1000\text{M}\Omega$ at 100V
- Operating Temperature: -40°C to $+105^\circ\text{C}$

No. of Contacts	Qty per Tube	Dimensions		
		A	B	C
06	80	7.62	10.0	7.62
08	60	10.06	9.96	7.62
14	34	17.68	9.96	7.62
16	30	20.22	9.96	7.62
18	26	22.76	9.96	7.62
20	24	22.86	9.96	7.62
22	21	27.80	9.96	7.62
22*	21	27.70	12.62	10.16
24	20	30.38	17.68	15.24
24**	20	30.38	17.68	7.62
28	17	35.46	17.68	15.24
28**	17	35.46	17.68	7.62
32	15	40.50	17.68	15.24
40	12	50.70	17.68	15.24
48	9	60.96	58.42	15.24
64	7	81.28	78.74	22.86

RoHS
Compliant

ITEM NO
ARXX-HZL-TT-R

TITLE

Precision IC-Socket, Machined Contacts, Pitch 2.54mm, Tin Version

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 – Tempe, AZ 85283
Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
© Copyright 2008 by Assmann Electronic Components
All International Rights Reserved