

## Materials

Pin (outer sleeve) :	Brass, machined, CuZn38Pb2
Clip (contact 4 finger) :	Beryllium copper, heat treated or PHBZ
Plating (outer sleeve) :	Tin plated : 2µm/80µ"nickel, 5µm/200µ" Tin
Plating clip (contact):	2µm/80µ"nickel, full gold
Insulator body (black) :	Glass filled thermoplastic polyester UL94V-0





## Electrical

Current rating :	3 Amps/contact max.
Contact resistance :	Max 4mΩ
Insulation resistance :	Min 10,000mΩ @ 500 V AC
Operating Voltage :	100 VRMS / 150 V AC

## Mechanical

Operating temperature :	Tin plated: -40°C to +105°C
Average insertion force with steel pin of:	0.43mm/0.017" <250g
Average withdrawal force with steel pin of:	0.43mm/0.017" >50g
Mechanical life :	min.200

Packaging: Tube

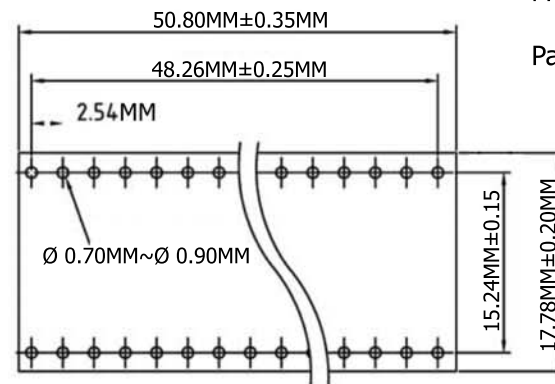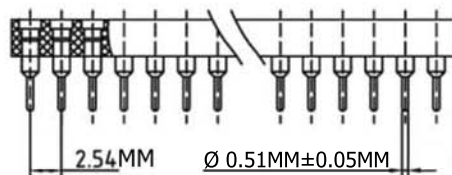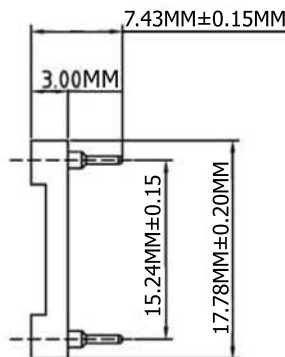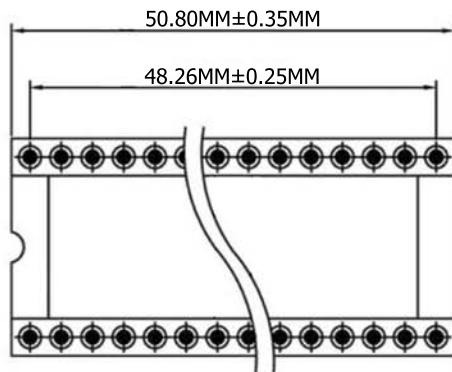

P.C.B. LAYOUT

**RoHS**  
Compliant

ITEM NO

**AR40-HZL/07-TT-R**

TITLE IC-Socket, 40Pin, Machined Contacts,  
30µ" Gold Plating, Pitch: 2.54MM, Pin Length: 7.43MM

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
© Copyright 2009 by Assmann Electronic Components  
All International Rights Reserved