






1	BLACK	4
2	RED	3
3	GREEN	2
4	YELLOW	1

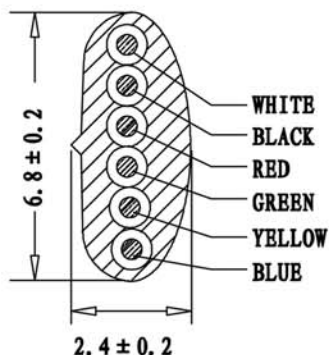


1	WHITE	6
2	BLACK	5
3	RED	4
4	GREEN	3
5	YELLOW	2
6	BLUE	1



1	WHITE	8
2	ORANGE	7
3	BLACK	6
4	RED	5
5	GREEN	4
6	YELLOW	3
7	BLUE	2
8	BROWN	1

*** CONDUCTOR: [26AWG (0.16/7) BARE COPPER]
 INSULATION: [PP6331 ID:0.95±0.03]
 JACKET: PVC NOUL 65P

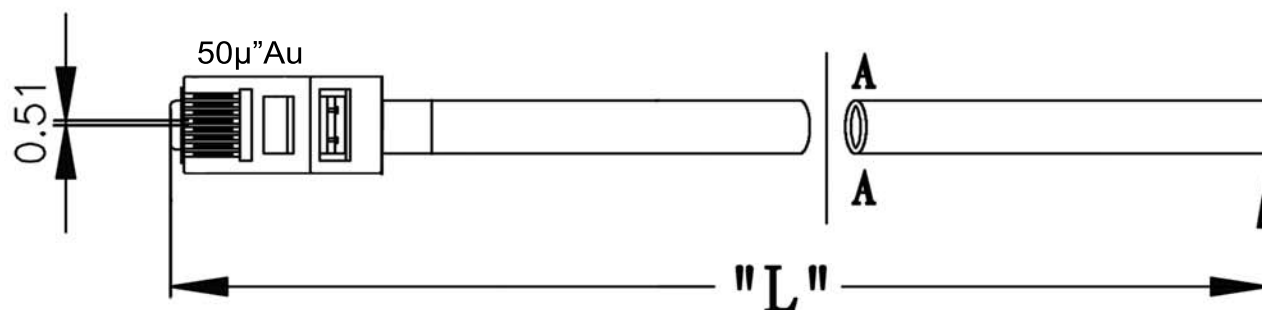

LENGTH "L"	
Xft +/- x (Xmm +/- x)	
5FT	(1525 ± 20)
7FT	(2135 ± 30)
10FT	(3050 ± 60)
12FT	(3660 ± 60)
14FT	(4270 ± 60)
25FT	(7625 ± 100)

HOW TO ORDER : AT-S-26-X/X/X-X-OE-R

CONDUCTORS
4, 6, 8

B - BLACK
W - WHITE
S - SILVER

LENGTH
5, 7, 10, 12, 14, 25,
50 FEET

RoHS
Compliant

ITEM NO

AT-S-26-X/X/X-X-OE-R

TITLE

Single Ended Flat

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
 © Copyright 2008 by Assmann Electronic Components
 All International Rights Reserved