

MICRO SWITCH

FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL INC
FED MFG CODE 91929

SWITCH - BASIC

CATALOG LISTING

BA-1RV5435247-A2

ABN4007

BA-1RV5435247-A2

PAGE 1 OF 1

DRAWING
NUMBER

5

ISSUE

REPLACES X87691-B A

RELEASE NO PR-17082

CHECK

17 FEB 06

17 FEB 06

17 FEB 06

17 FEB 06

17 FEB 06

17 FEB 06

17 FEB 06


17 FEB 06

17 FEB 06

17 FEB 06

17 FEB 06

17 FEB 06

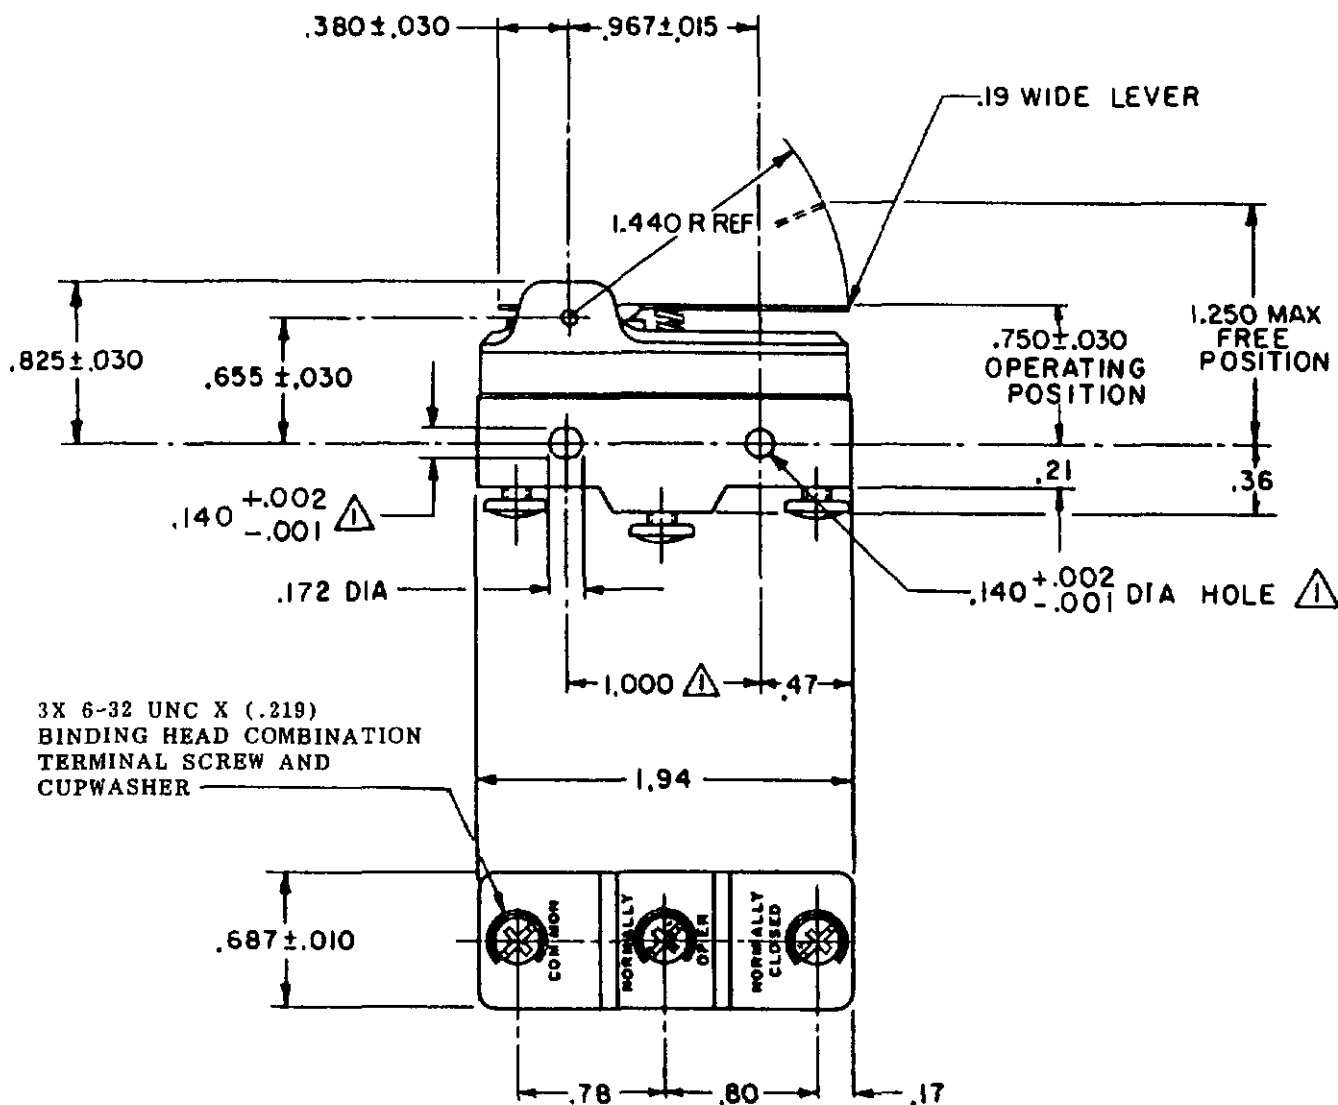


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS


OPERATING FORCE ----- 6 OZ MAX
RELEASE FORCE ----- 3 OZ MIN
DIFFERENTIAL TRAVEL ----- .030 MAX
OVERTRAVEL ----- .065 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L85
15A 125, 250 OR 480 VAC
1/2 HP 125 VAC, 1 HP 250 VAC

L288
L315
L306



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT .050 LB

FORMTEK

FO-52848-B

DRAWN

17 FEB 06

17 FEB 06

17 FEB 06

17 FEB 06

17 FEB 06