

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL


FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BA-2R24-A2

PRODUCT CODE: ABG2550

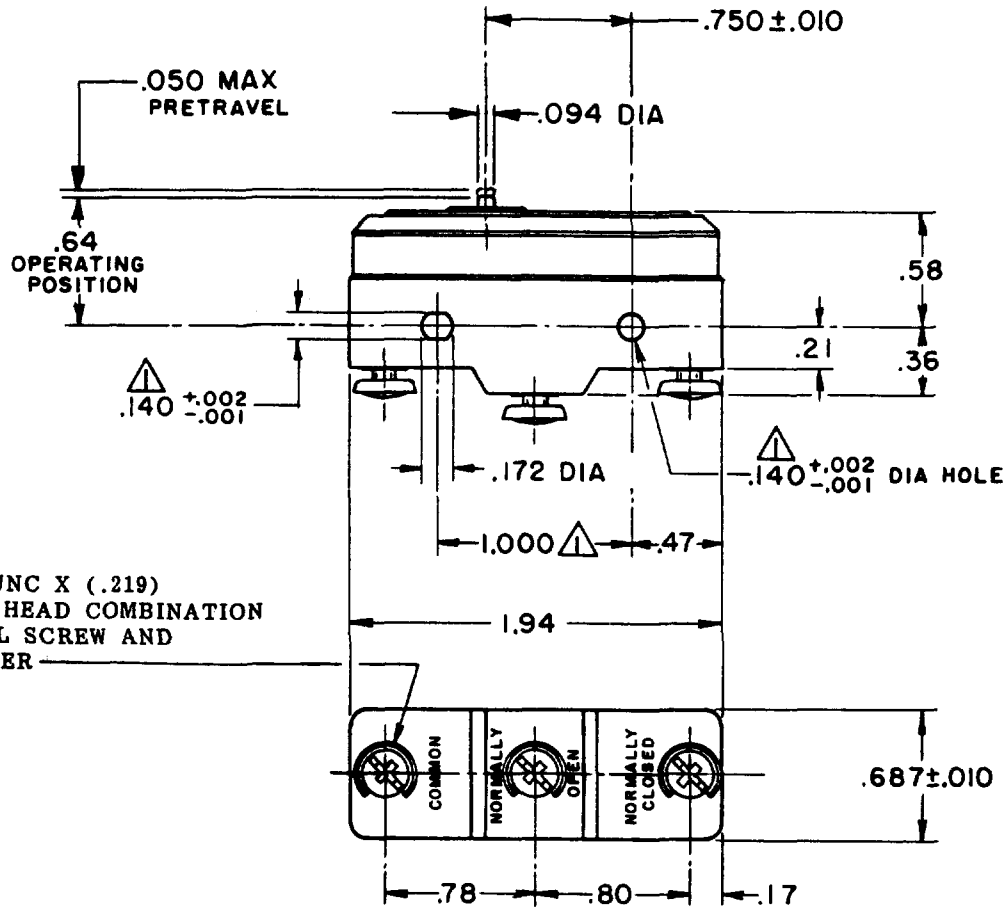

3X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER

NOTE-

- ▲ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2- SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 14 - 22 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 10 OZ MIN	L23B 20A - 125, 250 OR 480 VAC 10A - 125 VAC "L" 1HP - 125 VAC, 2HP - 250 VAC 1/2A - 125 VDC, 1/4A - 250 VDC	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES
DIFFERENTIAL TRAVEL ----- .0020 - .0075	L288 L308 L315	WEIGHT .063 LB
OVERTRAVEL ----- .010 MIN	CE T85 5E4	

BA-2R24-A2

M

DRAWING
NUMBER

ISSUE

5

REPLACES

RELEASE NO. PR-1050

23NOV05

RJ

CHECK

70

1 FEB 83

DLT

22 AUG 98

C 0016786

SPK

23NOV05

D 0033746

JA

12SEP07

CHECK

PSR

12SEP07

CHECK

69

GCH

RASTER

FO-50378-1A

DRAWN