

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH - BASIC

X112148-BA

BA-2R281-A2

—

REPLACES

PR-24218

RELEASE NO

CHECK

CHEN Y

3 AUG 99


JAF

CHECK

3 AUG 99

FORMTEX

DRAWN

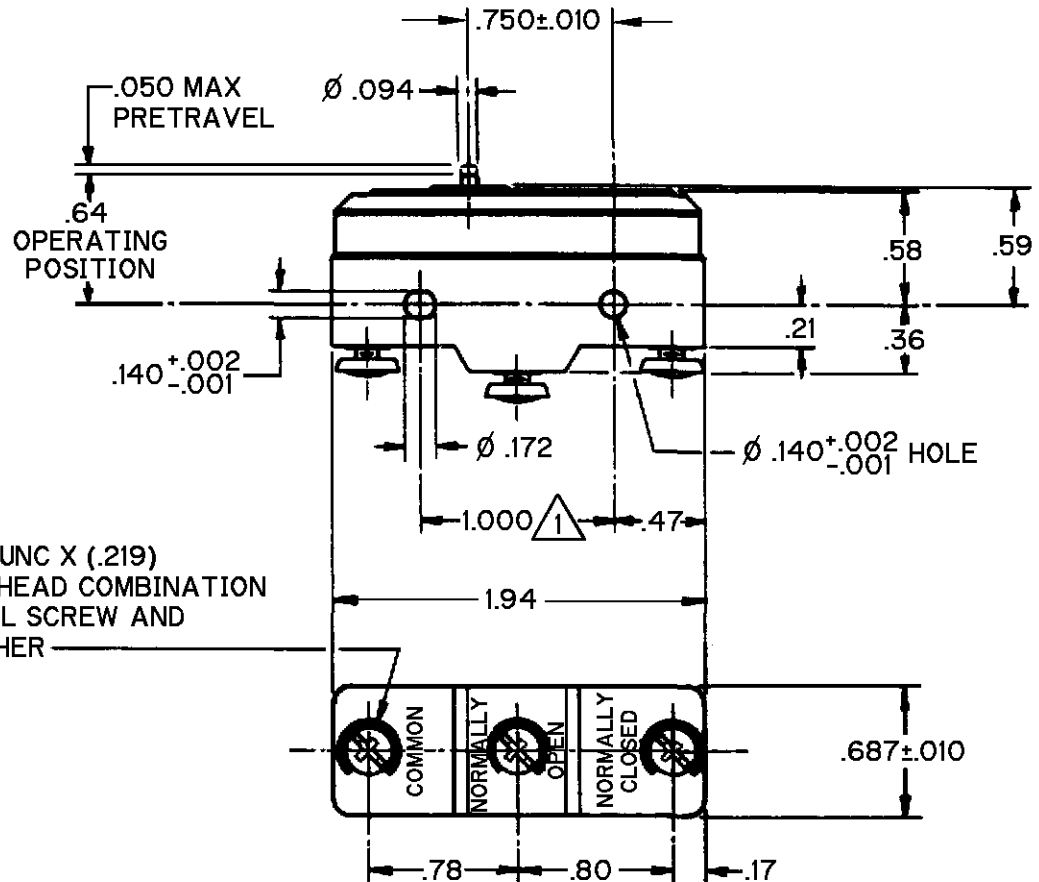

3X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUP WASHER _____

NOTE




MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF Ø .139 MAX ON 1.000±.002 CENTERS

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE - - - - - 14 - 22 OZ	CONTACT ARRANGEMENT	UNLESS OTHERWISE SPECIFIED	
RELEASE FORCE - - - - - 10 OZ MIN	S.P.D.T.	TOLERANCES ARE	
DIFFERENTIAL TRAVEL - - - - - .0020-.0055	L145 20A 125, <u>250</u> OR 480 VAC	ONE PLACE (.0) ±.030	
OVERTRAVEL - - - - - .010 MIN	10A 125 VAC "L"	TWO PLACE (.00) ±.015	
BREAK DISTANCE - - - - - .020 MIN	1HP 125 VAC, 2HP <u>250</u> VAC	THREE PLACE (.000) ±.005	
	1/2A 125 VDC, 1/4A 250 VDC	ANGLES ±	
	2A 600 VAC	WEIGHT .063 LB	
	L288  		
	L299  		
	L308 20(3)A 250V ~ T85 5E4		